

LEED 2009 FOR NEIGHBOURHOOD DEVELOPMENT with Canadian Alternative Compliance Paths

For Public Use and Display

LEED 2009 for Neighbourhood Development Rating System
with Canadian Alternative Compliance Paths

Created by the Congress for the New Urbanism, Natural
Resources Defense Council, the U.S. Green Building Council,
and the Canada Green Building Council
(December 2011)



PREFACE FROM USGBC AND CAGBC

The built environment has a profound impact on our natural environment, economy, health, and productivity. Through their Leadership in Environmental and Energy Design (LEED®) certification programs, the U.S. Green Building Council (USGBC) and the Canada Green Building Council (CaGBC) are transforming the built environment. The green building movement offers an unprecedented opportunity to respond to the most important challenges of our time, including global climate change, dependence on nonsustainable and expensive sources of energy, and threats to human health. The work of innovative building planning professionals is a fundamental driving force in the green development movement. Such leadership is a critical component to achieving the USGBC's mission of a sustainable built environment for all within a generation, and the CaGBC's mission of a transformed built environment leading to a sustainable future.

USGBC AND CAGBC MEMBERSHIP

The USGBC and the CaGBC's greatest strengths are the diversity of their membership. The USGBC and the CaGBC are balanced, consensus-based nonprofits with more than 20,000 member companies and organizations representing the entire building industry. Since their inception, the USGBC and CaGBC have played a vital role in providing a leadership forum and a unique, integrating force for the building industry. USGBC and CaGBC programs have three distinguishing characteristics:

Committee-based

The heart of this effective coalition is our committee structure, in which volunteer members design strategies that are implemented by staff and expert consultants. Our committees provide a forum for members to resolve differences, build alliances, and forge cooperative solutions for influencing change in all sectors of the building industry.

Member-driven

Membership is open and balanced and provides a comprehensive platform for carrying out important programs and activities. We target the issues identified by our members as the highest priority. We conduct an annual review of achievements that allows us to set policy, revise strategies, and devise work plans based on members' needs.

Consensus-focused

We work together to promote green buildings and neighbourhoods, and in doing so, we help foster greater economic vitality and environmental health at lower costs. We work to bridge ideological gaps between industry segments and develop balanced policies that benefit the entire industry.

Contact the U.S. Green Building Council:

2101 L Street, NW
Suite 500
Washington, DC 20037
(800) 795-1747 Office
(202) 828-5110 Fax
www.usgbc.org

Contact the Canada Green Building Council:

47 Clarence St.
Suite 202
Ottawa, Ontario K1N 9K1
1-866-941-1184 Office
1-613-241-4782 Fax
www.cagbc.org

PARTNERSHIP

The Congress for the New Urbanism and the Natural Resources Defense Council collaborated with the U.S. Green Building Council in creating the LEED for Neighbourhood Development Rating System. USGBC's consensus-focused approach to rating system development was furthered by these organizations' expertise in New Urbanism and smart growth strategies.

The Canada Green Building Council collaborated with the U.S. Green Building Council to develop Canadian Alternative Compliance Paths (ACPs) for the LEED 2009 for Neighbourhood Development rating system.

COPYRIGHT

Copyright © 2009 by the U.S. Green Building Council, Inc. All rights reserved.

The U.S. Green Building Council, Inc. (USGBC®) devoted significant time and resources to create this LEED® Rating System. USGBC authorizes individual use of the LEED Rating System. In exchange for this authorization, the user agrees:

1. to retain all copyright and other proprietary notices contained in the LEED Rating System,
2. not to sell or modify the LEED Rating System, and
3. not to reproduce, display, or distribute the LEED Rating System in any way for any public or commercial purpose.

Unauthorized use of the LEED Rating System violates copyright, trademark, and other laws and is prohibited.

DISCLAIMER

None of the parties involved in the funding or creation of the LEED Rating System, including USGBC, its members, volunteers, or contractors, assume any liability or responsibility to the user or any third parties for the accuracy, completeness, or use of or reliance on any information contained in the LEED Rating System, or for any injuries, losses, or damages (including, without limitation, equitable relief) arising from such use or reliance. Although the information contained in the LEED Rating System is believed to be reliable and accurate, all materials set forth within are provided without warranties of any kind, either express or implied, including but not limited to warranties of the accuracy or completeness of information or the suitability of the information for any particular purpose.

As a condition of use, the user covenants not to sue and agrees to waive and release the U.S. Green Building Council, its members, volunteers, and contractors from any and all claims, demands, and causes of action for any injuries, losses, or damages (including, without limitation, equitable relief) that the user may now or hereafter have a right to assert against such parties as a result of the use of, or reliance on, the LEED Rating System.

U.S. Green Building Council
2101 L Street, NW
Suite 500
Washington, DC 20037

TRADEMARKS

USGBC®, U.S. Green Building Council®, and LEED® are registered trademarks of the U.S. Green Building Council, Inc.

ACKNOWLEDGMENTS

The CaGBC gratefully acknowledges the following organizations for their generous support for the development of Canadian LEED for Neighbourhood Development resources:



The LEED 2009 for Neighbourhood Development with Canadian Alternative Compliance Paths Rating System has been made possible only through the efforts of many dedicated volunteers, consultants, and others in the green building community, as well as staff members from the USGBC, the CaGBC, the Congress for the New Urbanism and the Natural Resources Defense Council. The rating system development work was managed and implemented by USGBC and CaGBC staff, and the US and Canadian LEED for Neighbourhood Development Core Committees. Development work included review and input by USGBC staff and Technical Advisory Group (TAG) members, with oversight by the USGBC's LEED Steering Committee. We extend our deepest gratitude to all of our LEED committee members who participated in the development of this rating system, and especially the LEED for Neighbourhood Development Core Committees, for their tireless volunteer efforts and support of the USGBC and CaGBC missions:

USGBC Committees

LEED Steering Committee

Scot Horst, Former Chair	U.S. Green Building Council
Joel Ann Todd, Vice-Chair	Joel Ann Todd
Neal Billetdeaux	JJR
Bryna Dunn	Moseley Architects
Stu Carron	JohnsonDiversey, Inc.
Holley Henderson	H2 Ecodesign, LLC
Greg Kats	Good Energies
Malcolm Lewis	CTG Energetics, Inc.
Christine Magar	Greenform
Muscoe Martin	M2 Architecture
Jessica Millman	Agora DC
Sara O'Mara	Choate Construction Company
Kristin Shewfelt	Architectural Energy Corporation
Lynn Simon	Simon and Associates, Inc.
Bob Thompson	U.S. Environmental Protection Agency, Indoor Environments Management Branch
Mark Webster	Simpson Gumpertz & Heger

Energy and Atmosphere TAG

Marcus Sheffer, Chair	Energy Opportunities/7Group
Chris Schaffner	The Green Engineer, LLP
John Adams	U.S. General Services Administration
Lane Burt	Natural Resources Defense Council
Allan Daly	Taylor Engineering
Charles Dorgan	University of Wisconsin–Madison
Jay Enck	Commissioning & Green Building Solutions
Ellen Franconi	Architectural Energy Corporation
Scott Frank	Jaros Baum & Bolles
Nathan Gauthier	Harvard Office for Sustainability
Gail Hampsmire	CTG Energetics, Inc.
John Hogan	City of Seattle
Bion Howard	Building Environmental Science and Technology
Rusty Hodapp	Dallas/Fort Worth Airport Board
Greg Kats	Good Energies
Dan Katzenberger	Engineering, Energy, and the Environment
Richard Lord	Carrier Corporation
Bob Maddox	Sterling Planet
Brenda Morawa	BVM Engineering, Inc.
Erik Ring	LPA, Inc.
Michael Rosenberg	U.S. Department of Energy, Pacific Northwest National Laboratory
Greg San Martin	PG&E
Gordon Shymko	G.F. Shymko & Associates
Mick Schwedler	The Trane Company
Jorge Torres Coto	mbo, Inc.
Tate Walker	Energy Center of Wisconsin
Michael Zimmer	Thompson Hine LLP

Location and Planning TAG

Ted Bardacke, Chair	Global Green USA
Justin Horner, Vice-Chair	Natural Resources Defense Council
Laurence (LJ) Aurbach	Office of Laurence Aurbach
Uwe Brandes	Urban Land Institute
Fred Dock	City of Pasadena
Bruce Donnelly	Auricity
Reid Ewing	University of Utah
Lois Fisher	Fisher Town Design, Inc.
Tim Frank	Sierra Club
Norman Garrick	University of Connecticut
Ron Kilcoyne	Greater Bridgeport Transit
Dana Little	Treasure Coast Regional Planning Council
Steve Mouzon	New Urban Guild
Lucy Rowland	Athens-Clarke Co. Planning Commission
Harrison Rue	ICF International
Tony Sease	Civitech, Inc
Laurie Volk	Zimmerman/Volk Associates

Materials and Resources TAG

Steven Baer, Chair	Five Winds International
Lee Gros, Vice-Chair	Lee Gros Architect and Artisan, Inc.
Paul Bertram	Kingspan
Paul Bierman-Lytle	Renomics Corporation
Steve Brauneis	Rocky Mountain Institute
Amy Costello	Armstrong World Industries
Chris Dixon	NBBJ
Ann Edminster	Design AVenues
Chris Geiger	San Francisco Department of the Environment
Avi Golen	Construction Waste Management
Brad Guy	Building Materials Reuse Association
Rick Levin	Kahler Slater, Inc.
Nadav Malin	BuildingGreen, LLC
Nancy Malone	Siegel & Strain Architects
Joep Meijer	The Right Environment Ltd. Co.
Kriten Ritchie	Gensler
Raymond Smith	U.S. Environmental Protection Agency
Wayne Trusty	Athena Sustainable Materials Institute
Denise Van Valkenburg	MASCO Retail Cabinet Group
Mark Webster	Simpson Gumpertz & Heger
Gabe Wing	Herman Miller, Inc

Sustainable Sites TAG

Steven Benz, Chair	Sasaki Associates
Alfred Vick, Vice-Chair	University of Georgia
Michele Adams	Meliora Environmental Design
Neal Billetdeaux	JJR
Gina Bocra	Burt Hill
Mark Brumbaugh	Brumbaugh & Associates
Joby Carlson	Global Institute of Sustainability, Arizona State University
Jenny Carney	YRG Sustainability
Laura Case	BMV-Engineering, Inc.
Stewart Comstock	Maryland Department of the Environment
Stephen Cook	Brickman
Bryna Dunn	Moseley Architects
Jay Enck	Commissioning & Green Building Solutions
Ron Hand	E/FECT. Sustainable Design Solutions
Richard Heinisch	Acuity Lighting Group
Heather Holdridge	Lake Flato Architects
Jason King	Greenworks, PC
Michael Lane	Lighting Design Lab
Marita Roos	HNTB Corporation
Katrina Rosa	Eco>Logic Studio
Zolna Russell	Hord Coplan Macht, Inc.
Kyle Thomas	Natural Systems Engineering

Water Efficiency TAG

Neal Billetdeaux, Chair	JJR
John Koeller, Vice-Chair	Koeller and Company
Damann Anderson	Hazen & Sawyer, P.C.
Gunnar Baldwin	TOTO USA, INC
Robert Benazzi	Jaros Baum & Bolles
Doug Bennett	Southern Nevada Water Authority
David Bracciano	Tampa Bay Water
David Carlson	Columbia University
Ron Hand	E/FECT. Sustainable Design Solutions
Bill Hoffman	H.W. Hoffman and Associates
Winston Huff	SSR Engineers
Joanna Kind	Eastern Research Group, inc.
Heather Kinkade	ARCADIS
Don Mills	Clivus Multrum, Inc.
Geoff Nara	Civil & Environmental Consultants, Inc
Karen Poff	Austin Energy
Shabbir Rawalpindiwala	Kohler Co.
Neil Rosen	North Shore LIJ Health System
Robert Rubin	McKim and Creed
Stephanie Tanner	U.S. Environmental Protection Agency
Bill Wall	Clivus New England, Inc.
Daniel Yeh	University of South Florida

LEED for Neighbourhood Development Core Committee

The LEED 2009 for Neighbourhood Development Rating System is the work of members of the LEED for Neighbourhood Development Core Committee, both those who have worked on this version and those who helped create previous versions. In addition, staff would like to thank Criterion Planners, Urban Advantage, and AECOM for the graphics.

Current Members

Jessica Millman, Chair	Agora DC
Bert Gregory, Vice-Chair	Mithun
Susan Mudd, Vice-Chair	The Congress for the New Urbanism
Ted Bardacke	Global Green USA
Constance Beaumont	Oregon Department of Land Conservation and Development
Kaid Benfield	Natural Resources Defense Council
John Dalzell	Boston Redevelopment Authority
Victor Dover	Dover, Kohl & Partners
Lee Epstein	Chesapeake Bay Foundation
Douglas Farr	Farr Associates
Tim Frank	Sierra Club
Daniel Hernandez	Jonathan Rose Companies
Bruce Knight	City of Champaign, IL
John Norquist	The Congress for the New Urbanism
Ken Potts	McGough Companies

Former Members

Eliot Allen	Criterion Planners
Dana Beach	Coastal Conservation League
Bill Browning	Terrapin Bright Green
Sharon Feigon	I-Go Car Sharing
Rebecca Flora	U.S. Green Building Council
Justin Horner	Natural Resources Defense Council
Melissa Knott	Forest City Enterprises
Megan Lewis	JF New
Michael Pawlukiewicz	Urban Land Institute
Shelley Poticha	U.S. Department of Housing and Urban Development
Tom Richman	Office of Tom Richman
Elizabeth Schilling	Smart Growth Leadership Institute
Laura Watchman	Watchman Consulting
Sandy Wiggins	Conscilience, LLC

CAGBC LEED FOR NEIGHBOURHOOD DEVELOPMENT COMMITTEES

Core Committee - Current Members

Jamie James, Co-Chair	Tridel, TowerLabs@MaRS
Dan Leeming, Co-Chair	The Planning Partnership
Nathalie Boucher	Ministère des Ressources naturelles et de la Faune
Larry Brydon	Reliance Home Comfort
Rob Buchan	District of North Saanich
Marisa Creatore	Centre for Research on Inner City Health at St. Michael's Hospital
Eben Hamilton	PCL Constructors Canada Inc.
Elana Horowitz	Ad personum (urban designer, MCIP RPP, LEED AP)
Steve Krossey	BA Consulting Group
Glenn MacMillan	Toronto and Region Conservation Authority
Gavin Maher	Infrastructure Ontario
Faisal Moola	David Suzuki Foundation
Odete Pinho	HB Lanarc-Golder
Doug Pollard	Canada Mortgage and Housing Corporation
Michael Pozzebon	Metrus Development Inc.
Rodney Wilts	BuildGreen Solutions

Core Committee - Former Members

Cameron Barker	ZAS Architects
Rob Bennett	Portland Sustainability Institute
Andrew Cowan	Federation of Canadian Municipalities
Lisa Hardess	Centre for Indigenous Environmental Resources
Mark Holland	New Monaco Enterprise Corporation
Rambod Nasrin	Tridel
Richard Rebneris	Stantec Consulting Ltd.
Jodie Siu	Smart Growth BC
Martin Thibeault	Ministère des Ressources naturelles et de la Faune

Sub-committee Members

Emilie Adin	City of North Vancouver
Michael Billowits	Quantum Murray LP
Dr. Gillian Booth	St. Michael's Hospital
Éric Chabot	Société de transport de Sherbrooke
Laurent Chevrot	Société de transport de Sherbrooke
Ken Church	Natural Resources Canada
Scott Demark	BuildGreen Solutions
Dr. James Dunn	McMaster University
Mario Giambattista	Bratty and Partners
Dr. Richard Glazier	University Of Toronto, St. Michael's Hospital
Mark Gorgolewski	Ryerson University
Peter Gozdyra	Institute for Clinical Evaluative Sciences
John Kieran	Solar EDF EN Canada Inc.
Renée Lazarowich	Natural Resources Canada
Richard MacIntosh	Halsall Associates
Craig MacIntyre	Provident Energy Management Inc.
Eleanor McAteer	City of Toronto
Dan Menard	Trow Associates
Nick Poulos	Poulos & Chung Transportation Engineers
Susan Ross	Public Works and Government Services Canada
Derek Satnik	Mindscape Innovations
Bhavna Sivanand	Peel Region Public Health
Jonathan Weyman	York University
Thomas Woodhall	BA Consulting Group

LEED 2009 FOR NEIGHBOURHOOD DEVELOPMENT WITH CANADIAN ALTERNATIVE COMPLIANCE PATHS PROJECT CHECKLIST

Smart Location and Linkage

27 possible points

<input checked="" type="checkbox"/>	Prerequisite 1	Smart Location	Required
<input checked="" type="checkbox"/>	Prerequisite 2	Imperiled Species and Ecological Communities	Required
<input checked="" type="checkbox"/>	Prerequisite 3	Wetland and Water Body Conservation	Required
<input checked="" type="checkbox"/>	Prerequisite 4	Agricultural Land Conservation	Required
<input checked="" type="checkbox"/>	Prerequisite 5	Floodplain Avoidance	Required
<input type="checkbox"/>	Credit 1	Preferred Locations	10
<input type="checkbox"/>	Credit 2	Brownfield Redevelopment	2
<input type="checkbox"/>	Credit 3	Locations with Reduced Automobile Dependence	7
<input type="checkbox"/>	Credit 4	Bicycle Network and Storage	1
<input type="checkbox"/>	Credit 5	Housing and Jobs Proximity	3
<input type="checkbox"/>	Credit 6	Steep Slope Protection	1
<input type="checkbox"/>	Credit 7	Site Design for Habitat or Wetland and Water Body Conservation	1
<input type="checkbox"/>	Credit 8	Restoration of Habitat or Wetlands and Water Bodies	1
<input type="checkbox"/>	Credit 9	Long-Term Conservation Management of Habitat or Wetlands and Water Bodies	1

Neighbourhood Pattern and Design

44 possible points

<input checked="" type="checkbox"/>	Prerequisite 1	Walkable Streets	Required
<input checked="" type="checkbox"/>	Prerequisite 2	Compact Development	Required
<input checked="" type="checkbox"/>	Prerequisite 3	Connected and Open Community	Required
<input type="checkbox"/>	Credit 1	Walkable Streets	12
<input type="checkbox"/>	Credit 2	Compact Development	6
<input type="checkbox"/>	Credit 3	Mixed-Use Neighbourhood Centres	4
<input type="checkbox"/>	Credit 4	Mixed-Income Diverse Communities	7
<input type="checkbox"/>	Credit 5	Reduced Parking Footprint	1
<input type="checkbox"/>	Credit 6	Street Network	2
<input type="checkbox"/>	Credit 7	Transit Facilities	1
<input type="checkbox"/>	Credit 8	Transportation Demand Management	2
<input type="checkbox"/>	Credit 9	Access to Civic and Public Spaces	1
<input type="checkbox"/>	Credit 10	Access to Recreation Facilities	1
<input type="checkbox"/>	Credit 11	Visitability and Universal Design	1
<input type="checkbox"/>	Credit 12	Community Outreach and Involvement	2
<input type="checkbox"/>	Credit 13	Local Food Production	1
<input type="checkbox"/>	Credit 14	Tree-Lined and Shaded Streets	2
<input type="checkbox"/>	Credit 15	Neighbourhood Schools	1

Green Infrastructure and Buildings

29 possible points

<input checked="" type="checkbox"/>	Prerequisite 1	Certified Green Building	Required
<input checked="" type="checkbox"/>	Prerequisite 2	Minimum Building Energy Efficiency	Required
<input checked="" type="checkbox"/>	Prerequisite 3	Minimum Building Water Efficiency	Required
<input checked="" type="checkbox"/>	Prerequisite 4	Construction Activity Pollution Prevention	Required
<input type="checkbox"/>	Credit 1	Certified Green Buildings	5
<input type="checkbox"/>	Credit 2	Building Energy Efficiency	2
<input type="checkbox"/>	Credit 3	Building Water Efficiency	1
<input type="checkbox"/>	Credit 4	Water-Efficient Landscaping	1
<input type="checkbox"/>	Credit 5	Existing Building Reuse	1
<input type="checkbox"/>	Credit 6	Historic Resource Preservation and Adaptive Use	1
<input type="checkbox"/>	Credit 7	Minimized Site Disturbance in Design and Construction	1
<input type="checkbox"/>	Credit 8	Stormwater Management	4
<input type="checkbox"/>	Credit 9	Heat Island Reduction	1
<input type="checkbox"/>	Credit 10	Solar Orientation	1
<input type="checkbox"/>	Credit 11	On-Site Renewable Energy Sources	3
<input type="checkbox"/>	Credit 12	District Heating and Cooling	2
<input type="checkbox"/>	Credit 13	Infrastructure Energy Efficiency	1
<input type="checkbox"/>	Credit 14	Wastewater Management	2
<input type="checkbox"/>	Credit 15	Recycled Content in Infrastructure	1
<input type="checkbox"/>	Credit 16	Solid Waste Management Infrastructure	1
<input type="checkbox"/>	Credit 17	Light Pollution Reduction	1

Innovation and Design Process

6 possible points

<input type="checkbox"/>	Credit 1	Innovation and Exemplary Performance	1-5
<input type="checkbox"/>	Credit 2	LEED® Accredited Professional	1

LEED 2009 for Neighbourhood Development Certification Levels

100 base points plus 6 possible Innovation and Design Process points

Certified	40–49 points
Silver	50–59 points
Gold	60–79 points
Platinum	80 points and above

TABLE OF CONTENTS

Preface		i
Acknowledgments		iii
LEED 2009 for Neighbourhood Development Project Checklist		ix
Introduction		xiii
I. The Case for Green Neighbourhood Developments		xiii
II. LEED® Rating System™		xiii
III. Overview and Process		xvi
IV. Exemplary Performance		xxii
V. Regional Priority		xxii
Smart Location and Linkage (SLL)		1
Prerequisite 1	Smart Location	1
Prerequisite 2	Imperilled Species and Ecological Communities Conservation	12
Prerequisite 3	Wetland and Water Body Conservation	14
Prerequisite 4	Agricultural Land Conservation	17
Prerequisite 5	Floodplain Avoidance	23
Credit 1	Preferred Locations	27
Credit 2	Brownfields Redevelopment	33
Credit 3	Locations with Reduced Automobile Dependence	35
Credit 4	Bicycle Network and Storage	40
Credit 5	Housing and Jobs Proximity	42
Credit 6	Steep Slope Protection	45
Credit 7	Site Design for Habitat or Wetland and Water Body Conservation	47
Credit 8	Restoration of Habitat or Wetlands and Water Bodies	51
Credit 9	Long-Term Conservation Management of Habitat or Wetlands and Water Bodies	52
Neighbourhood Pattern and Design (NPD)		53
Prerequisite 1	Walkable Streets	53
Prerequisite 2	Compact Development	56
Prerequisite 3	Connected and Open Community	58
Credit 1	Walkable Streets	62
Credit 2	Compact Development	68
Credit 3	Mixed-Use Neighbourhood Centres	70
Credit 4	Mixed-Income Diverse Communities	74
Credit 5	Reduced Parking Footprint	77
Credit 6	Street Network	79
Credit 7	Transit Facilities	81

Credit 8	Transportation Demand Management	82
Credit 9	Access to Civic and Public Space	84
Credit 10	Access to Recreation Facilities	86
Credit 11	Visitability and Universal Design	87
Credit 12	Community Outreach and Involvement	93
Credit 13	Local Food Production	94
Credit 14	Tree-Lined and Shaded Streets	96
Credit 15	Neighbourhood Schools	98
Green Infrastructure and Buildings (GIB)		99
Prerequisite 1	Certified Green Building	99
Prerequisite 2	Minimum Building Energy Efficiency	101
Prerequisite 3	Minimum Building Water Efficiency	105
Prerequisite 4	Construction Activity Pollution Prevention	109
Credit 1	Certified Green Buildings	110
Credit 2	Building Energy Efficiency	112
Credit 3	Building Water Efficiency	116
Credit 4	Water-Efficient Landscaping	121
Credit 5	Existing Building Reuse	121
Credit 6	Historic Resource Preservation and Adaptive Use	123
Credit 7	Minimized Site Disturbance in Design and Construction	125
Credit 8	Stormwater Management	127
Credit 9	Heat Island Reduction	130
Credit 10	Solar Orientation	131
Credit 11	On-Site Renewable Energy Sources	133
Credit 12	District Heating and Cooling	134
Credit 13	Infrastructure Energy Efficiency	135
Credit 14	Wastewater Management	136
Credit 15	Recycled Content in Infrastructure	137
Credit 16	Solid Waste Management Infrastructure	138
Credit 17	Light Pollution Reduction	139
Innovation and Design Process (IDP)		142
Credit 1	Innovation and Exemplary Performance	142
Credit 2	LEED Accredited Professional	143
Regional Priority Credit (RPC)		144
Credit 1	Regional Priority	144
Appendix. Diverse Uses		145
Glossary		146

INTRODUCTION

I. THE CASE FOR GREEN NEIGHBOURHOOD DEVELOPMENTS

As the U.S. population continues to expand rapidly, consumption of land grows exponentially—currently, three times the rate of population growth. At this breathtaking pace, two-thirds of U.S. development on the ground in 2050 will be built between now and then.¹ In Canada, between 1971 and 2001, the number of urban dwellers increased by approximately 50%, while the consumption of land for urban uses increased by 96%.² This increase in urbanized land, approximately 15,200 square kilometers, is almost three times the size of Prince Edward Island, and much of the land consumed was high-quality farmland.³ The way we grow—especially how and where we grow—will have a profound effect on our planet and on us.

Land use and neighbourhood design patterns create a particular physical reality and compel behaviors that have a significant effect on the environmental performance of a given place. Segregated land uses accessed by high-speed roadways that necessitate the use of cars have been the predominant development pattern over the past 50 years. In North America, transportation accounts for roughly one-third of greenhouse gas emissions, a large portion of which can be attributed to personal automobile use.⁴ Burning fossil fuels for transportation increases air pollution and related respiratory diseases. Automobile-oriented neighbourhoods tend to be hostile to pedestrians and unsupportive of traditional mixed-use neighbourhood centres. Sprawling development patterns fragment habitat, endanger sensitive land and water bodies, destroy precious farmland, and increase the burden on municipal infrastructure.

In contrast, by placing residences and jobs proximate to each other, thoughtful neighbourhood planning and development can limit automobile trips and the associated greenhouse gas emissions. Mixed-use development and walkable streets encourage walking, bicycling, and public transportation for daily errands and commuting. Environmentally responsible buildings and infrastructure are an important component of any green neighbourhood, further reducing greenhouse gas emissions by decreasing energy consumption. Green buildings and infrastructure also lessen negative consequences for water resources, air quality, and natural resource consumption.

Green neighbourhood developments are beneficial to the community and the individual as well as the environment. The character of a neighbourhood, including its streets, homes, workplaces, shops, and public spaces, significantly affects the quality of life. Green neighbourhood developments enable a wide variety of residents to be part of the community by including housing of varying types and price ranges. Green developments respect historical resources and the existing community fabric; they preserve open space and encourage access to parks. Green buildings, community gardens, and streets and public spaces that encourage physical activity are beneficial for public health. Combine the substantial environmental and social benefits and the case for green neighbourhoods makes itself.

II. LEED® RATING SYSTEMS

Background on LEED®

Following the formation of the U.S. Green Building Council (USGBC) in 1993, the organization's members quickly realized that the sustainable building industry needed a system to define and measure "green buildings." USGBC began to research existing green building metrics and rating systems. Less than a year after formation, the members

1 Reid Ewing, Keith Bartholomew, Steve Winkelman, Jerry Walters, and Don Chen, *Growing Cooler: The Evidence on Urban Development and Climate Change* (Washington, D.C.: Urban Land Institute, 2008).

2 *Rural and Small Town Canada Analysis Bulletin*, Vol. 6, No. 1 (Statistics Canada, January 2005).

3 *Rural and Small Town Canada Analysis Bulletin*, Vol. 3, No. 2 (Statistics Canada, September 2001).

4 "Greenhouse Gases, Climate Change, and Energy" (Energy Information Administration, May 2008).

acted on the initial findings by establishing a committee to focus solely on this topic. The composition of the committee was diverse; it included architects, real estate agents, a building owner, a lawyer, an environmentalist, and industry representatives. This cross section of people and professions added a richness and depth both to the process and to the ultimate product, the Leadership in Energy and Environmental Design (LEED) certification system.

The first LEED Pilot Project Program, also referred to as LEED Version 1.0, was launched at the USGBC Membership Summit in August 1998. After extensive modifications, LEED Green Building Rating System Version 2.0 was released in March 2000, with LEED Version 2.1 following in 2002 and LEED Version 2.2 following in 2005.

As LEED has evolved and matured, the program has undertaken new initiatives. In addition to a rating system specifically devoted to building operational and maintenance issues (LEED for Existing Buildings: Operations & Maintenance), LEED addresses the different project development and delivery processes that exist in the U.S. building design and construction market, through rating systems for specific building typologies, sectors, and project scopes: LEED for Core & Shell, LEED for New Construction, LEED for Schools, LEED for Retail, LEED for Healthcare, LEED for Homes, and LEED for Commercial Interiors. LEED for Neighbourhood Development is the latest LEED certification system to be released.

The green building and neighbourhood development field is growing and changing daily. New technologies and products are being introduced into the marketplace, and innovative designs and practices are proving their effectiveness. The LEED rating systems and reference guides will evolve as well. Project teams must comply with the version of the rating system that is current at the time of their registration. USGBC will highlight new developments on its website on a continual basis, at www.usgbc.org.

Background on LEED for Neighbourhood Development

The U.S. Green Building Council (USGBC), the Congress for the New Urbanism (CNU), and the Natural Resources Defense Council (NRDC)—organizations that represent leading design professionals, progressive builders and developers, and the environmental community—have come together to develop a rating system for neighbourhood planning and development based on the combined principles of smart growth, New Urbanism, and green infrastructure and building. The goal of this partnership is to establish a national leadership standard for assessing and rewarding environmentally superior green neighbourhood development practices within the framework of the LEED® Green Building Rating System™.

Unlike other LEED rating systems, which focus primarily on green building practices and offer only a few credits for site selection and design, LEED for Neighbourhood Development (LEED-ND) places emphasis on the site selection, design, and construction elements that bring buildings and infrastructure together into a neighbourhood and relate the neighbourhood to its landscape as well as its local and regional context. The work of the LEED-ND core committee, made up of representatives from all three partner organizations, has been guided by sources such as the Smart Growth Network's ten principles of smart growth, the charter of the Congress for the New Urbanism, and other LEED rating systems. LEED for Neighbourhood Development creates a label, as well as guidelines for both decision making and development, to provide an incentive for better location, design, and construction of new residential, commercial, and mixed-use developments.

Whereas the other LEED rating systems have five environmental categories, LEED for Neighbourhood Development has three: Smart Location and Linkage, Neighbourhood Pattern and Design, and Green Infrastructure and Buildings. An additional category, Innovation and Design Process, addresses sustainable design and construction issues and measures not covered under the three categories. Regional bonus credits are another feature of LEED-ND. These credits acknowledge the importance of local conditions in determining best environmental design and construction practices as well as social and health practices.

The LEED 2009 minimum program requirements define the minimum characteristics that a project must possess to be eligible for certification under LEED 2009. These requirements do not apply to LEED for Neighbourhood Development projects.

LEED Credit Weightings

In LEED 2009, the allocation of points among credits is based on the potential environmental impacts and human benefits of each credit with respect to a set of impact categories. The impacts are defined as the environmental or human effect of the design, construction, operation, and maintenance of the building, such as greenhouse gas emissions, fossil fuel use, toxins and carcinogens, air and water pollutants, and indoor environmental conditions. In the LEED for Neighbourhood Development Rating System, social and public health benefits were added to the impact categories, and the impact categories were then applied at the neighbourhood scale. A combination of approaches, including energy modeling, life-cycle assessment, and transportation analysis, is used to quantify each type of impact. The resulting allocation of points among credits is called credit weighting.

LEED 2009 uses the U.S. Environmental Protection Agency's TRACI⁵ environmental impact categories as the basis for weighting each credit. TRACI was developed to assist with impact evaluation for life-cycle assessment, industrial ecology, process design, and pollution prevention. LEED 2009 also takes into consideration the weightings developed by the U.S. National Institute of Standards and Technology (NIST); these compare impact categories with one another and assign a relative weight to each. Together, the two approaches provide a solid foundation for determining the point value of each credit in LEED 2009.

The LEED 2009 credit weightings process is based on the following parameters, which maintain consistency and usability across rating systems:

- All LEED credits are worth a minimum of 1 point.
- All LEED credits are positive, whole numbers; there are no fractions or negative values.
- All LEED credits receive a single, static weight in each rating system; there are no individualized scorecards based on project location.
- All LEED rating systems have 100 base points; Innovation and Design Process and Regional Priority credits provide opportunities for up to 10 bonus points.

Given the above criteria, the LEED 2009 credit weightings process involves three steps for LEED for Neighbourhood Development:

1. A reference neighbourhood is used to estimate the environmental impacts in 15 categories associated with a typical neighbourhood development pursuing LEED certification.
2. The relative importance of neighbourhood impacts in each category is set to reflect values based on the NIST weightings.⁶
3. Data that quantify neighbourhood impacts on environmental and human health are used to assign points to individual credits.

Each credit is allocated points based on the relative importance of the neighbourhood-related impacts that it addresses. The result is a weighted average that combines neighbourhood impacts and the relative value of the impact categories. Credits that most directly address the most important impacts are given the greatest weight, subject to the system design parameters described above. Credit weights also reflect a decision by LEED to recognize the market implications of point allocation.

⁵ Tools for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI) (U.S. Environmental Protection Agency, Office of Research and Development, <http://www.epa.gov/nrmrl/std/sab/traci/>).

⁶ Relative impact category weights based on an exercise undertaken by NIST (National Institute of Standards and Technology) for the BEES program, <http://www.bfrl.nist.gov/oe/software/bees/>.

The details of the weightings process vary slightly among individual rating systems. For example, LEED for Neighbourhood Development includes credits related to infill development but LEED for New Construction does not. This results in a difference in the portion of the environmental footprint addressed by each rating system and the relative allocation of points.

The weightings process for each rating system is fully documented in a weightings workbook. The credit weightings process will be reevaluated over time to incorporate changes in values ascribed to different neighbourhood impacts and neighbourhood types, based on both market reality and evolving knowledge related to buildings and neighbourhood design. A complete explanation of the LEED credit weightings system is available on the USGBC website, at www.usgbc.org.

III. OVERVIEW AND PROCESS

The LEED 2009 for Neighbourhood Development Rating System is a set of performance standards for certifying the planning and development of neighbourhoods. The intent is to promote healthful, durable, affordable, and environmentally sound practices in building design and construction.

Prerequisites and credits in the rating system address five topics:

- Smart Location and Linkage (SLL)
- Neighbourhood Pattern and Design (NPD)
- Green Infrastructure and Buildings (GIB)
- Innovation and Design Process (IDP)
- Regional Priority Credit (RPC)

Canadian Alternative Compliance Paths

Canadian Alternative Compliance Paths (ACPs) for the LEED 2009 for Neighbourhood Development rating system were developed for Canadian LEED-ND projects, to provide guidance for portions of the rating system that contain U.S.-specific standards or wording. Where a Canadian ACP exists for a particular prerequisite or credit, it is anticipated that Canadian LEED-ND projects will benefit from choosing this more appropriate option.

When to Use LEED for Neighbourhood Development

The LEED for Neighbourhood Development Rating System responds to land use and environmental considerations. It is designed to certify exemplary development projects that perform well in terms of smart growth, urbanism, and green building. Projects may constitute whole neighbourhoods, portions of neighbourhoods, or multiple neighbourhoods. There is no minimum or maximum size for a LEED-ND project, but the core committee's research has determined that a reasonable minimum size is at least two habitable buildings and that the maximum area that can appropriately be considered a neighbourhood is 320 acres, or half a square mile (approximately 130 hectares). A project larger than 320 acres (130 hectares) is eligible but may find documenting certain credits difficult and may want to consider dividing the area into separate LEED-ND projects, each smaller than 320 acres (130 hectares). Although projects may contain only a single use, typically a mix of uses will provide the most amenities to residents and workers and enable people to drive less and safely walk or bike more. Small infill projects that are single use but complement existing neighboring uses, such as a new affordable-housing infill development in a neighbourhood that is already well served by retail and commercial uses, are also good candidates for certification.

This rating system is designed primarily for the planning and development of new green neighbourhoods, whether infill sites or new developments proximate to diverse uses or adjacent to connected and previously developed land. Many infill projects or projects near transit will be in urban areas, which helps direct growth into places with existing

infrastructure and amenities. LEED-ND also promotes the redevelopment of aging brownfield sites into revitalized neighbourhoods by rewarding connections beyond the site, walkable streets within the site, and the integration of any historic buildings and structures that will give the new neighbourhood development a unique sense of place.

Existing neighbourhoods can also use the rating system, and its application in this context could be especially beneficial in urban areas and historic districts. It is, however, important to point out that the owner or owners applying for certification should already own, have title to, or have significant control over a majority of the land within the project boundary and the plan for new construction or major renovation for the majority of the project's square footage. The new construction could take place on vacant land within the boundary, and the major renovations could involve existing buildings, recent or historic, within the project. In addition to guiding infill development opportunities, LEED-ND has additional relevance for existing neighbourhoods, as a tool to set performance levels for a group of owners wanting to retrofit their homes, offices, or shops, and finally for shaping new green infrastructure, such as sidewalks, alleys, and public spaces. Many prerequisites or credits have a specific compliance path for existing buildings; this is highlighted in the rating system, and more detail is provided in the reference guide.

LEED-ND also can be used in suburban locations. There are tremendous opportunities to retrofit the suburbs, whether this involves reviving old shopping centres and their surrounding parking lots or adding new units and vibrant walkable town centres to existing subdivisions. Increasingly, many suburbs are well served by transit and thus should be considered good candidates for creating mixed-use, walkable developments with the potential to decrease residents' and workers' dependence on personal automobiles.

LEED for Neighbourhood Development was not designed as a rating system for existing campuses, such as colleges, universities, and military bases. Many campuses have circulation patterns and building forms and placement that differ from the strategies outlined in LEED-ND. As a result, the rating system may not be appropriate for such facilities, but it could be applied in certain situations. For example, LEED-ND could be used for a civilian style development on or adjacent to a military base, especially now that there is increased interest in developing mixed-use main streets as a focal point for new residential development in military bases. In addition, LEED-ND could be used to guide the redevelopment of a base as it finds a new use. For colleges and universities, the program best lends itself to campuses that are expanding or undergoing major redevelopment. Increasingly, many universities are creating mixed-use development projects, often with local partners, to serve as catalytic projects in their communities, and LEED-ND could be a good framework and certification tool. Some universities are looking to their own campus lands for new development opportunities, particularly for housing that is affordable to faculty and staff but also walkable to campus and other amenities, and LEED-ND may be appropriate.

LEED for Neighbourhood Development is not meant to be a standard that replaces zoning codes or official community plans, nor has it been designed to certify sector plans or other policy tools. Local development patterns and performance levels vary greatly across North America because land regulation is largely controlled by local governments. One city may be a leader in stormwater management, and another an innovator in traffic calming, but neither may be advanced in all areas covered by LEED-ND. The rating system should therefore not be considered a one-size-fits-all policy tool. Instead, LEED-ND is a voluntary leadership standard, and local governments should consider promoting its use by the development community or public-private partnerships. In addition, LEED-ND can be used to analyze whether existing development regulations, such as zoning codes, development standards, landscape requirements, building codes, or official community plans are "friendly" to sustainable developments. By comparing a locality's development practices with the rating system, public officials and the planning department can better identify code barriers that make it onerous, costly, or even impossible to undertake some aspects of sustainable development. Finally, public sector projects (e.g., those sponsored by housing authorities, redevelopment agencies, or specialized development authorities) are eligible to use the rating system. Please visit the LEED for Neighbourhood Development web page at www.usgbc.org/nd for LEED-ND policy guidance for state and local governments.

“Neighbourhood Development,” Defined

Based on research on the origins of neighbourhood design and current best practices for locating and designing new development, the U.S. LEED for Neighbourhood Development core committee has developed a rating system for smart, healthy, and green neighbourhood development. Although LEED-ND does not strictly define what constitutes a neighbourhood, the prerequisites and credits are written to encourage a type of development that recalls the siting and design of traditional neighbourhoods and promotes best practices in new neighbourhood development today.

Since ancient times, cities around the world have been spatially divided into districts or neighbourhoods. Excavations of some of the earliest cities reveal evidence of social neighbourhoods. Urban scholar Lewis Mumford noted that “neighbourhoods, in some primitive, inchoate fashion exist wherever human beings congregate, in permanent family dwellings; and many of the functions of the city tend to be distributed naturally—that is, without any theoretical preoccupation or political direction—into neighbourhoods.”⁷ In basic terms, a neighbourhood is an area of dwellings, employment, retail, and civic places and their immediate environment that residents and/or employees identify with in terms of social and economic attitudes, lifestyles, and institutions.

A neighbourhood can be considered the planning unit of a town. The charter of the Congress for the New Urbanism characterizes this unit as “compact, pedestrian-friendly, and mixed-use.”⁸ By itself the neighbourhood is a village, but combined with other neighbourhoods it becomes a town or a city. Similarly, several neighbourhoods with their centres at transit stops can constitute a transit corridor. The neighbourhood, as laid out in LEED-ND, is in contrast to sprawl development patterns, which create podlike clusters that are disconnected from surrounding areas. Existing and new traditional neighbourhoods provide an alternative to development patterns that characterize sprawl, such as the single-zoned, automobile-dominated land uses that have been predominant in suburban areas since the 1950s. Instead, traditional neighbourhoods meet all those same needs—for housing, employment, shopping, civic functions, and more—but in formats that are compact, complete, and connected, and ultimately more sustainable and diverse.⁹ The metrics of a neighbourhood vary in density, population, mix of uses, and dwelling types and by regional customs, economies, climates, and site conditions. In general, they include size, identifiable centres and edges, connectedness with the surroundings, walkable streets, and sites for civic uses and social interaction.

Size is a defining feature of a neighbourhood and is typically based on a comfortable distance for walking from the centre of the neighbourhood to its edge; that suggests an area of 40 to 160 acres (16 to 65 hectares). In the 1929 Regional Plan of New York and Environs, urban planner Clarence Perry outlined a neighbourhood centre surrounded by civic uses, parks, residential uses, a school, and retail at the edge, all within one-quarter mile (400 metres)—about a 5-minute walk. This amounts to an area or pedestrian “shed” of 125 acres (50 hectares), or if the land area is a square, 160 acres (65 hectares). Although Perry’s diagram does not address many of the sustainable features of LEED-ND, such as access to multimodal transportation options, location of infrastructure, and building form, it serves as a reference point for the mix of uses and walkable scale of neighbourhood development encouraged in the rating system. Most people will walk approximately one-quarter mile (1,320 feet [400 metres]) to run daily errands; beyond that, many will take a bicycle or car. Additional research shows that people will walk as far as a half-mile (2,640 feet [800 metres]) to reach heavy rail transit systems or more specialized shops or civic uses.¹⁰ Since half a square mile contains 320 acres (130 hectares), the core committee has decided that this size should serve as guidance for the upper limit of a LEED-ND project.


7 Lewis Mumford, “The Neighbourhood and the Neighbourhood Unit,” *Town Planning Review* 24 (1954): 256-270, p. 258.

8 Charter of the Congress for the New Urbanism, www.cnu.org/charter, 1996.

9 Ibid.

10 H. Dittmar and G. Ohland, eds., *The New Transit Town: Best Practices in Transit-Oriented Development* (Washington, D.C.: Island Press, 2004), p. 120.

Figure 3. Examples of neighbourhood morphology. Source: Douglas Farr, *Sustainable Urbanism*

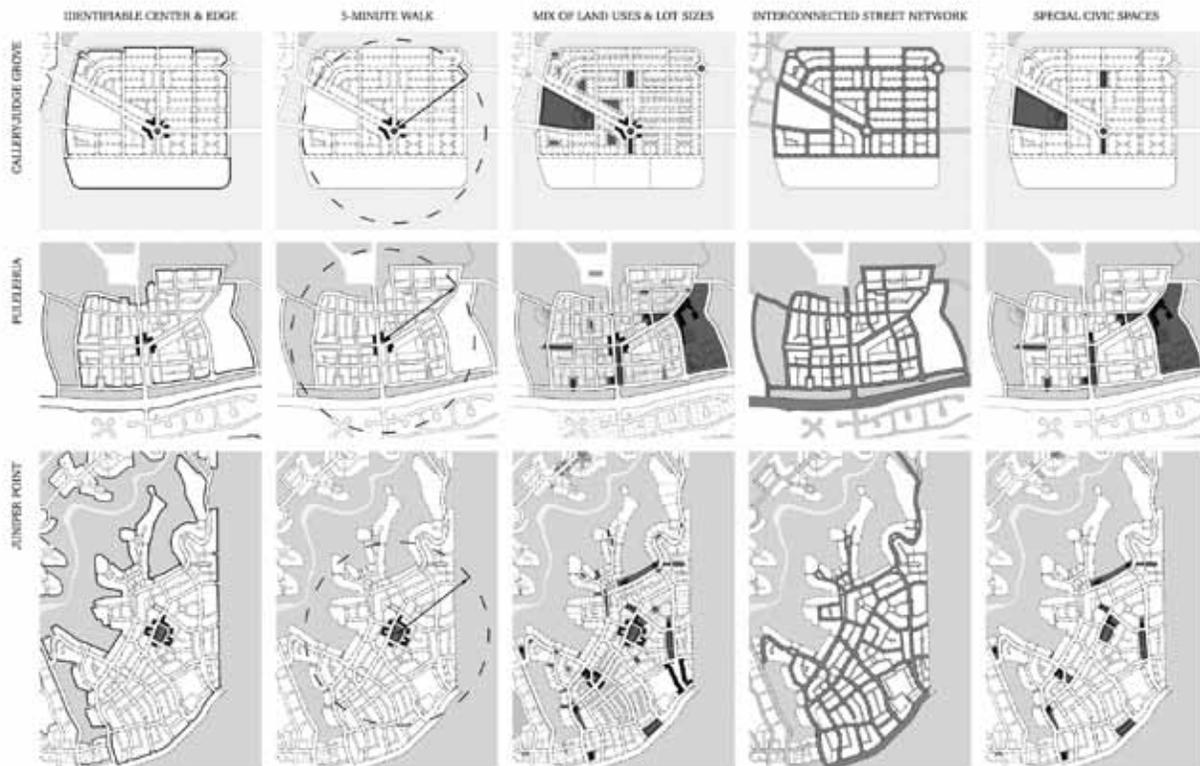

A mix of uses is often integral to the vitality of a neighbourhood; the mix can include not only residential and commercial but also a variety of retail establishments, services, community facilities, and other kinds of “diverse uses,” whether available within the neighbourhood or adjacent. Urban theorist Ray Oldenburg would classify diverse uses as “Third Places”—small neighbourhood grocers, coffee shops, pubs, or post offices that allow residents and workers to mingle and have social interactions. A mix of active and diverse retail uses on a walkable street can create a place that is alive day and night, and not closed down at 6 p.m.

Existing neighbourhoods have the added benefit of historic buildings and events with cultural significance. Jane Jacobs argued that every neighbourhood needed a mixture of newer and older buildings to allow for a variety of uses, income levels, and even ideas within the neighbourhood.¹¹ New neighbourhoods can bring some of the architectural diversity found in existing neighbourhoods by including a mix of uses and housing types, each of which might need a different building type and design, thus generating visual interest. Finally, placing important civic buildings, such as churches, libraries, schools, or local government buildings at the termination of a street can create civic pride and also an interesting vista for pedestrians. With a focus on civic buildings and gathering places and the pedestrian experience in general, it is no surprise that walkable neighbourhoods are often defined by the social interaction among people living and working near one another.

In conclusion, LEED for Neighbourhood Development emphasizes the creation of compact, walkable, vibrant, mixed-use neighbourhoods with good connections to nearby communities. In addition to neighbourhood morphology, pedestrian scale, and mix of uses, the rating system also emphasizes the location of the neighbourhood and the performance of the infrastructure and buildings within it. The sustainable benefits of a neighbourhood increase when it offers proximity to transit and when residents and workers can safely travel by foot or bicycle to

¹¹ Jane Jacobs, *The Death and Life of Great American Cities* (New York: Random House, 1961), p. 187.

jobs, amenities, and services. This can create a neighbourhood with a high quality of life and healthy inhabitants. Likewise, green buildings can reduce energy and water use, and green infrastructure, such as landscaping and best practices to reduce stormwater runoff, can protect natural resources. Together, well-located and well-designed green neighbourhood developments will play an integral role in reducing greenhouse gas emissions and improving quality of life.

Certification

To earn LEED certification, the applicant project must satisfy all the prerequisites and qualify for a minimum number of points to attain the project ratings listed below. Having satisfied the basic prerequisites of the program, applicant projects are then rated according to their degree of compliance within the rating system.

LEED for Neighbourhood Development certifications are awarded according to the following scale:

Certified	40–49 points
Silver	50–59 points
Gold	60–79 points
Platinum	80 points and above

Stages of Certification

LEED for Neighbourhood Development involves projects that may have significantly longer construction periods than single buildings, and as a result the standard LEED certification process has been modified. To provide developers of certifiable projects with conditional approval at an early stage, LEED 2009 for Neighbourhood Development certification is divided into a three-stage process. A land-use entitlement, referred to below, is the existing or granted right to use property for specific types and quantities of residential and nonresidential land uses.

Stage 1. Conditional Approval of a LEED-ND Plan. This stage is optional for projects at any point before the entitlement process begins, or when no more than 50% of a project's total new and/or renovated building square footage (floor area) has land-use entitlements to use property for the specific types and quantities of residential and nonresidential land uses proposed, either by right or through a local government regulatory change process. Projects with more than 50% of new and/or renovated square footage (floor area) already entitled must complete the local entitlement process for 100% of new and/or renovated square footage (floor area) and apply under Stage 2. If conditional approval of the plan is achieved, a letter will be issued stating that if the project is built as proposed, it will be eligible to achieve LEED for Neighbourhood Development certification. The purpose of this letter is to help the developer build a case for entitlement among land-use planning authorities, as well as attract financing and occupant commitments.

Stage 2. Pre-Certified LEED-ND Plan. This stage is available after 100% of the project's total new and/or renovated building square footage (floor area) has been fully entitled by public authorities with jurisdiction over the project. The project can also be under construction or partially completed, but no more than 75% of the total square footage (floor area) can be constructed; projects that are more than 75% constructed must finish and use Stage 3. Any changes to the conditionally approved plan that could affect prerequisite or credit achievement must be communicated as part of this submission. If precertification of the plan is achieved, a certificate will be issued stating that the plan is a Pre-Certified LEED for Neighbourhood Development Plan and it will be listed as such on the USGBC website.

Stage 3. LEED-ND Certified Neighbourhood Development. This final step takes place when the project can submit documentation for all prerequisites and attempted credits, and when certificates of occupancy for buildings and acceptance of infrastructure have been issued by public authorities with jurisdiction over the project. Any changes so the Pre-Certified LEED-ND Plan that could affect prerequisite or credit achievement must be communicated as part of this submission. If certification of the completed neighbourhood development is achieved,

a plaque or similar award for public display at the project site will be issued and it will be listed as certified on the USGBC website.

Since the location of a project cannot be changed, whereas its design and technologies can, a review is offered to determine a project's compliance with the Smart Location and Linkage (SLL) prerequisites and inform the team whether the location qualifies. If it does, a project team can proceed; if it doesn't, the team can end its participation in the program before investing more time. This optional review of the SLL prerequisites is available to projects in advance of a Stage 1, Stage 2, or Stage 3 application.

IV. EXEMPLARY PERFORMANCE

Exemplary performance strategies result in performance that greatly exceeds the performance level or expands the scope required by an existing credit. To earn an exemplary performance point, teams must meet the performance level defined by the next step in the threshold progression. For a credit with more than one compliance path, an Innovation and Design Process point can be earned by satisfying more than one compliance path if their benefits are additive.

The credits for which exemplary performance points are available are listed in the LEED Reference Guide for Green Neighbourhood Development, 2009 Edition.

V. REGIONAL PRIORITY

To provide incentive to address geographically specific environmental issues, USGBC regional councils and chapters, the Congress for the New Urbanism chapters, and representatives of Smart Growth America's State and Local Caucus identified 6 credits per rating system that are of particular importance to specific areas. Each Regional Priority credit is worth an additional 1 point, and a total of 4 additional points may be earned by achieving Regional Priority credits, with 1 point earned per credit. If the project achieves more than 4 Regional Priority credits, the team can choose the credits for which these points will apply. The USGBC website contains a searchable database of Regional Priority credits.

Regional Priority Credits are not currently available in Canada. Canada has varying levels of chapter representation across the country for CaGBC, CNU, and Smart Growth organizations, such that geographical chapter representation is not currently sufficient to undertake a Regional Priority credit selection process comparable to that undertaken in the U.S.

SMART LOCATION AND LINKAGE

SLL Prerequisite 1: Smart Location

Required

Intent

To encourage development within and near *existing* communities and public transit infrastructure. To encourage improvement and redevelopment of existing cities, suburbs, and towns while limiting the expansion of the *development footprint* in the region to appropriate circumstances. To reduce vehicle trips and *vehicle miles traveled* (VMT) (*vehicle kilometres travelled* – VKT). To reduce the incidence of obesity, heart disease, and hypertension by encouraging daily physical activity associated with walking and bicycling.

Requirements

FOR ALL PROJECTS

Either (a) locate the *project* on a site served by existing *water* and *wastewater infrastructure* or (b) locate the project within a legally adopted, publicly owned, planned water and wastewater service area, and provide new water and wastewater infrastructure for the project.

AND

OPTION 1. Infill Sites

Locate the project on an *infill site*.

OR


OPTION 2. Adjacent Sites with Connectivity

Locate the project on an *adjacent site* (i.e., a site that is adjacent to *previously developed* land; see Definitions) where the *connectivity* of the site and adjacent land is at least 90 intersections per square mile (35 intersections per square kilometre) as measured within a 1/2 mile (800 metre) distance of a continuous segment of the *project boundary*, equal to or greater than 25% of the project boundary, that is adjacent to previous development. Existing external and internal intersections may be counted if they were not constructed or funded by the project *developer* within the past ten years. Locate and/or design the project such that a *through-street* and/or nonmotorized right-of-way intersects the project boundary at least every 600 feet (200 metres) on average, and at least every 800 feet (250 metres), connecting it with an existing street and/or right-of-way outside the project; nonmotorized rights-of-way may count for no more than 20% of the total. The exemptions listed in NPD Prerequisite 3, Connected and Open Community, do not apply to this option.

Figure 1. Adjacent and connected project site based on minimum 25% of perimeter adjacent to previously developed parcels and at least 90 eligible intersections per square mile within 1/2 mile (800 metres) of boundary segment adjacent to previous development.



Figure 2. Project site with through-street right-of-way intersecting project boundary at least every 600 feet (200 metres) on average.

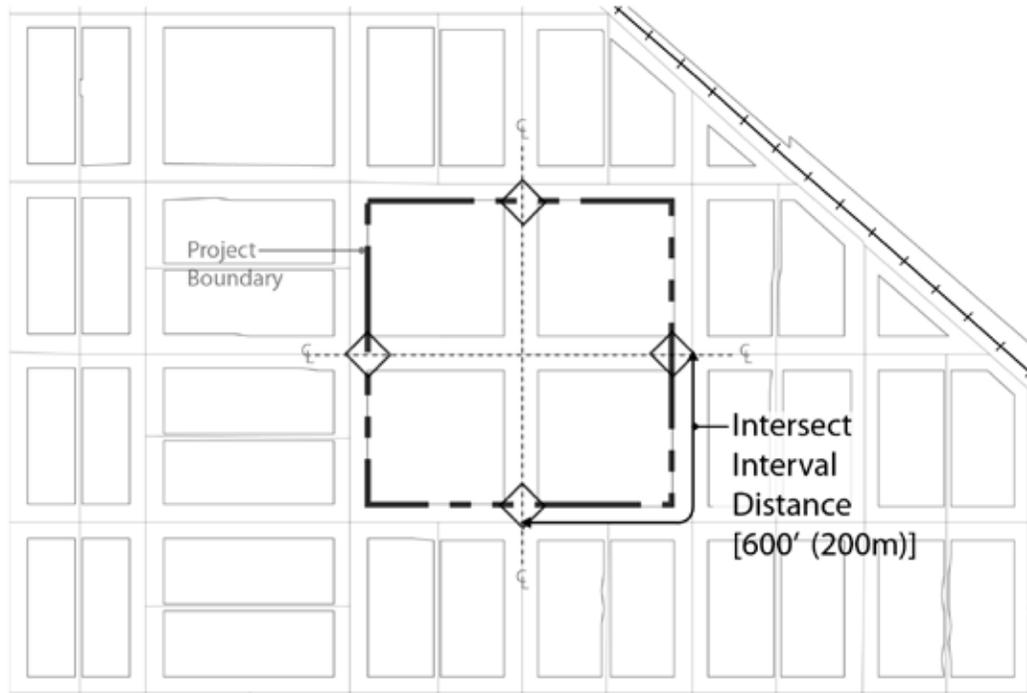

OR

OPTION 3. Transit Corridor or Route with Adequate Transit Service

Locate the project on a site with existing and/or planned transit service such that at least 50% of *dwelling units* and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) *walk distance* of bus and/or streetcar stops, or within a 1/2 mile (800 metre) walk distance of *bus rapid transit* stops, light or heavy rail stations, and/or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Table 1 (both weekday and weekend trip minimums must be met).

Weekend trips must include service on both Saturday and Sunday. Commuter rail must serve more than one *metropolitan statistical area* (MSA) and/or the area surrounding the core of an MSA.

Table 1. Minimum daily transit service

	Weekday trips	Weekend trips
Projects with multiple transit types (bus, streetcar, rail, or ferry)	60	40
Projects with commuter rail or ferry service only	24	6


If transit service is planned but not yet operational, the project must demonstrate one of the following:

- a. The relevant transit agency has a signed full funding grant agreement with the Federal Transit Administration that includes a revenue operations date for the start of transit service. The revenue operations date must be no later than the occupancy date of 50% of the project's total building square footage (floor area).
- b. For bus, streetcar, bus rapid transit, or ferry service, the transit agency must certify that it has an approved budget that includes specifically allocated funds sufficient to provide the planned service at the levels listed above and that service at these levels will commence no later than occupancy of 50% of the project's total building square footage (floor area).
- c. For rail service other than streetcars, the transit agency must certify that preliminary engineering for a rail line has commenced. In addition, the service must meet either of these two requirements:
 - A state legislature or local subdivision of the state has authorized the transit agency to expend funds to establish rail transit service that will commence no later than occupancy of 50% of the project's total building square footage (floor area).

OR

- A municipality has dedicated funding or reimbursement commitments from future tax revenue for the development of stations, platforms, or other rail transit infrastructure that will service the project no later than occupancy of 50% of the project's total building square footage (floor area).

Figure 3. Walking routes on pedestrian network showing distances from dwellings and nonresidential uses to transit stops

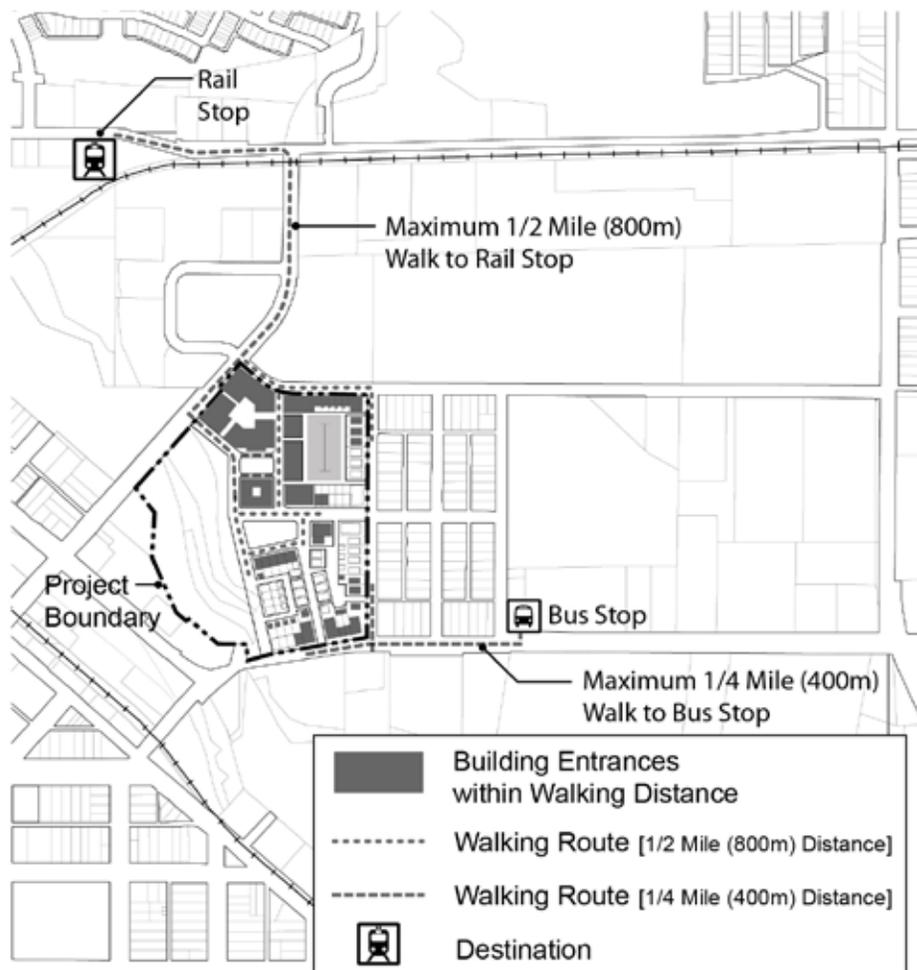

OR


OPTION 4. Sites with Nearby Neighbourhood Assets

Include a residential component equalling at least 30% of the project’s total building square footage (floor area) (exclusive of portions of parking structures devoted exclusively to parking), and locate the project near existing neighbourhood shops, services and facilities (“diverse uses”; see Appendix) such that the project boundary is within 1/4 mile (400 metre) walk distance of at least five diverse uses, or such that the project’s geographic centre is within 1/2 mile (800 metre) walk distance of at least seven diverse uses. In either case, the qualifying uses must include at least one food retail establishment and at least one use from each of two other categories, with the following limitations:

- a. A single establishment may not be counted in two categories (e.g., a place of worship may be counted only once even if it also contains a daycare facility, and a retail store may be counted only once even if it sells products in several categories).

- b. Establishments in a mixed-use building may each count if they are distinctly operated enterprises with separate exterior entrances, but no more than half of the minimum number of diverse uses can be situated in a single building or under a common roof.
- c. Only two establishments in a single category may be counted (e.g., if five restaurants are within the required distance, only two may be counted).

Figure 4. Walking routes on pedestrian network showing distances from dwellings and nonresidential uses to diverse use destinations

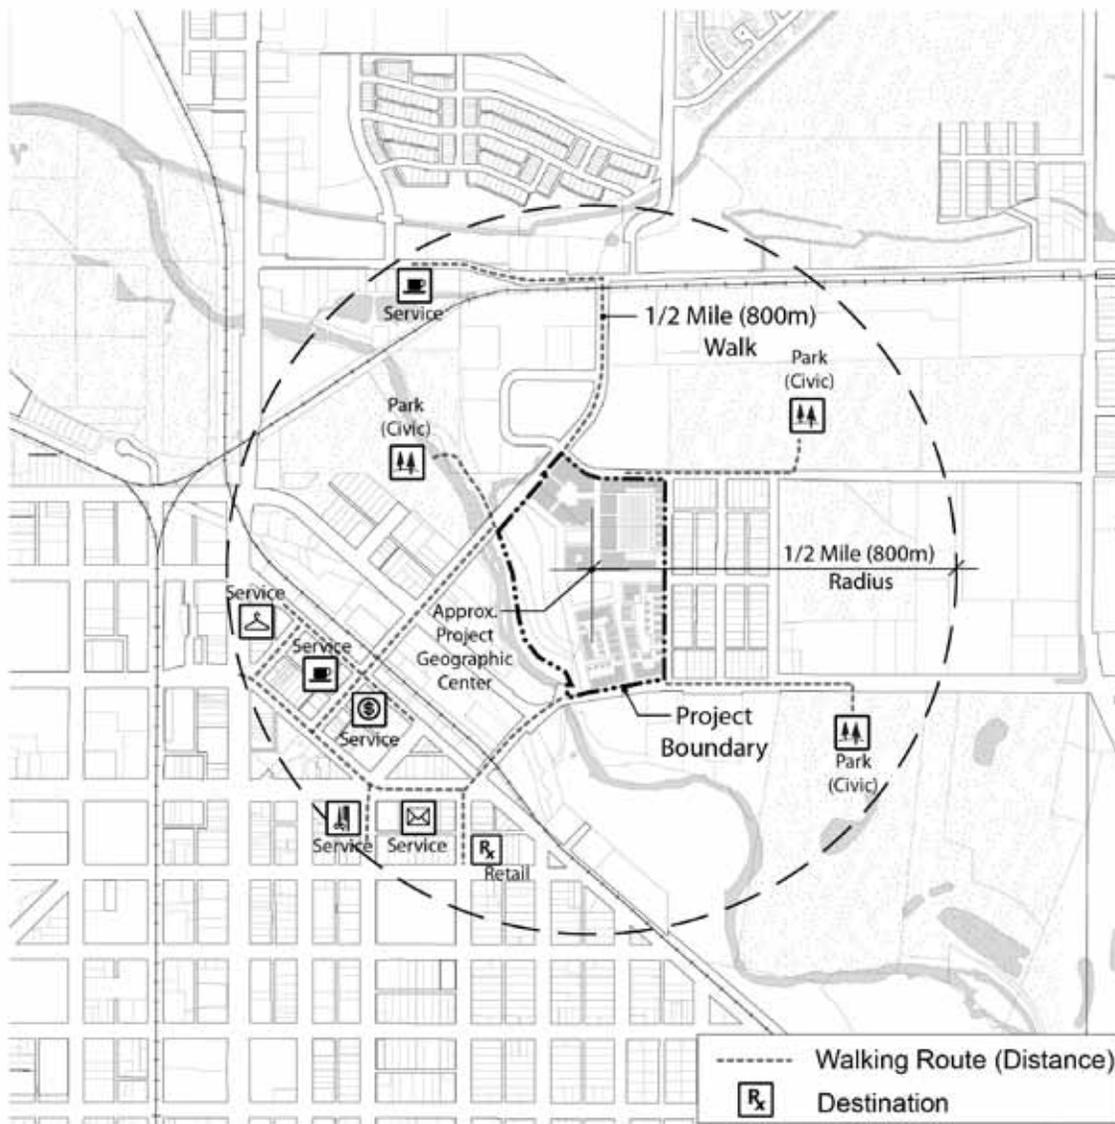

Key Definitions

adjacent site a site having at least 25% of its boundary bordering parcels that are each at least 75% *previously developed*. A *street* or other right-of-way does not constitute previously developed land; instead, it is the status of the property on the other side of the street or right-of-way that matters. Any fraction of the boundary that borders waterfront other than a stream is excluded from the calculation. A site is still considered adjacent if the 25% adjacent portion of its boundary is separated from previously developed parcels by undeveloped, permanently protected land averaging no more than 400 feet (120 metres) in width and no more than 500 feet (150 metres) in any one place. The undeveloped land must be permanently preserved as natural area, riparian corridor, *park*, greenway, agricultural land, or designated *cultural landscape*. Permanent pedestrian paths connecting the project through the protected parcels to the bordering site may be counted to meet the requirement of SLL Prerequisite 1, Option 2 (that the *project* be connected to the adjacent parcel by a through-street or nonmotorized right-of-way every 600 feet (200 metres) on average, provided the path or paths traverse the undeveloped land at no more than a 10% grade for walking by persons of all ages and physical abilities).

Adjacent project site based on minimum 25% of perimeter adjacent to previously developed parcels, including allowance for permanently protected land between project boundary and previously developed parcels.



connectivity the number of publicly accessible *street* intersections per square mile (kilometre), including intersections of streets with dedicated *alleys* and transit rights-of-way, and intersections of streets with nonmotorized rights-of-way. If one must both enter and exit an area through the same intersection, such an intersection and any intersections beyond that point are not counted; intersections leading only to *culs-de-sac* are also not counted. The calculation of square mileage excludes *water bodies*, parks larger than 1/2 acre (2020 square metres), public facility campuses, airports, rail yards, slopes over 15%, and areas nonbuildable under codified law or the rating system. Street rights-of-way may not be excluded.

infill site a site that meets any of the following four conditions:

- a. At least 75% of its boundary borders parcels that individually are at least 50% *previously developed*, and that in aggregate are at least 75% previously developed.
- b. The site, in combination with bordering parcels, forms an aggregate parcel whose boundary is 75% bounded by parcels that individually are at least 50% previously developed, and that in aggregate are at least 75% previously developed.
- c. At least 75% of the land area, exclusive of rights-of-way, within a 1/2 mile (800 metre) distance from the *project boundary* is previously developed.
- d. The lands within a 1/2 mile (800 metre) distance from the project boundary have a *preproject connectivity* of at least 140 intersections per square mile (54 intersections per square kilometre).

A *street* or other right-of-way does not constitute previously developed land; it is the status of property on the other side or right-of-way of the street that matters. For conditions (a) and (b) above, any fraction of the perimeter that borders waterfront other than a stream is excluded from the calculation.

(a). Infill project site based on minimum 75% of perimeter adjacent to previously developed parcels

(b). Infill project site based on minimum 75% adjacent to previously developed parcels using project boundary and selected bordering parcels



(c). Infill project site based on minimum 75% of land area within 1/2 mile (800 metres) of project boundary being previously developed



(d). Infill project site based on minimum 140 intersections/sq.mi. (54 intersections/sq.km) within 1/2 mile (800 metres) of project boundary



previously developed altered by paving, construction, and/or land use that would typically have required regulatory permitting to have been initiated (alterations may exist now or in the past). Previously developed land includes a platted lot on which a building was constructed if the lot is no more than 1 acre (4050 square metres); previous development on lots larger than 1 acre (4050 square metres) is defined as the *development footprint* and land alterations associated with the footprint. Land that is not previously developed and altered landscapes resulting from current or historical clearing or filling, agricultural or forestry use, or preserved natural area use are considered undeveloped land. The date of previous development permit issuance constitutes the date of previous development, but permit issuance in itself does not constitute previous development.

Canadian Alternative Compliance Path

FOR ALL PROJECTS

Either (a) locate the *project* on a site served by existing *water* and *wastewater infrastructure* or (b) locate the project within a legally adopted, publicly owned, planned water and wastewater service area, and provide new water and wastewater infrastructure for the project.

AND

OPTION 1. Infill sites

Locate the project on an *infill site*.

OR

OPTION 2. Adjacent Sites with Connectivity

Locate the project on an *adjacent site* (i.e., a site that is adjacent to previously developed land; see Definitions) where the *connectivity* of the site and adjacent land is at least 90 intersections per square mile (35 intersections per square kilometre) as measured within a 1/2 mile (800 metre) distance of a continuous segment of the *project boundary*, equal to or greater than 25% of the project boundary, that is adjacent to previous development. Existing external and internal intersections may be counted if they were not constructed or funded by the project *developer* within the past ten years. Locate and/or design the project such that a through-*street* and/or nonmotorized right-of-way intersects the project boundary at least every 600 feet (200 metres) on average, and at least every 800 feet (250 metres), connecting it with an existing street and/or right of way outside the project; nonmotorized rights-of-way may count for no more than 20% of the total. The exemptions listed in NPD Prerequisite 3, Connected and Open Community, do not apply to this option.

OR

OPTION 3. Transit Corridor or Route with Adequate Transit Service

Locate the project on a site with existing and/or planned transit service such that at least 50% of *dwelling units* and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) *walk distance* of bus and/or streetcar stops, or within a 1/2 mile (800 metre) walk distance of *bus rapid transit* stops, light or heavy rail stations, and/or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Table 1 (both weekday and weekend trip minimums must be met). Weekend trips must include service on both Saturday and Sunday.

Table 1. Minimum daily transit service

	Weekday trips	Weekend trips
Projects with multiple transit types (bus, streetcar, rail, or ferry)	60	40
Projects with commuter rail or ferry service only	24	6

If transit service is planned but not yet operational, the transit agency must certify that it has an approved budget that includes specifically allocated funds sufficient to provide the planned service at the levels listed above and that service at these levels will commence no later than occupancy of 50% of the project's total building square footage (floor area).

OR

OPTION 4. Sites with Nearby Neighbourhood Assets

Include a residential component equalling at least 30% of the project's total building square footage (floor area) (exclusive of portions of parking structures devoted exclusively to parking), and locate the project near existing neighbourhood shops, services, and facilities ("diverse uses"; see Appendix) such that the project boundary is within 1/4 mile (400 metre) walk distance of at least five diverse uses, or such that the project's geographic centre is within 1/2 mile (800 metre) walk distance of at least seven diverse uses. In either case the qualifying uses must include at least one food retail establishment and at least one use from each of two other categories, with the following limitations:

- a. A single establishment may not be counted in two categories (e.g., a place of worship may be counted only once even if it also contains a daycare facility, and a retail store may be counted only once even if it sells products in several categories).
- b. Establishments in a mixed-use building may each count if they are distinctly operated enterprises with separate exterior entrances, but no more than half of the minimum number of diverse uses can be situated in a single building or under a common roof.
- c. Only two establishments in a single category may be counted (e.g., if five restaurants are within the required distance, only two may be counted).

SLL Prerequisite 2: Imperilled Species and Ecological Communities Conservation Required

Intent

To conserve imperilled species and ecological communities.

Requirements

FOR ALL PROJECTS

Consult with the state Natural Heritage Program and state fish and wildlife agencies to determine whether species listed as threatened or endangered under the Federal Endangered Species Act the state's endangered species act, or species or ecological communities classified by NatureServe as GH (possibly extinct), G1 (critically imperilled), or G2 (imperilled) have been or are likely to be found on the *project* site because of the presence of suitable habitat and nearby occurrences. If the consultations are inconclusive and site conditions indicate that imperilled species or ecological communities could be present, using a qualified biologist, perform biological surveys using accepted methodologies during appropriate seasons to determine whether such species or communities occur or are likely to occur on the site.

OPTION 1. Sites without Affected Species or Ecological Community

The prerequisite is satisfied if the consultation and any necessary biological surveys determine that no such imperilled species or ecological communities have been found or have a high likelihood of occurring.

OR

OPTION 2. Sites with Affected Species or Ecological Community: Habitat Conservation Plan

Comply with an approved habitat conservation plan under the Endangered Species Act for each identified species or ecological community.

OR

OPTION 3. Sites with Affected Species or Ecological Community: Habitat Conservation Plan Equivalent

Work with a qualified biologist, a nongovernmental conservation organization, or the appropriate state, regional, or local agency to create and implement a conservation plan that includes the following actions:

- a. Identify and map the extent of the habitat and the appropriate buffer, not less than 100 feet (30 metres), according to best available scientific information.
- b. To the maximum extent practicable, protect the identified habitat and buffer in perpetuity by donating or selling the land or a conservation easement on the land to an accredited land trust or relevant public agency.
- c. If on-site protection can be accomplished, analyze threats from development and develop a monitoring and management plan that eliminates or significantly reduces the threats.
- d. If any portion of the identified habitat and buffer cannot be protected in perpetuity, quantify the effects by acres (hectares) or number of plants and/or animals affected, and protect from development in perpetuity habitat of similar or better quality, on-site or off-site, by donating or selling a conservation easement on it to an accredited land trust or relevant public agency. The donation or easement must cover an amount of land equal to or larger than the area that cannot be protected.

Canadian Alternative Compliance Path

FOR ALL PROJECTS

Consult with the provincial/territorial Conservation Data Centre, and provincial/territorial or federal fish and wildlife agencies to determine whether species listed under the federal Species at Risk Act (SARA) or under provincial/territorial endangered species legislation, or species or ecological communities classified by NatureServe as GH (possibly extinct), G1 (critically imperilled), or G2 (imperilled) have been or are likely to be found on the project site because of the presence of suitable habitat and nearby occurrences. If the consultations are inconclusive and site conditions indicate that imperilled species or ecological communities could be present, using a qualified biologist, perform biological surveys using accepted methodologies during appropriate seasons to determine whether such species or communities occur or are likely to occur on the site.

OPTION 1. Sites without Affected Species or Ecological Community

The prerequisite is satisfied if the consultation and any necessary biological surveys determine that no such imperilled species or ecological communities have been found or have a high likelihood of occurring.

OR

OPTION 2. Sites with Affected Species or Ecological Community: Recovery Strategy, Action Plan, or Management Plan

Comply with an approved recovery strategy, action plan, or management plan under federal, provincial/territorial endangered species legislation for each identified species or ecological community.

OR

OPTION 3. Sites with Affected Species or Ecological Community: Recovery Strategy, Action Plan, or Management Plan Equivalent

Work with the provincial/territorial Conservation Data Centre, a qualified biologist, a nongovernmental conservation organization, or the appropriate provincial/territorial, regional, or local agency to create and implement a conservation plan that includes the following actions:

- a. Identify and map the extent of the habitat and the appropriate buffer, not less than 100 feet (30 metres), according to best available scientific information.
- b. To the maximum extent practicable, protect the identified habitat and buffer in perpetuity by donating or selling the land or a conservation easement on the land to an accredited land trust or relevant public agency.
- c. If on-site protection can be accomplished, analyze threats from development and develop a monitoring and management plan that eliminates or significantly reduces the threats.
- d. If any portion of the identified habitat and buffer cannot be protected in perpetuity, quantify the effects by acres (hectares) or number of plants and/or animals affected, and protect from development in perpetuity habitat of similar or better quality, on-site or off-site, by donating or selling a conservation easement on it to an accredited land trust or relevant public agency. The donation or easement must cover an amount of land equal to or larger than the area that cannot be protected.

SLL Prerequisite 3: Wetland and Water Body Conservation

Required

Intent

To preserve water quality, natural hydrology, habitat, and biodiversity through conservation of *wetlands* and *water bodies*.

Requirements

Limit development effects on wetlands, water bodies and surrounding buffer land according to the requirements below.

OPTION 1. Sites with No Wetlands, Water Bodies, Land within 50 Feet (15 Metres) of Wetlands, or Land within 100 Feet (30 Metres) of Water Bodies

Locate the *project* on a site that includes no wetlands, no water bodies, no land within 50 feet (15 metres) of wetlands, and no land within 100 feet (30 metres) of water bodies.

OR

OPTION 2. Sites with Wetlands, Water Bodies, Land within 50 Feet (15 Metres) of Wetlands, or Land within 100 Feet (30 Metres) of Water Bodies

- a. Locate the *project* such that *preproject* wetlands, water bodies, land within 50 feet (15 metres) of wetlands, and land within 100 feet (30 metres) of water bodies is not affected by new development, unless the development is minor improvements or is on *previously developed* land.

OR

- b. Earn at least 1 point under GIB Credit 8, Storm Water Management, and limit any impacts beyond minor improvements to less than the percentage of buffer land listed in Table 1.

Table 1. Maximum allowable area of impacts within buffer zone, by density

Residential density (DU/hectare)*	Residential density (DU/acre)*	Nonresidential density (FAR)*	Percentage of buffer land** where impacts beyond minor improvements are allowed
> 62	> 25	> 1.75	≤ 20%
> 44 and ≤ 62	> 18 and ≤ 25	> 1.25 to ≤ 1.75	≤ 15%
> 25 and ≤ 44	> 10 and ≤ 18	> .75 to ≤ 1.25	≤ 10%
≤ 25	≤ 10	≤ .75	≤ 5%

DU = dwelling unit; FAR = floor-area ratio.

* For this option, a mixed-use project may use either its residential or its nonresidential *density* to determine the percentage of allowable impacts, regardless of which is higher.

** For this option, buffer width may vary as long as the total buffer area is equal to the area within 50 feet (15 metres) of wetlands and/or within 100 feet (30 metres) of water bodies, minus excluded features (see below). The minimum buffer width, however, is 25 feet (7.6 metres) for wetlands and 50 feet (15 metres) for water bodies, measured from the edge. In the minimum buffer, only minor improvements and/or improvements that result in no ecological impairment of the wetland or water body, as determined by a qualified biologist, are allowed.

AND

FOR ALL PROJECTS

Comply with all local, state (provincial/territorial), and federal regulations pertaining to wetland and water body conservation.

The following features are not considered wetlands, water bodies, or buffer land that must be protected for the purposes of this prerequisite:

- a. Previously developed land.
- b. Man-made water bodies (such as industrial mining pits, concrete-lined canals, or storm water retention ponds) that lack natural edges and floors or native ecological communities in the water and along the edge.
- c. Man-made linear wetlands that result from the interruption of natural drainages by *existing* rights-of-way.
- d. Wetlands that were man-made incidentally and have been rated “poor” for all measured wetland functions. Wetland quality assessment must be performed by a qualified biologist using a method that is accepted by state (provincial/territorial), or regional permitting agencies.

Minor improvements within the buffer may be undertaken to enhance appreciation for the wetland or water body, provided such facilities are open to public access. Only the following improvements are permitted:

- a. Bicycle and pedestrian pathways no more than 12 feet (3.7 metres) wide, of which no more than 8 feet (2.4 metres) may be impervious.
- b. Activities to maintain or restore native natural communities and/or natural hydrology.
- c. One single-story structure not exceeding 500 square feet (46 square metres) per 300 linear feet (90 linear metres) of buffer, on average.
- d. Grade changes necessary to ensure public access.
- e. Clearings, limited to one per 300 linear feet (90 linear metres) of buffer on average, not exceeding 500 square feet (46 square metres) each, for tables, benches, and access for nonmotorized recreational watercraft. Off-street parking is not considered a minor improvement.
- f. Removal of hazardous trees; up to 75% of dead trees; trees less than 6 inches (150 millimetres) diameter at breast height; trees under 40% condition rating; and up to 20% of trees more than 6 inches (150 millimetres) diameter at breast height with a condition rating of 40% or higher. The condition rating must be based on an assessment by an arborist certified by the International Society of Arboriculture (ISA) using ISA standard measures.
- g. *Brownfield* remediation activities.

Direct impacts to wetlands and water bodies are prohibited, except for minimal impact structures, such as an elevated boardwalk, that allow access to the water for educational and recreational purposes. Structures that protrude into wetlands or water bodies may be replaced, provided the replacement structure has the same or smaller footprint and a similar height.

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

previously developed altered by paving, construction, and/or land use that would typically have required regulatory permitting to have been initiated (alterations may exist now or in the past). Previously developed land includes a platted lot on which a building was constructed if the lot is no more than 1 acre (4050 square metres); previous development on lots larger than 1 acre (4050 square metres) is defined as the *development footprint* and land alterations associated with the footprint. Land that is not previously developed and altered landscapes resulting from current or historical clearing or filling, agricultural or forestry use, or preserved natural area use are considered undeveloped land. The date of previous development permit issuance constitutes the date of previous development, but permit issuance in itself does not constitute previous development.

SLL Prerequisite 4: Agricultural Land Conservation

Required

Intent

To preserve irreplaceable agricultural resources by protecting prime and unique soils on farmland and forestland from development.

Requirements

FOR ALL PROJECTS

Locate the *project* on a site that is not within a state or locally designated agricultural preservation district, unless any changes made to the site conform to the requirements for development within the district (as used in this requirement, district does not equate to land-use zoning).

AND

OPTION 1. Protected Soils Not Impacted

Locate the project *development footprint* such that it does not disturb *prime soils*, *unique soils*, or soils of state significance as identified in a state Natural Resources Conservation Service soil survey.

OR

OPTION 2. Infill Sites

Locate the project on an *infill site*.

OR

OPTION 3. Sites Served by Transit

Comply with SLL Prerequisite 1, Option 3, Transit Corridor or Route with Adequate Transit Service.

OR

OPTION 4. Development Rights Receiving Area

Locate the project within a designated receiving area for development rights under a publicly administered farmland protection program that provides for the transfer of development rights from lands designated for conservation to lands designated for development.

OR

OPTION 5. Sites with Impacted Soils

If development footprint affects land with prime soils, unique soils, or soils of state significance, as identified in a state Natural Resources Conservation Service soil survey, mitigate the loss through the purchase of easements providing permanent protection from development on land with comparable soils in accordance with the ratios based on densities per acre of *buildable land* as listed in Tables 1 and 2.

Table 1. Mitigation ratios for projects in metropolitan or micropolitan statistical areas, pop. 250,000 or more

Residential density (DU per hectare of buildable land available for residential use)	Residential density (DU per acre of buildable land available for residential use)	Nonresidential density (FAR of buildable land available for nonresidential use)	Mitigation ratio (acres [hectares] of easement: acres [hectares] of project on prime, unique, or significant soil)
> 17 and ≤ 21	> 7 and ≤ 8.5	> 0.50 and ≤ 0.67	2 to 1
> 21 and ≤ 25	> 8.5 and ≤ 10	> 0.67 and ≤ 0.75	1.5 to 1
> 25 and ≤ 28	> 10 and ≤ 11.5	> 0.75 and ≤ 0.87	1 to 1
> 28 and ≤ 32	> 11.5 and ≤ 13	> 0.87 and ≤ 1.0	.5 to 1
> 32	> 13	> 1.0	No mitigation

Table 2. Mitigation ratios for projects in metropolitan or micropolitan statistical areas, pop. less than 250,000

Residential density (DU per hectare of buildable land available for residential use)	Residential density (DU/acre of buildable land available for residential use)	Nonresidential density (FAR of buildable land available for nonresidential use)	Mitigation ratio (acres [hectares] of easement: acres [hectares] of project on prime, unique, or significant soil)
> 17 and ≤ 20	> 7 and ≤ 8	> 0.50 and ≤ 0.58	2 to 1
> 20 and ≤ 22	> 8 and ≤ 9	> 0.58 and ≤ 0.67	1 to 1
> 22 and ≤ 25	> 9 and ≤ 10	> 0.67 and ≤ 0.75	0.5 to 1
> 25	> 10	> 0.75	No mitigation

DU = dwelling unit; FAR = floor-area ratio.

All off-site mitigation must be located within 100 miles (160 kilometres) of the project.

Up to 15% of the impacted soils area may be exempted from the *density* requirements if it is permanently dedicated for community gardens, and may also count toward the mitigation requirement for the remainder of the site. Portions of parking structures devoted exclusively to parking must be excluded from the numerator when calculating the *floor area ratio* (FAR).

The mitigation ratio for a mixed-use project is calculated as follows:

- a. Determine the total square footage (metres) of all residential and nonresidential uses.
- b. Calculate the percentage residential and percentage nonresidential of the total square footage (metres).
- c. Determine the density of the residential and nonresidential components as measured in *dwelling units* per acre (hectare) and FAR, respectively.
- d. Referring to Tables 1 and 2, find the appropriate mitigation ratios for the residential and nonresidential components.

-
- e. If the mitigation ratios are different, multiply the mitigation ratio of the residential component by its percentage of the total square footage (metres), and multiply the mitigation ratio of the nonresidential component by its percentage.
 - f. Add the two numbers produced by Step 5. The result is the mitigation ratio.

Key Definitions

buildable land the portion of the site where construction can occur, including land voluntarily set aside and not constructed upon. When used in *density* calculations, buildable land excludes public rights-of-way and land excluded from development by codified law or LEED for Neighbourhood Development prerequisites. An *applicant* may exclude additional land not exceeding 15% of the buildable land base defined above, provided the following conditions are present:

- a. The land is protected from residential and nonresidential construction by easement, deed restriction, or other enforceable legal instrument.

AND

- b. Either 25% or more of the boundary of each contiguous parcel proposed for exclusion borders a *water body* or areas outside the *project boundary* that are protected by codified law; or ownership of, or management authority over, the exclusion area is transferred to a public entity.

infill site a site that meets any of the following four conditions:

- a. At least 75% of its boundary borders parcels that individually are at least 50% *previously developed*, and that in aggregate are at least 75% previously developed.
- b. The site, in combination with bordering parcels, forms an aggregate parcel whose boundary is 75% bounded by parcels that individually are at least 50% previously developed, and that in aggregate are at least 75% previously developed.
- c. At least 75% of the land area, exclusive of rights-of-way, within a 1/2 mile (800 metre) distance from the *project boundary* is previously developed.
- d. The lands within a 1/2 mile (800 metre) distance from the project boundary have a *preproject connectivity* of at least 140 intersections per square mile (54 intersections per square kilometre).

A *street* or other right-of-way does not constitute previously developed land; it is the status of property on the other side or right-of-way of the street that matters. For conditions (a) and (b) above, any fraction of the perimeter that borders waterfront other than a stream is excluded from the calculation.

(a). Infill project site based on minimum 75% of perimeter adjacent to previously developed parcels



(b). Infill project site based on minimum 75% adjacent to previously developed parcels using project boundary and selected bordering parcels



(c). Infill project site based on minimum 75% of land area within 1/2 mile (800 metres) of project boundary being previously developed



(d). Infill project site based on minimum 140 intersections/sq.mi. (54 intersections/sq.km) within 1/2 mile (800 metres) of project boundary



Canadian Alternative Compliance Path

FOR ALL PROJECTS

Locate the *project* on a site that is not within a provincial, territorial, or locally designated agricultural preservation district, agricultural land reserve, or farmland protection program, unless any changes made to the site conform to the requirements for development within the district (as used in this requirement, district does not equate to land-use zoning).

AND

OPTION 1. Sites without Affected Soils

Locate the project *development footprint* such that it does not disturb *prime farmland*. *Prime farmland* includes Class 1, 2 and 3 lands as defined by the Canada Land Inventory for rural Canada. Previously developed land is not considered prime farmland.

OR

OPTION 2. Infill Sites

Locate the project on an *infill site*.

OR

OPTION 3. Sites Served by Transit

Comply with SLL Prerequisite 1, Option 3, Transit Corridor or Route with Adequate Transit Service.

OR

OPTION 4. Development Rights Receiving Area

Locate the project within a designated receiving area for development rights under a publicly administered farmland protection program that provides for the transfer of development rights from lands designated for conservation to lands designated for development.

OR

OPTION 5. Sites with Impacted Soils

If development footprint affects land with *prime farmland*, mitigate the loss through the purchase of easements providing permanent protection from development on land with comparable soils in accordance with the ratios based on densities per acre of buildable land as listed in Tables 1 and 2.

Table 1. Mitigation ratios for projects in census metropolitan areas or census agglomerations with pop. 250,000 or more.

Residential density (DU per hectare of buildable land available for residential use)	Residential density (DU per acre of buildable land available for residential use)	Nonresidential density (FAR of buildable land available for nonresidential use)	Mitigation ratio (acres [hectares] of easement: acres [hectares] of project on prime farmland)
> 17 and ≤ 21	> 7 and ≤ 8.5	> 0.50 and ≤ 0.67	2 to 1
> 21 and ≤ 25	> 8.5 and ≤ 10	> 0.67 and ≤ 0.75	1.5 to 1
> 25 and ≤ 28	> 10 and ≤ 11.5	> 0.75 and ≤ 0.87	1 to 1
> 28 and ≤ 32	> 11.5 and ≤ 13	> 0.87 and ≤ 1.0	.5 to 1
> 32	> 13	> 1.0	No mitigation

Table 2. Mitigation ratios for projects in census metropolitan areas or census agglomerations with pop. less than 250,000.

Residential density (DU per hectare of buildable land available for residential use)	Residential density (DU per acre of buildable land available for residential use)	Nonresidential density (FAR of buildable land available for nonresidential use)	Mitigation ratio (acres [hectares] of easement: acres [hectares] of project on prime farmland)
> 17 and ≤ 20	> 7 and ≤ 8	> 0.50 and ≤ 0.58	2 to 1
> 20 and ≤ 22	> 8 and ≤ 9	> 0.58 and ≤ 0.67	1 to 1
> 22 and ≤ 25	> 9 and ≤ 10	> 0.67 and ≤ 0.75	0.5 to 1
> 25	> 10	> 0.75	No mitigation

DU = dwelling unit; FAR = floor-area ratio.

All off-site mitigation must be located within 100 miles (160 kilometres) of the project.

Up to 15% of the impacted soils area may be exempted from the *density* requirements if it is permanently dedicated for community gardens, and may also count toward the mitigation requirement for the remainder of the site. Portions of parking structures devoted exclusively to parking must be excluded from the numerator when calculating the *floor area ratio* (FAR).

The mitigation ratio for a mixed-use project is calculated as follows:

- a. Determine the total square footage (metres) of all residential and nonresidential uses.
- b. Calculate the percentage residential and percentage nonresidential of the total square footage (metres).
- c. Determine the density of the residential and nonresidential components as measured in *dwelling units* per acre (hectare) and FAR, respectively.
- d. Referring to Tables 1 and 2, find the appropriate mitigation ratios for the residential and nonresidential components.
- e. If the mitigation ratios are different, multiply the mitigation ratio of the residential component by its percentage of the total square footage (metres), and multiply the mitigation ratio of the nonresidential component by its percentage.
- f. Add the two numbers produced by Step 5. The result is the mitigation ratio.

SLL Prerequisite 5: Floodplain Avoidance

Required

Intent

To protect life and property, promote open space and habitat conservation, and enhance water quality and natural hydrological systems.

Requirement

OPTION 1. Sites without Floodplains

Locate on a site that does not contain any land within a 100-year high- or moderate-risk floodplain as defined and mapped by the Federal Emergency Management Agency (FEMA) or a state or local floodplain management agency, whichever is more recent.

OR

OPTION 2. Infill or Previously Developed Sites with Floodplains

Locate the *project* on an *infill site* or a *previously developed site* or in a non-conveyance area of river or coastal floodplain without storm surge potential where compensatory storage is used in accordance with a FEMA approved mitigation plan. Comply with the National Flood Insurance Program (NFIP) requirements for developing any portions of the site that lie within a 100-year high-or moderate-risk floodplain, as defined in Option 1. If the project includes construction of any critical facility, such as a hospital, water and sewage treatment facility, emergency centre, or fire or police station, the critical facility must be designed and built so as to be protected and operable during a 500-year event, as defined by FEMA.

OR

OPTION 3. All Other Sites with Floodplains

If any part of the site is located within a 100-year high or moderate-risk floodplain, as defined above, develop only on portions of the site that are not in the floodplain, or that have been previously developed, or that are in a non-conveyance area of river or coastal floodplain without storm surge potential where compensatory storage is used in accordance with a FEMA-approved mitigation plan. Previously developed portions in the floodplain must be developed according to NFIP requirements. If development includes construction of any critical facility, as described above, the critical facility must be designed and built so as to be protected and operable during a 500-year event, as defined by FEMA.

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

infill site a site that meets any of the following four conditions:

- At least 75% of its boundary borders parcels that individually are at least 50% *previously developed*, and that in aggregate are at least 75% previously developed.
- The site, in combination with bordering parcels, forms an aggregate parcel whose boundary is 75% bounded by parcels that individually are at least 50% previously developed, and that in aggregate are at least 75% previously developed.
- At least 75% of the land area, exclusive of rights-of-way, within a 1/2 mile (800 metre) distance from the *project boundary* is previously developed.
- The lands within a 1/2 mile (800 metre) distance from the project boundary have a *preproject connectivity* of at least 140 intersections per square mile (54 intersections per square kilometre).

A *street* or other right-of-way does not constitute previously developed land; it is the status of property on the other side or right-of-way of the street that matters. For conditions (a) and (b) above, any fraction of the perimeter that borders waterfront other than a stream is excluded from the calculation.

(a). Infill project site based on minimum 75% of perimeter adjacent to previously developed parcels



(b). Infill project site based on minimum 75% adjacent to previously developed parcels using project boundary and selected bordering parcels



(c). Infill project site based on minimum 75% of perimeter adjacent to previously developed parcels



(d). Infill project site based on minimum 75% adjacent to previously developed parcels using project boundary and selected bordering parcels



Canadian Alternative Compliance Path

OPTION 1. Sites without Floodplains

Locate on a site that does not contain any land within a regulatory floodplain as defined and mapped by the local floodplain management entity.

OR

OPTION 2. Infill or Previously Developed Sites with Floodplains

Locate the project on an *infill site* or a *previously developed site* approved by the local floodplain management entity. Comply with any flood proofing standards required by the local floodplain management entity.

OR

OPTION 3. All Other Sites with Floodplains

If any part of the site is located within the regulatory floodplain, as defined above, develop only on portions of the site that are not in the regulatory floodplain, or that have been previously developed and approved by the local floodplain management entity. Previously developed portions in the floodplain must be developed according to the local floodplain management entity requirements.

SLL Credit 1: Preferred Locations

1–10 points

Intent

To encourage development within *existing* cities, suburbs, and towns to reduce adverse environmental and public health effects associated with sprawl. To reduce development pressure beyond the limits of existing development. To conserve natural and financial resources required for construction and maintenance of infrastructure.

Requirements

Achieve any combination of requirements in the following three options:

OPTION 1. Location Type

Locate the *project* in one of the following locations:

- a. A *previously developed site* that is not an *adjacent site* or *infill site* (1 point).
- b. An adjacent site that is also a previously developed site (2 points).
- c. An infill site that is not a previously developed site (3 points).
- d. An infill site that is also a previously developed site (5 points).

AND/OR

OPTION 2. Connectivity

Locate the project in an area that has existing *connectivity* within 1/2 mile (800 metres) of the *project boundary*, as listed to Table 1.

Table 1. Points for connectivity within 1/2 mile (800 metres) of project

Intersections per square kilometre	Intersections per square mile	Points
≥ 77 and < 97	≥ 200 and < 250	1
≥ 97 and < 116	≥ 250 and < 300	2
≥ 116 and < 135	≥ 300 and < 350	3
≥ 135 and < 154	≥ 350 and < 400	4
≥ 154	≥ 400	5

Intersections within the site may be counted if the intersections were not constructed or funded by the *developer* within the past ten years.

AND/OR

OPTION 3. Designated High-Priority Locations

Achieve the following (3 points):

- Earn at least 2 points under NPD Credit 4, Mixed-Income Diverse Communities, Option 2, Affordable Housing.

-
- In addition, locate the project in one of the following high-priority redevelopment areas: EPA National Priorities List, Federal Empowerment Zone, Federal Enterprise Community, Federal Renewal Community, Department of Justice Weed and Seed Strategy Community, Department of the Treasury Community Development Financial Institutions Fund Qualified Low-Income Community (a subset of the New Markets Tax Credit Program), or the U.S. Department of Housing and Urban Development's Qualified Census Tract (QCT) or Difficult Development Area (DDA).

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

adjacent site a site having at least 25% of its boundary bordering parcels that are each at least 75% *previously developed*. A *street* or other right-of-way does not constitute previously developed land; instead, it is the status of the property on the other side of the street or right-of-way that matters. Any fraction of the boundary that borders waterfront other than a stream is excluded from the calculation. A site is still considered adjacent if the 25% adjacent portion of its boundary is separated from previously developed parcels by undeveloped, permanently protected land averaging no more than 400 feet (120 metres) in width and no more than 500 feet (150 metres) in any one place. The undeveloped land must be permanently preserved as natural area, riparian corridor, *park*, greenway, agricultural land, or designated *cultural landscape*. Permanent pedestrian paths connecting the project through the protected parcels to the bordering site may be counted to meet the requirement of SLL Prerequisite 1, Option 2 (that the *project* be connected to the adjacent parcel by a through-street or nonmotorized right-of-way every 600 feet (200 metres) on average, provided the path or paths traverse the undeveloped land at no more than a 10% grade for walking by persons of all ages and physical abilities).

Adjacent project site based on minimum 25% of perimeter adjacent to previously developed parcels, including allowance for permanently protected land between project boundary and previously developed parcels



connectivity the number of publicly accessible *street* intersections per square mile, including intersections of streets with dedicated *alleys* and transit rights-of-way, and intersections of streets with nonmotorized rights-of-way. If one must both enter and exit an area through the same intersection, such an intersection and any intersections beyond that point are not counted; intersections leading only to *culs-de-sac* are also not counted. The calculation of square mileage excludes *water bodies*, *parks* larger than 1/2 acre (2020 square metres), public facility campuses, airports, rail yards, slopes over 15%, and areas nonbuildable under codified law or the rating system. Street rights-of-way may not be excluded.

infill site a site that meets any of the following four conditions:

- a. At least 75% of its boundary borders parcels that individually are at least 50% *previously developed*, and that in aggregate are at least 75% previously developed.
- b. The site, in combination with bordering parcels, forms an aggregate parcel whose boundary is 75% bounded by parcels that individually are at least 50% previously developed, and that in aggregate are at least 75% previously developed.
- c. At least 75% of the land area, exclusive of rights-of-way, within a 1/2 mile (800 metre) distance from the *project boundary* is previously developed.
- d. The lands within a 1/2 mile (800 metre) distance from the project boundary have a *preproject connectivity* of at least 140 intersections per square mile (54 intersections per square kilometre).

A *street* or other right-of-way does not constitute previously developed land; it is the status of property on the other side or right-of-way of the street that matters. For conditions (a) and (b) above, any fraction of the perimeter that borders waterfront other than a stream is excluded from the calculation.

(a). Infill project site based on minimum 75% of perimeter adjacent to previously developed parcels



(b). Infill project site based on minimum 75% adjacent to previously developed parcels using project boundary and selected bordering parcels



(c). Infill project site based on minimum 75% of land area within 1/2 mile (800 metres) of project boundary being previously developed



(d). Infill project site based on minimum 140 intersections/sq.mi. (54 intersections/sq.km) within 1/2 mile (800 metres) of project boundary



Canadian Alternative Compliance Path

OPTION 1. Location Type

Locate the *project* in one of the following locations:

- a. A *previously developed site* that is not an *adjacent site* or *infill site* (1 point).
- b. An *adjacent site* that is also a *previously developed site* (2 points).
- c. An *infill site* that is not a *previously developed site* (3 points).
- d. An *infill site* that is also a *previously developed site* (5 points).

AND/OR

OPTION 2. Connectivity

Locate the project in an area that has existing *connectivity* within 1/2 mile (800 metres) of the *project boundary*, as listed to Table 1.

Table 1. Points for connectivity within 1/2 mile (800 metres) of project

Intersections per square kilometre	Intersections per square mile	Points
≥ 77 and < 97	≥ 200 and < 250	1
≥ 97 and < 116	≥ 250 and < 300	2
≥ 116 and < 135	≥ 300 and < 350	3
≥ 135 and < 154	≥ 350 and < 400	4
≥ 154	≥ 400	5

Intersections within the site may be counted if the intersections were not constructed or funded by the *developer* within the past ten years.

AND/OR

OPTION 3. Designated High-Priority Locations

Achieve the following (3 points):

- Earn at least 2 points under NPD Credit 4, Mixed-Income Diverse Communities, Option 2, Affordable Housing.
- In addition, locate the project in a high-priority redevelopment area, designated as such via criteria equivalent to one of the following US federal programs: EPA National Priorities List, Federal Empowerment Zone, Federal Enterprise Community, Federal Renewal Community, Department of Justice Weed and Seed Strategy Community, Department of the Treasury Community Development Financial Institutions Fund Qualified Low-Income Community (a subset of the New Markets Tax Credit Program), or the U.S. Department of Housing and Urban Development's Qualified Census Tract (QCT) or Difficult Development Area (DDA).

SLL Credit 2: Brownfields Redevelopment

1–2 points

Intent

To encourage the reuse of land by developing sites that are complicated by environmental contamination, thereby reducing pressure on undeveloped land.

Requirements

OPTION 1. Brownfield Sites (1 point)

Locate the *project* on a site, part or all of which is documented as contaminated (by means of an ASTM E1903-97 Phase II Environmental Site Assessment or a local Voluntary Clean-up Program), or on a site defined as a *brownfield* by a local, state, or federal government agency; and remediate site contamination such that the controlling public authority approves the protective measures and/or clean-up as effective, safe, and appropriate for the future use of the site.

OR

OPTION 2. High-Priority Redevelopment Areas (2 points)

Achieve the requirements in Option 1;

AND

Locate the project in one of the following high-priority redevelopment areas: EPA National Priorities List, Federal Empowerment Zone, Federal Enterprise Community, Federal Renewal Community, Department of Justice Weed and Seed Strategy Community, Department of the Treasury Community Development Financial Institutions Fund Qualified Low-Income Community (a subset of the New Markets Tax Credit Program), or the U.S. Department of Housing and Urban Development's Qualified Census Tract (QCT) or Difficult Development Area (DDA).

Canadian Alternative Compliance Path

OPTION 1. Brownfield Sites (1 point)

Locate the *project* on a site, part or all of which is defined as a *brownfield* or *contaminated site* by the appropriate local, provincial or federal government agency (or where allowed by your jurisdiction, documented as contaminated by an independent environmental assessment firm). Provide remediation as defined and required by the relevant regulatory agency.

OR

OPTION 2. High-Priority Redevelopment Areas (2 points)

Achieve the requirements in Option 1;

AND

In addition, locate the project in a high-priority redevelopment area, designated as such via criteria equivalent to one of the following US federal programs:

EPA National Priorities List, Federal Empowerment Zone, Federal Enterprise Community, Federal Renewal Community, Department of Justice Weed and Seed Strategy Community, Department of the Treasury Community Development Financial Institutions Fund Qualified Low-Income Community (a subset of the New Markets Tax Credit Program), or the U.S. Department of Housing and Urban Development's Qualified Census Tract (QCT) or Difficult Development Area (DDA).

SLL Credit 3: Locations with Reduced Automobile Dependence

1–7 points

Intent

To encourage development in locations shown to have multimodal transportation choices or otherwise reduced motor vehicle use, thereby reducing greenhouse gas emissions, air pollution, and other adverse environmental and public health effects associated with motor vehicle use.

Requirements

OPTION 1. Transit-Served Location

Locate the *project* on a site with existing transit service such that at least 50% of *dwelling units* and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) *walk distance* of bus or streetcar stops, or within a 1/2 mile (800 metre) walk distance of *bus rapid transit* stops, light or heavy rail stations, or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Tables 1 and 2. Both weekday and weekend trip minimums must be met to earn points at a particular threshold.

Projects larger than 125 acres (50 hectares) can meet the requirements by locating on a site with existing transit service such that at least 40% of dwelling units and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) walk distance of bus or streetcar stops, or within a 1/2 mile (800 metre) walk distance of bus rapid transit stops, light or heavy rail stations, or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Tables 1 and 2 (both weekday and weekend trip minimums must be met to earn points at a particular threshold), as long as the 40% complies with NPD Prerequisite 2 and any portion of the project beyond the 1/4 mile (400 metre) and/or 1/2 mile (800 metre) walk distances meets SLL Prerequisite 1, Option 3 - compliant planned transit service.

Projects greater than 500 acres (200 hectares) can meet the requirements by locating on a site with existing transit service such that at least 30% of dwelling units and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) walk distance of bus or streetcar stops, or within a 1/2 mile (800 metre) distance of bus rapid transit stops, light or heavy rail stations, or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Tables 1 and 2 (both weekday and weekend trip minimums must be met to earn points at a particular threshold), as long as the 30% complies with NPD Prerequisite 2 and any portion of the project beyond the 1/4 mile (400 metre) and/or 1/2 mile (800 metre) walk distances meets SLL Prerequisite 1, Option 3-compliant planned transit service.

For all projects, weekend daily trips must include service on both Saturday and Sunday. Commuter rail must serve more than one *metropolitan statistical area* (MSA) and/or the area surrounding the core of an MSA.

Table 1. Minimum daily transit service for projects with multiple transit types (bus, streetcar, rail, or ferry)

Weekday trips	Weekend trips	Points
60	40	1
76	50	2
100	65	3
132	85	4
180	130	5
246	150	6
320	200	7

Table 2. Minimum daily transit service for projects with commuter rail or ferry service only

Weekday trips	Weekend trips	Points
24	6	1
40	8	2
60	12	3

Projects served by two or more transit routes such that no one route provides more than 60% of the prescribed levels may earn 1 bonus point, up to the maximum 7 points.

Projects where existing transit service is temporarily rerouted outside the required distances for less than 2 years may meet the requirements if the local transit agency has committed to restoring the compliant routes with service at or above the prior level.

OR

OPTION 2. Metropolitan Planning Organization Location with Low VMT (VKT)

Locate the project within a region served by a metropolitan planning organization (MPO) and within a transportation analysis zone (TAZ) where either a) the current annual home-based vehicle miles traveled (VMT) (*vehicle kilometres travelled* – VKT) per capita (if TAZ is 100% residential) or b) the annual non-home-based VMT per employee (if TAZ is 100% nonresidential) does not exceed 90% of the average of the equivalent metropolitan region value. The research must be derived from household or employment transportation surveys conducted by the MPO within ten years of the date of submission for LEED for Neighbourhood Development certification. Additional credit may be awarded for increasing levels of performance, as indicated in Table 3. Mixed-use TAZs must use whichever TAZ VMT is greater, either residential per capita or nonresidential per employee.

Table 3. Points for low-VMT (VKT) location

Percentage of average regional VMT (VKT) per capita	Points
81–90%	1
71–80%	2
61–70%	3
51–60%	4
41–50%	5
31–40%	6
30 or less	7
VMT = vehicle miles traveled. VKT = vehicle kilometres traveled	

Points earned under Options 1 and 2 may not be combined.

Canadian Alternative Compliance Path

OPTION 1. Transit-Served Location

Locate the *project* on a site with *existing* transit service such that at least 50% of *dwelling units* and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) *walk distance* of bus or streetcar stops, or within a 1/2 mile (800 metre) walk distance of *bus rapid transit stops*, light or heavy rail stations, or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Tables 1 and 2. Both weekday and weekend trip minimums must be met to earn points at a particular threshold.

Projects larger than 125 acres (50 hectares) can meet the requirements by locating on a site with existing transit service such that at least 40% of dwelling units and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) walk distance of bus or streetcar stops, or within a 1/2 mile (800 metre) walk distance of bus rapid transit stops, light or heavy rail stations, or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Tables 1 and 2 (both weekday and weekend trip minimums must be met to earn points at a particular threshold), as long as the 40% complies with NPD Prerequisite 2 and any portion of the project beyond the 1/4 mile (400 metre) and/or 1/2 mile (800 metre) walk distances meets SLL Prerequisite 1, Option 3-compliant planned transit service.

Projects greater than 500 acres (200 hectares) can meet the requirements by locating on a site with existing transit service such that at least 30% of dwelling units and nonresidential building entrances (inclusive of existing buildings) are within a 1/4 mile (400 metre) walk distance of bus or streetcar stops, or within a 1/2 mile (800 metre) walk distance of bus rapid transit stops, light or heavy rail stations, or ferry terminals, and the transit service at those stops in aggregate meets the minimums listed in Tables 1 and 2 (both weekday and weekend trip minimums must be met to earn points at a particular threshold), as long as the 30% complies with NPD Prerequisite 2 and any portion of the project beyond the 1/4 mile (400 metre) and/or 1/2 mile (800 metre) walk distances meets SLL Prerequisite 1, Option 3-compliant planned transit service. For all projects, weekend trips must include service on both Saturday and Sunday.

Table 1. Minimum daily transit service for projects with multiple transit types (bus, streetcar, rail, or ferry)

Weekday trips	Weekend trips	Points
60	40	1
76	50	2
100	65	3
132	85	4
180	130	5
246	150	6
320	200	7

Table 2. Minimum daily transit service for projects with commuter rail or ferry service only

Weekday trips	Weekend trips	Points
24	6	1
40	8	2
60	12	3

Projects served by two or more transit routes such that no one route provides more than 60% of the prescribed levels may earn 1 bonus point, up to the maximum 7 points.

Projects where existing transit service is temporarily rerouted outside the required distances for less than 2 years may meet the requirements if the local transit agency has committed to restoring the compliant routes with service at or above the prior level.

OR

OPTION 2. Dissemination Areas with Low Automobile Mode Split or low VKT

Locate the project within a Statistics Canada *dissemination area* (DA) where the current home-based automobile mode split is less than 90% of the average of the *census metropolitan area* (CMA) or *census agglomeration* (CA), or where the current annual home-based *vehicle kilometres traveled* (VKT) per capita does not exceed 90% of the average of the CMA or CA. For DAs with no residential population, use the automobile mode split from the “Place of Work” census Target Group Profile instead of the “Place of Residence” Profile. Data used in this calculation must be derived from the most recent available census information.

OR

Demonstrate through a transportation survey and peer reviewed analysis that the current home-based automobile mode split or the current annual home-based *vehicle kilometres traveled* (VKT) per capita for the project will be less than 90% of the average of the CMA or CA as a whole.

Additional credit may be awarded for increasing levels of performance, as indicated in Table 3.

Table 3. Points for low automobile mode split or low VKT location

Percentage of average CMA/CA automobile mode split or low VKT per capita	Points
81–90%	1
71–80%	2
61–70%	3
51–60%	4
41–50%	5
31–40%	6
30 or less	7
VKT = vehicle kilometres traveled	

Points earned under Options 1 and 2 may not be combined.

SLL Credit 4: Bicycle Network and Storage

1 point

Intent

To promote bicycling and transportation efficiency, including reduced *vehicle miles traveled* (VMT) (*vehicle kilometres travelled* – VKT). To support public health by encouraging utilitarian and recreational physical activity.

Requirements

BICYCLE NETWORK

Design and/or locate the *project* to meet at least one of the three requirements below:

- a. An *existing bicycle network* of at least 5 continuous miles (8 continuous kilometres) in length is within 1/4 mile (400 metre) bicycling distance of the *project boundary*.
- b. If the project is 100% residential, an existing bicycle network begins within 1/4 mile (400 metre) bicycling distance of the project boundary and connects to a *school* or *employment centre* within 3 miles (5 kilometres)' bicycling distance.
- c. An existing bicycle network within 1/4 mile (400 metre) bicycling distance of the project boundary connects to at least ten diverse uses (see Appendix) within 3 miles (5 kilometres)' bicycling distance from the project boundary.

AND

BICYCLE STORAGE

Provide bicycle parking and storage capacity to new buildings as follows:

- a. **Multiunit residential.** Provide at least one secure, enclosed bicycle storage space per occupant for 30% of the *planned occupancy* but no fewer than one per unit. Provide secure visitor bicycle racks on-sites with at least one bicycle space per ten *dwelling units* but no fewer than four spaces per project site.
- b. **Retail.** Provide at least one secure, enclosed bicycle storage space per new retail worker for 10% of retail worker planned occupancy. Provide visitor or customer bicycle racks on-site, with at least one bicycle space per 5,000 square feet (465 square metres) of retail space, but no fewer than one bicycle space per business or four bicycle spaces per project site, whichever is greater. Provide at least one on-site shower with changing facility for any development with 100 or more new workers and at least one additional on-site shower with changing facility for every 150 new workers thereafter.
- c. **Nonresidential other than retail.** Provide at least one secure, enclosed bicycle storage space per new occupant for 10% of planned occupancy. Provide visitor bicycle racks on-site with at least one bicycle space per 10,000 square feet (930 square metres) of new commercial nonretail space but not fewer than four bicycle spaces per building. Provide at least one on-site shower with changing facility for any development with 100 or more new workers and at least one additional on-site shower with changing facility for every 150 new workers thereafter.

Secure, enclosed bicycle storage areas must be locked and easily accessible to residents and/or workers. Provide informational signage on using the storage facilities.

Visitors' and customers' bicycle racks must be clearly visible from a main entry, located within 100 feet (30 metres) of the door, served with night lighting, and protected from damage from nearby vehicles. If the building has multiple main entries, bicycle racks must be proportionally dispersed within 100 feet (30 metres) of each.

Shower and changing facility requirements may be met by providing the equivalent of free access to on-site health club shower facilities, if the health club can be accessed without going outside. Provide informational signage on using the shower facilities.

SLL Credit 5: Housing and Jobs Proximity

1–3 points

Intent

To encourage balanced communities with a diversity of uses and employment opportunities.

Requirements

OPTION 1. Project with Affordable Residential Component (3 points)

Include a residential component equalling at least 30% of the *project's* total building square footage (floor area) (exclusive of parking structures), and locate and/or design the project such that the geographic centre (or boundary if the project exceeds 500 acres [200 hectares]) is within 1/2 mile (800 metre) *walk distance* of existing full-time-equivalent jobs whose number is equal to or greater than the number of *dwelling units* in the project; and satisfy the requirements necessary to earn at least one point under NPD Credit 4, Mixed-Income Diverse Communities, Option 2, Affordable Housing.

OR

OPTION 2. Project With Residential Component (2 points)

Include a residential component equalling at least 30% of the project's total building square footage (floor area) (exclusive of parking structures), and locate and/or design the project such that the geographic centre (or boundary if the project exceeds 500 acres [200 hectares]) is within 1/2 mile (800 metre) walk distance of existing full-time-equivalent jobs whose number is equal to or greater than the number of dwelling units in the project.

OR

OPTION 3. Infill Project with Nonresidential Component (1 point)

Include a nonresidential component equalling at least 30% of the project's total building square footage (floor area) (exclusive of parking structures), and locate on an *infill site* whose geographic centre (or boundary if the project exceeds 500 acres [200 hectares]) is within 1/2 mile (800 metre) walk distance of an existing rail transit, ferry, or tram stop and within 1/2 mile (800 metre) walk distance of existing dwelling units whose number is equal to or greater than 50% of the number of new full-time equivalent jobs created as part of the project.

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

infill site a site that meets any of the following four conditions:

- At least 75% of its boundary borders parcels that individually are at least 50% *previously developed*, and that in aggregate are at least 75% previously developed.
- The site, in combination with bordering parcels, forms an aggregate parcel whose boundary is 75% bounded by parcels that individually are at least 50% previously developed, and that in aggregate are at least 75% previously developed.
- At least 75% of the land area, exclusive of rights-of-way, within a 1/2 mile (800 metre) distance from the *project boundary* is previously developed.
- The lands within a 1/2 mile (800 metre) distance from the project boundary have a *preproject connectivity* of at least 140 intersections per square mile (54 intersections per square kilometre).

A *street* or other right-of-way does not constitute previously developed land; it is the status of property on the other side or right-of-way of the street that matters. For conditions (a) and (b) above, any fraction of the perimeter that borders waterfront other than a stream is excluded from the calculation.

(a). Infill project site based on minimum 75% of perimeter adjacent to previously developed parcels



(b). Infill project site based on minimum 75% adjacent to previously developed parcels using project boundary and selected bordering parcels



(c). Infill project site based on minimum 75% of land area within 1/2 mile (800 metres) of project boundary being previously developed



(d). Infill project site based on minimum 140 intersections/sq.mi. (54 intersections/sq.km) within 1/2 mile (800 metres) of project boundary



SLL Credit 6: Steep Slope Protection

1 point

Intent

To minimize erosion to protect habitat and reduce stress on natural water systems by preserving steep slopes in a natural, vegetated state.

Requirements

FOR ALL PROJECTS

All options apply to *existing* natural or constructed slopes. Portions of *project sites* with slopes up to 20 feet (6 metres) in elevation, measured from toe (a distinct break between a 40% slope and lesser slopes) to top, that are more than 30 feet (9 metres) in any direction from another slope greater than 15% are exempt from the requirements, although more restrictive local regulations may apply.

OPTION 1. No Disturbance of Slopes Over 15%

Locate on a site that has no existing slopes greater than 15%, or avoid disturbing portions of the site that have existing slopes greater than 15%.

OR

OPTION 2. Previously Developed Sites with Slopes Over 15%

On portions of *previously developed* sites with existing slopes greater than 15%, restore the slope area with *native plants* or non-invasive *adapted plants* according to Table 1.

Table 1. Required restoration area of slope

Slope	Restoration
> 40%	100%
26% to 40%	60%
< 15% to 25%	40%

In addition, develop *covenants, conditions, and restrictions (CC&R)*; development agreements; or other binding documents that will protect the specified steep slope areas in perpetuity. Comply with the requirements of Option 3 on any slope over 15% that has not been previously developed.

OR

OPTION 3. Sites Other Than Previously Developed Sites with Slopes Over 15%

On sites that are not previously developed, protect existing slopes over 15% as follows:

- a. Do not disturb slopes greater than 40% and do not disturb portions of the project site within 50 feet (15 metres) horizontally of the top of the slope and 75 feet (23 metres) horizontally from the toe of the slope.

-
- b. Limit development to no more than 40% of slopes between 25% and 40% and to no more than 60% of slopes between 15% and 25%
 - c. Locate development such that the percentage of the *development footprint* that is on existing slopes less than 15% is greater than the percentage of *buildable land* that has existing slopes less than 15%.
 - d. Develop CC&R, development agreements, or other binding documents that will protect steep slopes in perpetuity.

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

buildable land the portion of the site where construction can occur, including land voluntarily set aside and not constructed upon. When used in *density* calculations, buildable land excludes public rights-of-way and land excluded from development by codified law or LEED for Neighbourhood Development prerequisites. An *applicant* may exclude additional land not exceeding 15% of the buildable land base defined above, provided the following conditions are present:

- a. The land is protected from residential and nonresidential construction by easement, deed restriction, or other enforceable legal instrument.

AND

- b. Either 25% or more of the boundary of each contiguous parcel proposed for exclusion borders a *water body* or areas outside the *project boundary* that are protected by codified law; or ownership of, or management authority over, the exclusion area is transferred to a public entity.

SLL Credit 7: Site Design for Habitat or Wetland and Water Body Conservation

1 point

Intent

To conserve *native plants*, wildlife habitat, *wetlands*, and *water bodies*.

Requirements

OPTION 1. Sites without Significant Habitat or Wetlands and Water Bodies

Locate the *project* on a site that does not have significant habitat, as defined in Option 2 of this credit, or land within 100 feet (30 metres) of such habitat, and fulfill the requirements of Options 1 or 2(a) under SLL Prerequisite 3, Wetland and Water Body Conservation.

OR

OPTION 2. Sites with Significant Habitat

Work with both the state's Natural Heritage Program and the state fish and wildlife agency to delineate identified significant habitat on the site. Do not disturb significant habitat or portions of the site within an appropriate buffer around the habitat. The geographic extent of the habitat and buffer must be identified by a qualified biologist, a nongovernmental conservation organization, or the appropriate state or regional agency. Protect significant habitat and its identified buffers from development in perpetuity by donating or selling the land, or a conservation easement on the land, to an accredited land trust or relevant public agency (a deed covenant is not sufficient to meet this requirement). Identify and commit to ongoing management activities, along with parties responsible for management and funding available, so that habitat is maintained in *preproject* condition or better for a minimum of three years after the project is built out. The requirement for identifying ongoing management activities may also be met by earning SLL Credit 9, Long-Term Conservation Management of Wetlands and Water Bodies.

Significant habitat for this credit includes the following:

- a. Habitat for species that are listed or are candidates for listing under state or federal endangered species acts, habitat for species of special concern in the state, and/or habitat for those species and/or ecological communities classified as GH, G1, G2, G3, and/or S1 and S2 species by NatureServe.
- b. Locally or regionally significant habitat of any size, or patches of predominantly native vegetation at least 150 acres (60 hectares) (even if some of the 150 acres [60 hectares] lies outside the *project boundary*).
- c. Habitat flagged for conservation under a regional or state conservation or green infrastructure plan.

OR

OPTION 3. Sites with Wetlands and Water Bodies

Design the project to conserve 100% of all water bodies, wetlands, land within 100 feet (30 metres) of water bodies, and land within 50 feet (15 metres) of wetlands on the site. Using a qualified biologist, conduct an assessment, or compile *existing* assessments, showing the extent to which those water bodies and/or wetlands perform the following functions: (1) water quality maintenance, (2) wildlife habitat protection, and (3) hydrologic function maintenance, including flood protection. Assign appropriate buffers (not less than 100 feet [30 metres] for water bodies and 50 feet [15 metres] for wetlands) based on the functions provided, contiguous soils and slopes, and contiguous land uses. Do not disturb wetlands, water bodies, and their buffers, and protect them from development in perpetuity by donating or selling the land, or a conservation easement on the land, to an accredited land trust or relevant public agency (a deed covenant is not sufficient to meet this requirement). Identify and commit to ongoing management activities, along with parties responsible for management and funding available, so that habitat is maintained in preproject condition or better for a minimum of three years after the project is built out. The requirement for identifying ongoing management activities may also be met by earning SLL Credit 9, Long-Term Conservation Management of Wetlands and Water Bodies. The project does not meet the requirements if it has negative effects on habitat for species identified in Option 2 (a).

FOR ALL PROJECTS

The following features are not considered wetlands, water bodies, or buffer land that must be protected:

- a. *Previously developed* land.
- b. Man-made water bodies (such as industrial mining pits, concrete-lined canals, or storm water retention ponds) that lack natural edges and floors or native ecological communities in the water and along the edge.
- c. Man-made linear wetlands that result from the interruption of natural drainages by existing rights-of-way.
- d. Wetlands that were created incidentally by human activity and have been rated “poor” for all measured wetland functions. Wetland quality assessment must be performed by a qualified biologist using a method that is accepted by state or regional permitting agencies.

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

previously developed altered by paving, construction, and/or land use that would typically have required regulatory permitting to have been initiated (alterations may exist now or in the past). Previously developed land includes a platted lot on which a building was constructed if the lot is no more than 1 acre (4050 square metres); previous development on lots larger than 1 acre (4050 square metres) is defined as the *development footprint* and land alterations associated with the footprint. Land that is not previously developed and altered landscapes resulting from current or historical clearing or filling, agricultural or forestry use, or preserved natural area use are considered undeveloped land. The date of previous development permit issuance constitutes the date of previous development, but permit issuance in itself does not constitute previous development.

Canadian Alternative Compliance Path

OPTION 1. Sites without Significant Habitat or Wetlands and Water Bodies

Locate the *project* on a site that does not have significant habitat, as defined in Option 2 of this credit, or land within 100 feet (30 metres) of such habitat, and fulfill the requirements of Options 1 or 2(a) under SLL Prerequisite 3, Wetland and Water Body Conservation.

OR

OPTION 2. Sites with Significant Habitat

Work with the provincial/territorial Conservation Data Centre, and provincial/territorial or federal fish and wildlife agencies to delineate identified significant habitat on the site. Do not disturb significant habitat or portions of the site within an appropriate buffer around the habitat. The geographic extent of the habitat and buffer must be identified by a qualified biologist, a nongovernmental conservation organization, or the appropriate provincial/territorial or federal agency. Protect significant habitat and its identified buffers from development in perpetuity by donating or selling the land, or a conservation easement on the land, to an accredited land trust or relevant public agency (a deed covenant is not sufficient to meet this requirement). Identify and commit to ongoing management activities, along with parties responsible for management and funding available, so that habitat is maintained in *preproject* condition or better for a minimum of three years after the project is built out. The requirement for identifying ongoing management activities may also be met by earning SLL Credit 9, Long-Term Conservation Management of Wetlands and Water Bodies.

Significant habitat for this credit includes the following:

- a. Habitat for species that are listed or are candidates for listing under the federal Species at Risk Act (SARA), or under provincial/territorial endangered species legislation, and/or habitat for species of special concern at a regional or local scale (as identified by an appropriate regional or local agency), and/or habitat for those species and/or ecological communities classified as GH, G1, G2, G3, and/or S1 and S2 species by NatureServe.
- b. Locally or regionally significant habitat of any size, or patches of predominantly native vegetation at least 150 acres (60 hectares) (even if some of the 150 acres [60 hectares] lies outside the *project boundary*).
- c. Habitat flagged for conservation under a provincial/territorial, regional, or municipal conservation or green infrastructure plan. This can include *Natural Heritage Systems* made up of both existing habitat and areas identified for habitat restoration.

OR

OPTION 3. Sites with Wetlands and Water Bodies

Design the project to conserve 100% of all water bodies, wetlands, land within 100 feet (30 metres) of water bodies, and land within 50 feet (15 metres) of wetlands on the site. Using a qualified biologist, conduct an assessment, or compile *existing* assessments, showing the extent to which those water bodies and/or wetlands perform the following functions: (1) water quality maintenance, (2) wildlife habitat protection, and (3) hydrologic function maintenance, including flood protection. Assign appropriate buffers (not less than 100 feet [30 metres] for water bodies and 50 feet [15 metres] for wetlands) based on the functions provided, contiguous soils and slopes, and contiguous land uses. Do not disturb wetlands, water bodies, and their buffers, and protect

them from development in perpetuity by donating or selling the land, or a conservation easement on the land, to an accredited land trust or relevant public agency (a deed covenant is not sufficient to meet this requirement). Identify and commit to ongoing management activities, along with parties responsible for management and funding available, so that habitat is maintained in pre-project condition or better for a minimum of three years after the project is built out. The requirement for identifying ongoing management activities may also be met by earning SLL Credit 9, Long-Term Conservation Management of Wetlands and Water Bodies. The project does not meet the requirements if it has negative effects on habitat for species identified in Option 2 (a).

FOR ALL PROJECTS

The following features are not considered wetlands, water bodies, or buffer land that must be protected:

- a. *Previously developed* land.
- b. Man-made water bodies (such as industrial mining pits, concrete-lined canals, or storm water retention ponds) that lack natural edges and floors or native ecological communities in the water and along the edge.
- c. Man-made linear wetlands that result from the interruption of natural drainages by existing rights-of-way.
- d. Wetlands that were created incidentally by human activity and have been rated “poor” for all measured wetland functions. Wetland quality assessment must be performed by a qualified biologist using a method that is accepted by regional, provincial/territorial, or federal permitting agencies.

SLL Credit 8: Restoration of Habitat or Wetlands and Water Bodies

1 point

Intent

To restore *native plants*, wildlife habitat, *wetlands*, and *water bodies* that have been harmed by previous human activities.

Requirements

Using only native plants, restore *predevelopment* native ecological communities, water bodies, or wetlands on the *project* site in an area equal to or greater than 10% of the *development footprint*. Work with a qualified biologist to ensure that restored areas will have the native species assemblages, hydrology, and other habitat characteristics that likely occurred in predevelopment conditions. Protect such areas from development in perpetuity by donating or selling the land, or a conservation easement on the land, to an accredited land trust or relevant public agency (a deed covenant is not sufficient to meet this requirement). Identify and commit to ongoing management activities, along with parties responsible for management and funding available, so that restored areas are maintained for a minimum of three years after the project is built out or the restoration is completed, whichever is later. The requirement for identifying ongoing management activities may also be met by earning SLL Credit 9, Long-Term Conservation Management of Wetlands and Water Bodies. The project does not meet the requirements if it has negative effects on habitat for species identified in Option 2 (a) of SLL Credit 7, Site Design for Habitat or Wetland and Water Body Conservation.

SLL Credit 9: Long-Term Conservation Management of Habitat or Wetlands and Water Bodies

1 point

Intent

To conserve *native plants*, wildlife habitat, *wetlands*, and *water bodies*.

Requirements

Create and commit to implementing a long-term (at least ten-year) management plan for new or *existing* onsite native habitats, water bodies, and/or wetlands and their buffers, and create a guaranteed funding source for management. Involve a qualified biologist or a professional from a natural resources agency or natural resources consulting firm in writing the management plan and conducting or evaluating the ongoing management. The plan must include biological objectives consistent with habitat and/or water resource conservation, and it must identify: (1) procedures, including personnel to carry them out, for maintaining the conservation areas; (2) estimated implementation costs and funding sources; and (3) threats that the *project* poses for habitat and/or water resources within conservation areas (e.g., introduction of exotic species, intrusion of residents in habitat areas) and measures to substantially reduce those threats. The project does not meet the requirements if it has negative effects on habitat for species identified in Option 2 (a) of SLL Credit 7, Site Design for Habitat or Wetland and Water Body Conservation.

NEIGHBOURHOOD PATTERN AND DESIGN

NPD Prerequisite 1: Walkable Streets

Required

Intent

To promote transportation efficiency, including reduced *vehicle miles traveled* (VMT) (*vehicle kilometres travelled* – VKT). To promote walking by providing safe, appealing, and comfortable street environments that support public health by reducing pedestrian injuries and encouraging daily physical activity.

Requirements

Design and build the *project* to achieve all of the following:

- a. For 90% of new building frontage, a principal *functional entry* on the front façade faces a public space, such as a street, square, *park*, *paseo* (*promenade*), or *plaza*, but not a parking lot, and is connected to sidewalks or equivalent provisions for walking. If the public space is a square, park, or plaza, it must be at least 50 feet (15 metres) deep, measured at a point perpendicular to each entry.
- b. At least 15% of *existing* and new street frontage within and bordering the project has a minimum building-height-to-street-width ratio of 1:3 (i.e., a minimum of 1 foot [metre] of building height for every 3 feet [metres] of street width).
 - Nonmotorized rights-of-way may be counted toward the 15% requirement, but 100% of such spaces must have a minimum building-height-to-street-width ratio of 1:1.
 - Projects with bordering street frontage must meet only their proportional share of the height-to-width ratio (i.e., only on the project side of the street).
 - Street frontage is measured in linear feet (metres).
 - Building height is measured to eaves or the top of the roof for a flat roof structure, and street width is measured façade to façade. For building frontages with multiple heights, use the weighted average height of all frontage segments based on each segment's height weighted by the segment's share of total building width.
 - *Alleys* and driveways are excluded.
- c. Continuous sidewalks or equivalent all-weather provisions for walking are provided along both sides of 90% of streets or frontage within the project, including the project side of streets bordering the project. New sidewalks, whether adjacent to streets or not, must be at least 8 feet (2.4 metres) wide on retail or mixed-use blocks and at least 4 feet (1.2 metres) wide on all other blocks. Equivalent provisions for walking include *woonerfs* and all-weather surface footpaths. Alleys, driveways, and reconstructed existing sidewalks are excluded from these calculations.
- d. No more than 20% of the street frontages within the project are faced directly by garage and service bay openings.

Projects in a designated *historic district* subject to review by a local historic preservation entity are exempt from (b), (c), and (d) if approval for compliance is not granted by the review body. Projects in historic districts listed in or eligible for listing in a state register or the National Register of Historic Places that are subject to review by a state historic preservation office or the National Park Service are exempt from (b), (c), and (d) if approval for compliance is not granted.

Canadian Alternative Compliance Path

Design and build the *project* to achieve all of the following:

- a. For 90% of new building frontage, a principal *functional entry* on the front façade faces a public space, such as a street, square, *park*, *paseo (promenade)*, or plaza, but not a parking lot, and is connected to sidewalks or equivalent provisions for walking. If the public space is a square, park, or plaza, it must be at least 50 feet (15 metres) deep, measured at a point perpendicular to each entry.
- b. At least 15% of *existing* and new street frontage within and bordering the project has a minimum building-height-to-street-width ratio of 1:3 (i.e., a minimum of 1 foot [metre] of building height for every 3 feet [metres] of street width).
 - Nonmotorized rights-of-way may be counted toward the 15% requirement, but 100% of such spaces must have a minimum building-height-to-street-width ratio of 1:1.
 - Projects with bordering street frontage must meet only their proportional share of the height-to-width ratio (i.e., only on the project side of the street).
 - Street frontage is measured in linear feet (metres).
 - Building height is measured to eaves or the top of the roof for a flat roof structure, and street width is measured façade to façade. For building frontages with multiple heights, use the weighted average height of all frontage segments based on each segment's height weighted by the segment's share of total building width.
 - *Alleys* and driveways are excluded.
- c. Continuous sidewalks or equivalent all-weather provisions for walking are provided along both sides of 90% of streets or frontage within the project, including the project side of streets bordering the project. New sidewalks, whether adjacent to streets or not, must be at least 8 feet (2.4 metres) wide on retail or mixed-use blocks and at least 4 feet (1.2 metres) wide on all other blocks. Equivalent provisions for walking include *woonerfs* and all-weather surface footpaths. Alleys, driveways, and reconstructed existing sidewalks are excluded from these calculations.
- d. No more than 20% of the street frontages within the project are faced directly by garage and service bay openings.

Projects in a locally, provincially/territorially or nationally recognized *heritage district* subject to review by a local, provincial/territorial or federal heritage conservation entity are exempt from (b), (c), and (d) if approval for compliance is not granted by the review body.

NPD Prerequisite 2: Compact Development

Required

Intent

To conserve land. To promote liveability, walkability, and transportation efficiency, including reduced *vehicle miles traveled* (VMT) (*vehicle kilometres travelled* – VKT). To leverage and support transit investments. To reduce public health risks by encouraging daily physical activity associated with walking and bicycling.

Requirements

OPTION 1. Projects in Transit Corridors

For *projects* with *existing* and/or planned transit service (i.e., service with the funding commitments specified in SLL Prerequisite 1, Smart Location) that meets or exceeds the 2-point threshold in SLL Credit 3, Locations with Reduced Automobile Dependence, Option 1, build at the following densities, based on the *walk distances* to the transit service specified in SLL Credit 3:

- a. For residential components located within the walk distances: 12 or more *dwelling units* per acre (30 dwelling units per hectare) of buildable land available for residential uses.
- b. For residential components falling outside the walk distances: 7 or more dwelling units per acre (17 dwelling units per hectare) of buildable land available for residential uses.
- c. For nonresidential components located within the walk distances: 0.80 *floor-area ratio* (FAR) or greater of buildable land available for nonresidential uses.
- d. Or nonresidential components falling outside the walk distances: 0.50 FAR or greater of buildable land available for nonresidential uses.

If the project location is served by a transit agency that has specified guidelines for minimum service densities that are greater than the densities required by this prerequisite, the project must achieve those service densities instead.

OR

OPTION 2. All Other Projects

Build any residential components of the project at a density of 7 dwelling units per acre (17 dwelling units per hectare) *buildable land* available for residential uses.

AND

Build any nonresidential components of the project at a density of 0.50 FAR or greater of buildable land available for nonresidential uses.

FOR ALL PROJECTS

Density calculations include all planned and existing buildings within the *project boundary*, excluding those portions of parking structures devoted exclusively to parking.

The specified density must be achieved within five years of the date that the first building of any type is occupied.

If one component of the project, residential or nonresidential, meets the minimum density requirement but the other component does not, include only the qualifying density. Use that component's dwelling units or nonresidential floor area in the numerator and the total buildable land area in the denominator. If the resulting density meets the minimum requirement, the prerequisite is achieved.

NPD Prerequisite 3: Connected and Open Community

Required

Intent

To promote *projects* that have high levels of internal *connectivity* and are well connected to the community at large. To encourage development within *existing* communities that promote transportation efficiency through multimodal transportation. To improve public health by encouraging daily physical activity.

Requirements


OPTION 1. Projects with Internal Streets

Design and build the project such that its internal connectivity is at least 140 intersections per square mile (54 intersections per square kilometre). All *streets* and sidewalks that are counted toward the connectivity requirement must be available for general public use and not gated. Gated areas are not considered available for public use, with the exception of education and health care campuses and military bases where gates are used for security purposes.

AND

Design and build the project with at least one through-street and/or nonmotorized right-of-way intersecting or terminating at the *project boundary* at least every 800 feet (240 metres), or at existing abutting street intervals and intersections, whichever is the shorter distance. Nonmotorized rights-of-way may count for no more than 20% of the total. This does not apply to portions of the boundary where connections cannot be made because of physical obstacles, such as prior platting of property, construction of existing buildings or other barriers, slopes over 15%, *wetlands* and *water bodies*, railroad and utility rights-of-way, existing limited-access motor vehicle rights-of-way, and parks and dedicated open space.

Figure 1. Project site design with 140 eligible intersections per square mile (54 intersections per square kilometre) on streets that are not gated

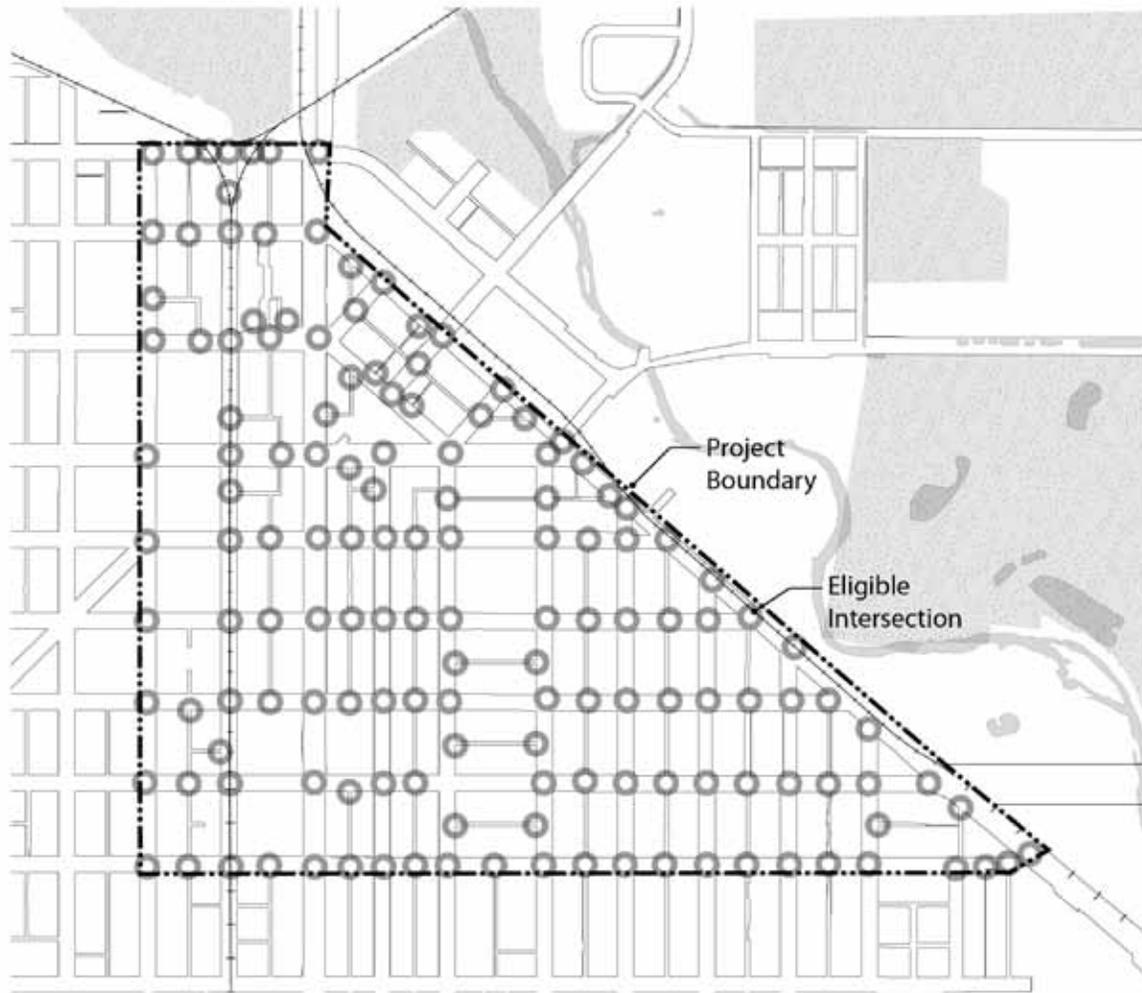

OR

OPTION 2. Projects without Internal Streets

Locate the project such that the connectivity of the existing streets within 1/4 mile (400 metres) of the project boundary is at least 90 intersections per square mile (35 intersections per square kilometre). All streets and sidewalks that are counted toward the connectivity requirement must be available for general public use and not gated. Gated areas are not considered available for public use, with the exception of education and health care campuses and military bases where gates are used for security purposes.

Figure 2. Project site with at least 90 eligible intersections per square mile (35 intersections per square kilometre) within 1/4 mile (400 metres) of project boundary



Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

connectivity the number of publicly accessible *street* intersections per square mile, including intersections of streets with dedicated *alleys* and transit rights-of-way, and intersections of streets with nonmotorized rights-of-way. If one must both enter and exit an area through the same intersection, such an intersection and any intersections beyond that point are not counted; intersections leading only to *culs-de-sac* are also not counted. The calculation of square mileage excludes *water bodies*, *parks* larger than 1/2 acre (2020 square metres), public facility campuses, airports, rail yards, slopes over 15%, and areas nonbuildable under codified law or the rating system. Street rights-of-way may not be excluded.

NPD Credit 1: Walkable Streets

1–12 points

Intent

To promote transportation efficiency, including reduced *vehicle miles traveled* (VMT) (*vehicle kilometres travelled* – VKT). To promote walking by providing safe, appealing, and comfortable street environments that support public health by reducing pedestrian injuries and encouraging daily physical activity.

Requirements

A *project* may earn a maximum of 12 points according to the schedule in Table 1:


Table 1. Points for walkable street features

Items achieved	Points
2–3	1
4–5	2
6–7	3
8–9	4
10	7
11	8
12	9
13	10
14	11
15–16	12

Façades and Entries


- a. At least 80% of the total linear feet (metres) of street-facing building façades in the project is no more than 25 feet (7.6 metres) from the property line.
- b. At least 50% of the total linear feet (metres) of street-facing building façades in the project is no more than 18 feet (5.5 metres) from the property line.

Figure 1. Minimal street-facing building façade setbacks

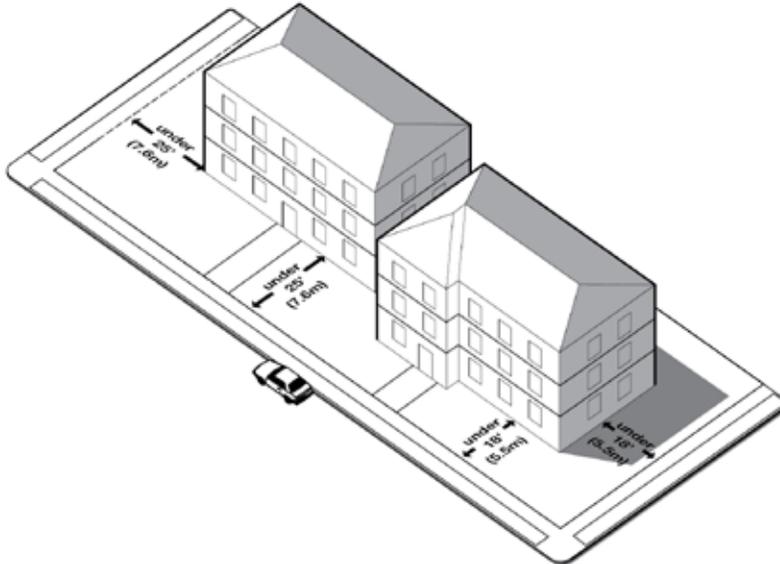

- c. At least 50% of the total linear feet (metres) of mixed-use and nonresidential street-facing building façades in the project is within 1 foot (.3 metres) of a sidewalk or equivalent provision for walking.
- d. *Functional entries* to the building occur at an average of 75 feet (23 metres) or less along nonresidential or mixed-use buildings or blocks.

Figure 2. Functional building entries at minimum average distances along blocks

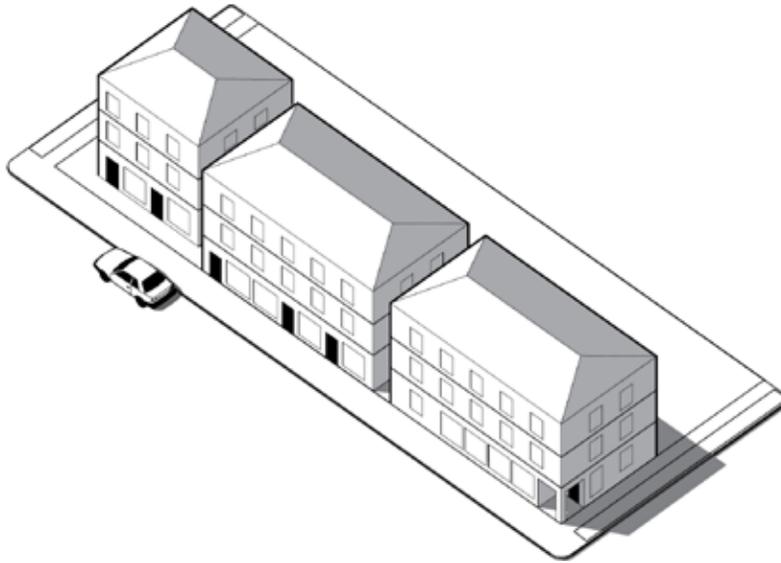

- e. Functional entries to the building occur at an average of 30 feet (9 metres) or less along nonresidential or mixed-use buildings or blocks (items d and e are cumulative).

Ground-Level Use and Parking


- f. All ground-level retail, service, and trade uses that face a public space have clear glass on at least 60% of their façades between 3 and 8 feet (1 and 2.4 metres) above grade.

Figure 3. Ground-level retail and service uses with minimum amounts of clear glass façades




- g. If a façade extends along a sidewalk, no more than 40% of its length or 50 feet (15 metres), whichever is less, is blank (without doors or windows).

Figure 4. Limits on length of blank walls along sidewalks

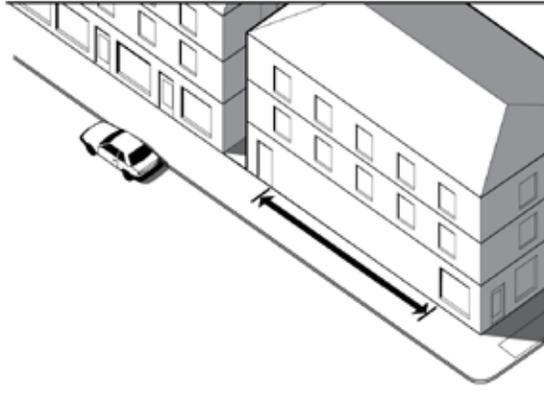


- h. Any ground-level retail, service, or trade windows must be kept visible (unshuttered) at night; this must be stipulated in *covenants, conditions, and restrictions (CC&R)* or other binding documents.
- i. On-street parking is provided on a minimum of 70% of both sides of all new and *existing* streets, including the project side of bordering streets. The percentage of on-street parking is calculated by dividing the length of street designated for parking by the total length of the curb along each street, including curb cuts, driveways, and intersection radii. Space within the parking lane that is occupied by corner bulb-outs (within 24 feet [7 metres] of an intersection), transit stops, and motorcycle or bicycle parking may be counted as designated for parking in this calculation. *Woonerfs* are not considered streets for this subsection.

Figure 5. On-street parking requirements

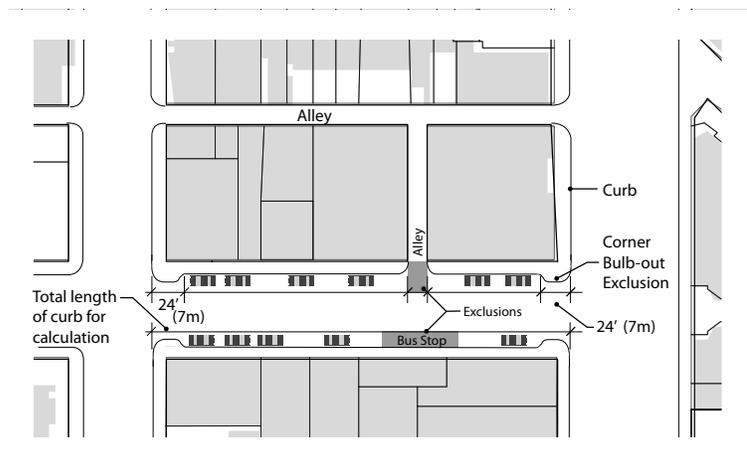

- j. Continuous sidewalks or equivalent provisions for walking are available along both sides of all streets within the project, including the project side of streets bordering the project. New sidewalks, whether adjacent to streets or not, must be at least 10 feet (3 metres) wide on retail or mixed-use blocks and at least 5 feet (1.5 metres) wide on all other blocks. Equivalent provisions for walking include woonerfs and all-weather-surface footpaths at least 5 feet (1.5 metres) wide. Note that these requirements specify wider sidewalks than required by NPD Prerequisite 1, Walkable Streets.
- k. If the project has ground-floor *dwelling units*, the principal floor of at least 50% of those units must have an elevated finished floor no less than 24 inches (610 millimetres) above the sidewalk grade. Below-grade basement spaces and/or *accessory dwelling units* are exempt from this requirement.

Figure 6. Minimal above-grade entrance requirements

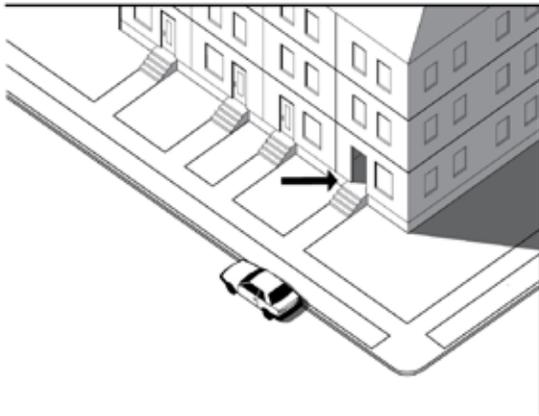

- l. In nonresidential or mixed-use projects, 50% or more of the total number of office buildings include ground-floor retail along 60% of the length of the street-level façade; 100% of mixed-use buildings include ground-floor retail, live-work spaces, and/or ground-floor dwelling units along at least 60% of the street-level façade; and all businesses and/or other community services on the ground floor are accessible directly from sidewalks along a public space, such as a street, square, paseo (promenade), or plaza, but not a parking lot.
- m. At least 40% of all street frontage within the project has a minimum building height-to-street-width ratio of 1:3 (i.e., a minimum of 1 foot [metre] of building height for every 3 feet [metres] of street width).
- Nonmotorized rights-of-way may be counted toward the 40% requirement, but 100% of such spaces must have a minimum 1:1 ratio of building height to street width.
 - Projects with bordering street frontage must meet only their proportional share of the height-to-width ratio (i.e., only on the project side of the street).
 - Street frontage is measured in linear feet (metres).
 - Building height is measured to eaves or the top of the roof for a flat-roof structure, and street width is measured façade to façade. For building frontages with multiple heights, use the weighted average height of all frontage segments based on each segment's share of total building width.
 - *Alleys* and driveways are excluded.

Design Speeds for Safe Pedestrian and Bicycle Travel

- n. 75% of new residential-only streets within the project are designed for a target speed of no more than 20 mph (32km/h).
- o. 70% of new nonresidential and/or mixed-use streets within the project are designed for a target speed of no more than 25 mph (40km/h). A multiway boulevard, with travel lanes separated from access lanes by medians, may apply this requirement to its outer access lanes only (through-lanes are exempt), provided pedestrian crosswalks are installed across the boulevard at intervals no greater than 800 feet.

Sidewalk Intrusions

- p. At grade crossings with driveways, account for no more than 10% of the length of sidewalks within the project.

NPD Credit 2: Compact Development

1–6 points

Intent

To encourage development in *existing* areas to conserve land and protect farmland and wildlife habitat. To promote liveability, walkability, and transportation efficiency, including reduced *vehicle miles traveled* (VMT) (*vehicle kilometres travelled* – VKT). To improve public health encouraging daily physical activity associated with alternative modes of transportation and compact development.

Requirement

Design and build the *project* such that residential and nonresidential components achieve the *densities* per acre (hectare) of *buildable land* listed in Table 1 (excluding those portions of parking structures devoted to parking).

Table 1. Points for density per acre (hectare) of buildable land

Residential density (DU/hectare)	Residential density (DU/acre)	Nonresidential density (FAR)	Points
> 25 and ≤ 32	> 10 and ≤ 13	> 0.75 and ≤ 1.0	1
> 32 and ≤ 45	> 13 and ≤ 18	> 1.0 and ≤ 1.25	2
> 45 and ≤ 62	> 18 and ≤ 25	> 1.25 and ≤ 1.75	3
> 62 and ≤ 94	> 25 and ≤ 38	> 1.75 and ≤ 2.25	4
> 94 and ≤ 156	> 38 and ≤ 63	> 2.25 and ≤ 3.0	5
> 156	> 63	> 3.0	6

DU = dwelling unit; FAR = floor-area ratio.

The specified densities must be achieved within five years of the date that the first building of any type is occupied..

The scoring of a mixed-use project is calculated with a weighted average, according to the following steps:

1. Determine the total square footage (metres) of all residential and nonresidential uses.
2. Calculate the percentage residential and percentage nonresidential of the total square footage (metres).
3. Determine the density of each component as measured in *dwelling units* per acre (hectare) and *floor-area ratio*, respectively.
4. Referring to Table 1, find the appropriate points for the densities of the residential and nonresidential components.
5. If the points are different, multiply the point value of the residential component by its percentage of the total square footage (metres) and multiply the point value of the nonresidential component by its percentage.
6. Add the two scores.

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

buildable land the portion of the site where construction can occur, including land voluntarily set aside and not constructed upon. When used in *density* calculations, buildable land excludes public rights-of-way and land excluded from development by codified law or LEED for Neighbourhood Development prerequisites. An applicant may exclude additional land not exceeding 15% of the buildable land base defined above, provided the following conditions are present:

- a. The land is protected from residential and nonresidential construction by easement, deed restriction, or other enforceable legal instrument.

AND

- b. Either 25% or more of the boundary of each contiguous parcel proposed for exclusion borders a *water body* or areas outside the *project boundary* that are protected by codified law; or ownership of, or management authority over, the exclusion area is transferred to a public entity.

NPD Credit 3: Mixed-Use Neighbourhood Centres

1–4 points

Intent

To cluster diverse land uses in accessible neighbourhood and regional centres to encourage daily walking, biking, and transit use, reduce *vehicle miles traveled* (VMT) (*vehicle kilometres travelled* – VKT) and automobile dependence, and support car-free living.

Requirements

FOR ALL PROJECTS

Locate and/or design the *project* such that 50% of its *dwelling units* are within a 1/4 mile (400 metre) *walk distance* of the number of diverse uses (see Appendix) in Table 1, including at least one use from each of the four categories. For projects with no dwellings, 50% of dwelling units within 1/4 mile (400 metre) of the *project boundary* must be within a 1/4 mile (400 metre) walk distance of the number of diverse uses specified in Table 1, including at least one food retail store and at least one establishment from each of two other categories. Establishments may be inside or outside the project and may be *existing* or *planned diverse uses*.

The specified number of diverse uses must be in place by the time of occupancy according to the percentages indicated in Table 1 (exclusive of portions of parking structures devoted to parking):

Table 1. Points for diverse uses within 1/4 mile (400 metre) walk distance, by time of occupancy

Diverse uses	Percentage occupancy of total square footage	Points
4–6	20%	1
7–10	30%	2
11–18	40%	3
≥ 19	50%	4

Per neighbourhood centre, the following restrictions apply:

- A single establishment may not be counted in two categories or as two types of diverse use (e.g., a place of worship may be counted only once even if it also contains a daycare facility, and a retail store may be counted only once even if it sells products in several categories).
- Establishments in a mixed-use building may each count if they are distinctly operated enterprises with separate exterior entrances, but no more than half of the minimum number of diverse uses can be situated in a single building or under a common roof.
- Only two establishments of a single type may be counted (e.g., if five restaurants are within the required distance, only two may be counted).

FOR PROJECTS 40 ACRES (16 HECTARES) OR GREATER

Cluster diverse uses into neighbourhood centres as follows:

Table 2. Points for clustering of diverse uses

Diverse uses	Minimum uses per neighbourhood centre	Points
4–6	3	1
7–10	5	2
11–18	7	3
≥ 19	9	4

Within each neighbourhood centre, the principal entries of the establishments must be within a 300 foot (90 metre) walk distance from a single common point that represents the centre of the cluster (1 or 2 points) or within a 400 foot (120 metre) walk distance (3 or 4 points).

Also, projects with multiple centres must determine points earned based on the number of uses in the centres weighted by the percentage of total dwelling units within a 1/4 mile (400 metre) walk distance from each centre's common point.

AND

FOR PROJECTS WITH REGIONAL-SERVING RETAIL OF 150,000 (13,940) OR MORE SQUARE FEET (METRES)

Projects with retail uses totalling 150,000 or more square feet (13,940 or more square metres), if they have at least one retail establishment totalling 75,000 or more square feet (6970 or more square metres), must also earn a minimum of 1 point under SLL Credit 3, Reduced Automobile Dependence, Option 1, Transit-Served Location (planned transit service can be counted), and for every additional 50,000 square feet (4650 square metres) of retail above 150,000 square feet (13,940 square metres), must earn 1 additional point under SLL Credit 3..

If transit service is planned but not yet operational, the project must demonstrate one of the following:

- a. The relevant transit agency has a signed full funding grant agreement with the Federal Transit Administration that includes a revenue operations date for the start of transit service. The revenue operations date must be no later than the occupancy date of 50% of the project's total building square footage.
- b. For bus, streetcar, bus rapid transit, or ferry service, the transit agency must certify that it has an approved budget that includes specifically allocated funds sufficient to provide the planned service at the levels listed above and that service at these levels will commence no later than occupancy of 50% of the project's total building square footage (floor area).
- c. For rail service other than streetcars, the transit agency must certify that preliminary engineering for a rail line has commenced. In addition, the service must meet either of these two requirements:
 - A state legislature or local subdivision of the state has authorized the transit agency to expend funds to establish rail transit service that will commence no later than occupancy of 50% of the project's total building square footage.

OR

- A municipality has dedicated funding or reimbursement commitments from future tax revenue for the development of stations, platforms, or other rail transit infrastructure that will service the project no later than occupancy of 50% of the project's total building square footage.

Canadian Alternative Compliance Path

FOR ALL PROJECTS

Locate and/or design the project such that 50% of its *dwelling units* are within a 1/4 mile (400 metre) *walk distance* of the number of diverse uses (see Appendix) in Table 1, including at least one use from each of the four categories. For projects with no dwellings, 50% of dwelling units within 1/4 mile (400 metre) of the *project boundary* must be within a 1/4 mile (400 metre) *walk distance* of the number of diverse uses specified in Table 1, including at least one food retail store and at least one establishment from each of two other categories. Establishments may be inside or outside the project and may be *existing* or *planned diverse uses*.

The specified number of diverse uses must be in place by the time of occupancy according to the percentages indicated in Table 1 (exclusive of portions of parking structures devoted to parking):

Table 1. Points for diverse uses within 1/4 mile (400 metre) walk distance, by time of occupancy

Diverse uses	Percentage occupancy of total square footage	Points
4–6	20%	1
7–10	30%	2
11–18	40%	3
≥ 19	50%	4

Per neighbourhood centre, the following restrictions apply:

- A single establishment may not be counted in two categories or as two types of diverse use (e.g., a place of worship may be counted only once even if it also contains a daycare facility, and a retail store may be counted only once even if it sells products in several categories).
- Establishments in a mixed-use building may each count if they are distinctly operated enterprises with separate exterior entrances, but no more than half of the minimum number of diverse uses can be situated in a single building or under a common roof.
- Only two establishments of a single type may be counted (e.g., if five restaurants are within the required distance, only two may be counted).

FOR PROJECTS 40 ACRES (16 HECTARES) OR GREATER

Cluster diverse uses into neighbourhood centres as follows:

Table 2. Points for clustering of diverse uses

Diverse uses	Minimum uses per neighbourhood centre	Points
4–6	3	1
7–10	5	2
11–18	7	3
≥ 19	9	4

Within each neighbourhood centre, the principal entries of the establishments must be within a 300 foot (90 metre) walk distance from a single common point that represents the centre of the cluster (1 or 2 points) or within a 400 foot (120 metre) walk distance (3 or 4 points).

Also, projects with multiple centres must determine points earned based on the number of uses in the centres weighted by the percentage of total dwelling units within a 1/4 mile (400 metre) walk distance from each centre's common point.

AND

FOR PROJECTS WITH REGIONAL-SERVING RETAIL OF 150,000 (13,940) OR MORE SQUARE FEET (METRES)

Projects with retail uses totalling 150,000 or more square feet (13,940 or more square metres), if they have at least one retail establishment totalling 75,000 or more square feet (6970 or more square metres), must also earn a minimum of 1 point under SLL Credit 3, Reduced Automobile Dependence, Option 1, Transit-Served Location (planned transit service can be counted), and for every additional 50,000 square feet (4650 square metres) of retail above 150,000 square feet (13,940 square metres), must earn 1 additional point under SLL Credit 3.

If transit service is planned but not yet operational, the transit agency must certify that it has an approved budget that includes specifically allocated funds sufficient to provide the planned service at the levels listed above and that service at these levels will commence no later than occupancy of 50% of the project's total building square footage (floor area).

NPD Credit 4: Mixed-Income Diverse Communities

1–7 points

Intent

To promote socially equitable and engaging communities by enabling residents from a wide range of economic levels, household sizes, and age groups to live in a community.

Requirements

Meet the requirements of one or more options below.

OPTION 1. Diversity of Housing Types

Include a sufficient variety of housing sizes and types in the *project* such that the total variety of planned and *existing* housing within the project achieves a Simpson Diversity Index score greater than 0.5, using the housing categories below. Projects of less than 125 acres (50 hectares) may calculate the Simpson Diversity Index for the area within 1/4 mile (400 metres) of the project's geographic centre. The Simpson Diversity Index calculates the probability that any two randomly selected *dwelling units* in a project will be of a different type.

$$\text{Score} = 1 - \sum (n/N)^2$$

where n = the total number of dwelling units in a single category, and N = the total number of dwelling units in all categories.

Table 1. Points for housing diversity

Simpson Diversity Index score	Points
> 0.5 to < 0.6	1
≥ 0.6 to < 0.7	2
≥ 0.7	3

Housing categories are defined according to the dwelling unit's net square footage (metres), exclusive of any garage, as listed in Table 2.

Table 2. Housing categories

Type	Square feet	Square metres
Detached residential, large	> 1,250	> 115
Detached residential, small	≤ 1,250	≤ 115
Duplex or townhouse, large	> 1,250	> 115
Duplex or townhouse, small	≤ 1,250	≤ 115
Dwelling unit in multiunit building with no elevator, large	> 1,250	> 115
Dwelling unit in multiunit building with no elevator, medium	> 750 to ≤ 1,250	> 70 to ≤ 115
Dwelling unit in multiunit building with no elevator, small	≤ 750	≤ 70
Dwelling unit in multiunit building with elevator, 4 stories or fewer, large	> 1,250	> 115
Dwelling unit in multiunit building with elevator, 4 stories or fewer, medium	> 750 to ≤ 1,250	> 70 to ≤ 115
Dwelling unit in multiunit building with elevator, 4 stories or fewer, small	≤ 750	≤ 70
Dwelling unit in multiunit building with elevator, 5 to 8 stories, large	> 1,250	> 115
Dwelling unit in multiunit building with elevator, 5 to 8 stories, medium	> 750 to ≤ 1,250	> 70 to ≤ 115
Dwelling unit in multiunit building with elevator, 5 to 8 stories, small	≤ 750	≤ 70
Dwelling unit in multiunit building with elevator, 9 stories or more, large	> 1,250	> 115
Dwelling unit in multiunit building with elevator, 9 stories or more, medium	> 750 to ≤ 1,250	> 70 to ≤ 115
Dwelling unit in multiunit building with elevator, 9 stories or more, small	≤ 750	≤ 70
Live-work space, large	> 1,250	> 115
Live-work space, small	≤ 1,250	≤ 115
Accessory dwelling unit, large	> 1,250	> 115
Accessory dwelling unit, small	≤ 1,250	≤ 115

For the purposes of this credit, townhouse and live-work units may have individual ground-level entrances and/or be within a multiunit or mixed-use building. Double counting is prohibited; each dwelling may be classified in only one category. The number of stories in a building is inclusive of the ground floor regardless of its use.

AND/OR

OPTION 2. Affordable Housing

Include a proportion of new rental and/or for-sale dwelling units priced for households earning below the *area median income* (AMI). Rental units must be maintained at affordable levels for a minimum of 15 years. Existing dwelling units are exempt from requirement calculations. A maximum of 3 points may be earned by meeting any combination of thresholds in Table 3.

Table 3. Points for affordable housing

Rental dwelling units				For-sale dwelling units			
Priced up to 60% AMI		Priced up to 80% AMI		Priced up to 100% AMI		Priced up to 120% AMI	
Percentage of total rental units	Points	Percentage of total rental units	Points	Percentage of total for-sale units	Points	Percentage of total for-sale units	Points
5	1	10	1	5	1	8	1
10	2	15	2	10	2	12	2
15	3	25	3	15	3	--	--

AMI = area median income.

AND/OR

OPTION 3. Mixed-Income Diverse Communities

A project may earn 1 additional point by earning at least 2 points in Option 1 and at least 2 points in Option 2 (at least one of which must be for providing housing at or below 100% AMI).

NPD Credit 5: Reduced Parking Footprint

1 point

Intent

To design parking to increase the pedestrian orientation of *projects* and minimize the adverse environmental effects of parking facilities. To reduce public health risks by encouraging daily physical activity associated with walking and bicycling.

Requirements

For new nonresidential buildings and *multiunit residential* buildings, either do not build new off-street parking lots, or locate all new off-street surface parking lots at the side or rear of buildings, leaving building frontages facing streets free of surface parking lots.

AND

Use no more than 20% of the total *development footprint* area for all new off-street surface parking facilities, with no individual surface parking lot larger than 2 acres (.8 hectares). For the purposes of this credit, surface parking facilities include ground-level garages unless they are under *habitable building* space. Underground or multi-story parking facilities can be used to provide additional capacity, and on-street parking spaces are exempt from this limitation.

AND

Provide bicycle parking and storage capacity to new buildings as follows:

- a. **Multiunit residential.** Provide at least one secure, enclosed bicycle storage space per occupant for 30% of the *planned occupancy* but no fewer than one per unit. Provide secure visitor bicycle racks on-site, with at least one bicycle space per ten *dwelling units* but no fewer than four spaces per project site.
- b. **Retail.** Provide at least one secure, enclosed bicycle storage space per new retail worker for 10% of retail worker planned occupancy. Provide visitor or customer bicycle racks on-site, with at least one bicycle space per 5,000 square feet (465 square metres) of retail space, but no fewer than one bicycle space per business or four bicycle spaces per project site, whichever is greater. Provide at least one on-site shower with changing facility for any development with 100 or more new workers and at least one additional on-site shower with changing facility for every 150 new workers thereafter.
- c. **Nonresidential other than retail.** Provide at least one secure, enclosed bicycle storage space per new occupant for 10% of planned occupancy. Provide visitor bicycle racks on-site with at least one bicycle space per 10,000 square feet (930 square metres) of new commercial nonretail space but not fewer than four bicycle spaces per building. Provide at least one on-site shower with changing facility for any development with 100 or more new workers and at least one additional on-site shower with changing facility for every 150 new workers thereafter.

Secure, enclosed bicycle storage areas must be locked and easily accessible to residents and/or workers. Provide informational signage on using the storage facilities.

Visitors' and customers' bicycle racks must be clearly visible from a main entry, located within 100 feet (30 metres) of the door, served with night lighting, and protected from damage from nearby vehicles. If the building has multiple main entries, bicycle racks must be proportionally dispersed within 100 feet (30 metres) of each.

Shower and changing facility requirements may be met by providing the equivalent of free access to on-site health club shower facilities, if the health club can be accessed without going outside. Provide informational signage on using the shower facilities.

AND

Provide carpool and/or shared-use vehicle parking spaces equivalent to 10% of the total automobile parking for each nonresidential and mixed-use building on the site. Signage indicating such parking spots must be provided and the parking spots must be within 200 feet (60 metres) of entrances to the buildings served.

NPD Credit 6: Street Network

1–2 points


Intent

To promote *projects* that have high levels of internal connectivity and are well connected to the community at large. To encourage development within *existing* communities, thereby conserving land and promoting multimodal transportation. To improve public health by encouraging daily physical activity and reducing the negative effects of motor vehicle emissions.

Requirements

Design and/or locate the project such that a through-street and/or nonmotorized right-of-way intersects or terminates at the *project boundary* at least every 400 feet (120 metres) or at existing abutting street intervals and intersections, whichever is the shorter distance. Include a pedestrian or bicycle through-connection in at least 90% of any new *culs-de-sac*. This does not apply to portions of the boundary where connections cannot be made because of physical obstacles, such as prior platting of property, construction of existing buildings or other barriers, slopes over 15%, *wetlands* and *water bodies*, railroad and utility rights-of-way, existing limited-access motor vehicle rights-of-way, and parks and dedicated open space.

Figure 1. Project site with right-of-way intersects on project boundary at least every 400 feet (120 metres)

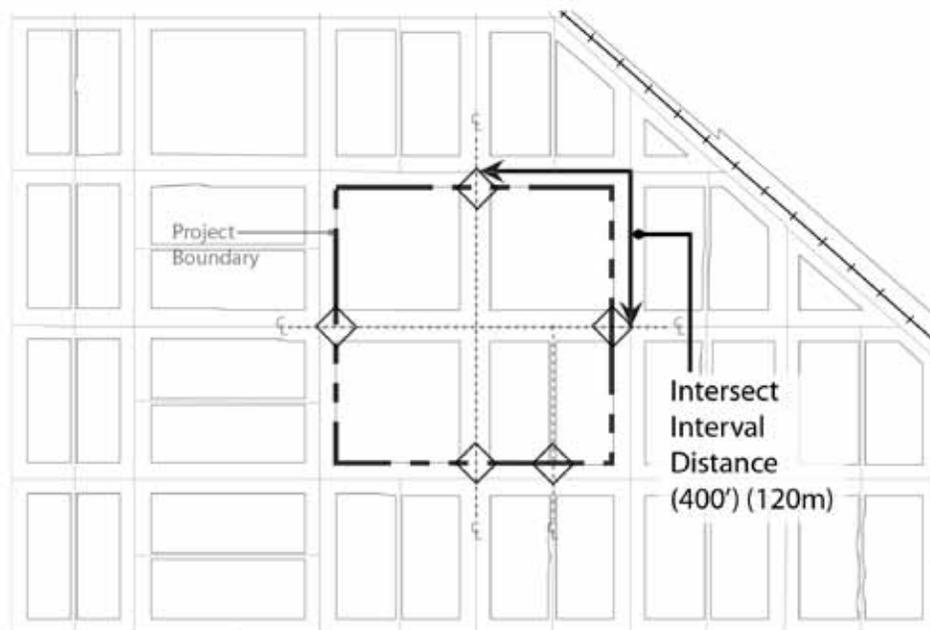

AND

Locate and/or design the project such that its internal connectivity and/or the connectivity within a 1/4 mile (400 metre) distance of the project boundary falls within one of the ranges listed in Table 1.

Table 1. Points for connectivity

Street intersections per square kilometre	Street intersections per square mile	Points
> 116 and ≤ 154	> 300 and ≤ 400	1
> 154	> 400	2

All streets and sidewalks that are counted toward the connectivity requirement must be available for general public use and not gated. Gated areas are not considered available for public use, with the exception of education and health care campuses, and military bases where gates are used for security purposes.

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

connectivity the number of publicly accessible street intersections per square mile, including intersections of streets with dedicated *alleys* and transit rights-of-way, and intersections of streets with nonmotorized rights-of-way. If one must both enter and exit an area through the same intersection, such an intersection and any intersections beyond that point are not counted; intersections leading only to *culs-de-sac* are also not counted. The calculation of square mileage excludes *water bodies*, *parks* larger than 1/2 acre (2020 square metres), public facility campuses, airports, rail yards, slopes over 15%, and areas nonbuildable under codified law or the rating system. Street rights-of-way may not be excluded.

NPD Credit 7: Transit Facilities

1 point

Intent

To encourage transit use and reduce driving by providing safe, convenient, and comfortable transit waiting areas and safe and secure bicycle storage facilities for transit users.

Requirements

Work with the transit agency or agencies serving the *project* to identify transit stop locations within and/or bordering the *project boundary* where transit agency-approved shelters and any other agency-required improvements, including bicycle racks, will be installed no later than construction of 50% of total project square footage (building floor area). At those locations, install approved shelters and any required improvements, or provide funding to the transit agency for their installation. Shelters must be covered, be at least partially enclosed to buffer wind and rain, and have seating and illumination. Any required bicycle racks must have a two-point support system for locking the frame and wheels and be securely affixed to the ground or a building.

AND

Work with the transit agency or agencies serving the project to identify locations within and bordering the project boundary where the agency determines that transit stops will be warranted within two years of project completion, either because of increased ridership on existing service resulting from the project or because of planned future transit. At those locations, reserve space for transit shelters and any required improvements, including bicycle racks. In lieu of or in addition to new stops, this requirement can be satisfied with a commitment from the transit agency to provide increased service to the transit stops that will have been installed at the time of 50% *build-out*.

AND

Work with the transit agency or agencies serving the project to provide kiosks, bulletin boards, and/or signs that display transit schedules and route information at each public transit stop within and bordering the project.

NPD Credit 8: Transportation Demand Management

1–2 points

Intent

To reduce energy consumption, pollution from motor vehicles, and adverse public health effects by encouraging multimodal travel.

Requirements

FOR ALL PROJECTS

Earn one point for every two options achieved below, for a maximum of two points. For the purposes of this credit, existing buildings and their occupants are exempt from the requirements.

OPTION 1. TDM Program

Create and implement a comprehensive transportation demand management (TDM) program for the *project* that reduces weekday peak-period motor vehicle trips by at least 20% compared with a baseline case, and fund the program for a minimum of three years following *build-out* of the project. The TDM program must be prepared by a qualified transportation professional. Any trip reduction effects of Options 2, 3, 4, or 5 may not be included in calculating the 20% threshold.

OR

OPTION 2. Transit Passes

Provide transit passes valid for at least one year, subsidized to be half of regular price or cheaper, to each occupant locating within the project during the first three years of project occupancy (or longer). Publicize the availability of subsidized transit passes are available to project occupants;

OR

OPTION 3. Developer-Sponsored Transit

Provide year-round, *developer*-sponsored private transit service (with vans, shuttles, buses) from at least one central point in the project to other major transit facilities, and/or other destinations such as a retail or *employment centre*, with service no less frequent than 45 daily weekday trips and 30 daily weekend trips. The service must begin by the time the project total square footage is 20% occupied and must be guaranteed for at least three years beyond project build-out. Twenty percent occupancy is defined as residents living in 20% of the *dwelling units* and/or employees working in 20% of the total nonresidential square footage.

Provide transit stop shelters and bicycle racks adequate to meet projected demand but no less than one shelter and one bicycle rack at each transit stop. Shelters must be covered, be at least partially enclosed to buffer wind and rain, and have seating and illumination. Bicycle racks must have a two-point support system for locking the frame and wheels and must be securely affixed to the ground or a building.

OR

OPTION 4. Vehicle Sharing

Locate the project such that 50% of the dwelling units and nonresidential building entrances are within a 1/4 mile (400 metre) *walk distance* of at least one vehicle in a vehicle-sharing program. For each vehicle, dedicate one parking space accessible to vehicle-sharing members. Through signage and other means, publicize to project occupants the availability and benefits of the vehicle-sharing program. If the project has more than 100 dwelling units and/or employees and has a minimum transit service of 60 daily weekday trips and 40 daily weekend trips, at least one additional vehicle and parking space for every 100 dwelling units and/or employees must be available.

If the project has more than 100 dwelling units and/or employees but does not have transit service at the frequencies specified above, at least one additional vehicle and parking space for every 200 dwelling units and/or employees must be available. Where new vehicle locations are created, a vehicle sharing program must begin by the time the project total footage (building floor area) is 20% occupied; commit to providing vehicles to the locations for at least two years. Twenty percent occupancy is defined as residents living in 20% of the project dwelling units and/or employees working in 20% of the total nonresidential square footage (building floor area) of the project.

OR

OPTION 5. Unbundling of Parking

For 90% of *multiunit residential* units and/or nonresidential square footage (building floor area), the associated parking spaces are sold or rented separately from the dwelling units and/or nonresidential square footage (building floor area).

NPD Credit 9: Access to Civic and Public Space

1 point

Intent

To improve physical and mental health and social capital by providing a variety of open spaces close to work and home to facilitate social networking, civic engagement, physical activity, and time spent outdoors.

Requirements

Locate and/or design the *project* such that a civic or passive-use space, such as a square, *park*, or *plaza*, at least 1/6 acre (670 square metres) in area lies within a 1/4 mile (400 metre) *walk distance* of 90% of planned and *existing dwelling units* and nonresidential building entrances. Spaces less than 1 acre (4050 square metres) must have a proportion no narrower than 1 unit of width to 4 units of length.

AND

For projects larger than 7 acres (2.8 hectares), locate and/or design the project such that the median size of civic or passive-use spaces within and/or contiguous to the project is at least 1/2 acre (2020 square metres).

Canadian Alternative Compliance Path

Locate and/or design the project such that a civic or passive-use space, such as a square, *park*, *paseo (promenade)*, or *plaza*, at least 1/6 acre (670 square metres) in area lies within a 1/4 mile (400 metre) *walk distance* of 90% of planned and existing dwelling units and nonresidential building entrances. With the exception of *neighbourhood greenways*, spaces less than 1 acre (4050 square metres) must have a proportion no narrower than 1 unit of width to 4 units of length.

AND

For projects larger than 7 acres (2.8 hectares), locate and/or design the project such that the median size of civic or passive-use spaces within and/or contiguous to the project is at least 1/2 acre (2020 square metres).

NPD Credit 10: Access to Recreation Facilities

1 point

Intent

To improve physical and mental health and social capital by providing a variety of recreational facilities close to work and home to facilitate physical activity and social networking.

Requirements

Locate and/or design the *project* so that a publicly accessible outdoor recreation facility at least 1 acre (4050 square metres) in area, or a publicly accessible indoor recreational facility of at least 25,000 square feet (2320 square metres), lies within a 1/2-mile (800 metre) walk distance of 90% of new and *existing dwelling units* and nonresidential building entrances. Outdoor recreation facilities must consist of physical improvements and may include “tot lots,” swimming pools, and sports fields, such as baseball diamonds.

NPD Credit 11: Visitability and Universal Design

1 point

Intent

To enable the widest spectrum of people, regardless of age or ability, to more easily participate in community life by increasing the proportion of areas usable by people of diverse abilities.

Requirements

OPTION 1. Projects with Dwelling Units

For each new *project dwelling unit* of the following residential building types, design to the applicable requirements specified:

Single dwelling unit buildings. Design a minimum of 20% of the dwelling units (and not less than one) in accordance with ICC/ANSI A117.1, Type C, Visitable Unit, each of which has an open-space plan for primary functions (an area for cooking, eating, and social gathering), as well as a sleeping area and a full bathroom.

Multiunit building with two or three dwelling units. Design a minimum of 20% of the dwelling units (and not less than one) in accordance with ICC/ANSI A117.1, Type C, Visitable Unit, each of which has a kitchen, dining area, living area, full bathroom, and bedroom on the accessible level. If a project has both attached and detached single dwelling unit buildings, the requirements apply to each type separately. Similarly, if a project has both 2- and 3- dwelling unit buildings, the requirements apply to each type.

Multiunit buildings with four or more dwelling units. This category includes mixed-use buildings with dwelling units. Design a minimum of 20% of the dwelling units (and not less than one) to incorporate the universal design requirements stated below, or comply with Option 2. Choose at least one of the following three strategies for universal design:

- a. Throughout the home, include at least five of the following universal design features to facilitate universal function, access, and user ability:
 - easy-to-grip lever door handles;
 - easy-to-grip cabinet and drawer loop handles;
 - easy-to-grip locking mechanisms on doors and windows;
 - easy-to-grip single-lever faucet handles
 - easy-touch rocker or hands-free switches;
 - motion-detector lighting at entrance, in hallways and stairwells, and in closets, and motion-detector light switches in garages, utility spaces, and basements;
 - large, high-contrast print for controls, signals, and the house or unit numbers;
 - a built-in shelf, bench, or table with knee space below, located outside the entry door with weather protection overhead, such as porch or stoop with roof, awning, or other overhead covering;

-
- a minimum 32 inch (810 millimetre) clear door opening width for all doorways;
 - tread at the entrance, on stairs, and other areas where slipping is common, with color contrast difference between stair treads and risers; and,
 - interior floor surfaces (e.g., low-pile carpets, hard-surface flooring) that provide easy passage for a wheelchair or walker, with color contrast between floor surfaces and trim. No carpet is permitted in a kitchen, bathroom, or other wet areas of the dwelling unit.

OR

- b. On the main floor of the home (or on another floor, if an elevator or stair lift is provided), provide a kitchen with hard-surface flooring, plumbing with single-lever controls, a 5 foot (1.5 metre) turning radius, and at least four of the following universal design features to facilitate universal function, access, and user-ability:
- variable height, 28 to 42 inch (710 to 1070 millimetre) or adjustable work surfaces, such as countertops, sinks, and/or cooktops;
 - clear knee space under sink and cooktops (this requirement can be met by installing removable base cabinets or fold-back or self-storing doors), cooktops and ranges with front or side-mounted controls, and wall-mounted ovens at a height to accommodate a seated adult;
 - a toe kick area at the base of lower cabinets with a minimum height of 9 inches (230 millimetres), and full-extension drawers and shelves in at least half (by volume) of the cabinets;
 - contrasting color treatment between countertops, front edges, and floor;
 - adjustable-height shelves in wall cabinets; and,
 - glare-free, task lighting to illuminate work areas without too much reflectivity.

OR

- c. On the main floor of the building (or on another floor, if an elevator or stair lift is provided), include all of the following:

In at least one accessible bedroom,

- size the room to accommodate a twin bed with a 5 foot (1.5 metre) turning radius around the bed;
- install a clothes closet with a 32 inch (810 millimetre) clear opening with adjustable-height closet rods and shelves;

In at least one full bathroom on the same floor as the bedroom,

- provide adequate manoeuvring space with a 30 by 48 inch (760 by 1220 millimetre) clear floor space at each fixture;
- centre the toilet 18 inches (460 millimetres) from any side wall, cabinet, or tub, and allow a 3 foot (910 millimetre) clear space in front;
- install broad blocking in walls around toilet, tub, and/or shower for future placement and relocation of grab bars;
- provide knee space under the lavatory (this requirement may be met by installing removable base cabinets or fold-back or self-storing doors); and,

-
- install a long mirror whose bottom is no more than 36 inches (910 millimetre) above the finished floor and whose top is at least 72 inches (1830 millimetres) high.

In addition, all bathrooms must have hard-surface flooring, all plumbing fixtures must have single-lever controls, and tubs or showers must have hand-held shower heads.

OR

OPTION 2. Projects with Noncompliant Public Rights-of-Way or Accessible Travel Routes

For projects with only nonresidential components, or residential components that are not within the scope of Option 1, but have public rights-of-way or other publicly accessible travel routes within the project that are not in compliance with Disabilities Act (for private sector and local and state government facilities) or the Architectural Barriers Act (for federally funded facilities), design, construct, and/or retrofit 100% of the rights-of-way and/or travel routes in accordance with the ADA-ABA Accessibility Guidelines, as applicable.

Canadian Alternative Compliance Path

FOR ALL PROJECTS

Apply section 6.1-6.6 of CSA B651-04 (R2010) - Accessible Design for the Built Environment to all new exterior publicly-accessible pedestrian travel routes, where the existing topography permits. Where the existing topography substantially limits the creation of such routes, provide alternative exterior publicly-accessible routes. Landscapes and exterior spaces that a local heritage conservation entity restricts alterations to are exempt from this requirement.

AND

OPTION 1. Projects with Dwelling Units

For each new *project dwelling unit* of the following residential building types, design to the applicable requirements specified:

Single dwelling unit buildings. Design a minimum of 20% of the dwelling units (and not less than one) in accordance with ICC/ANSI A117.1, Type C, VISIBLE Unit, each of which has an open-space plan for primary functions (an area for cooking, eating, and social gathering), as well as a sleeping area and a full bathroom.

Multiunit building with two or three dwelling units. Design a minimum of 20% of the dwelling units (and not less than one) in accordance with ICC/ANSI A117.1, Type C, VISIBLE Unit, each of which has a kitchen, dining area, living area, full bathroom, and bedroom on the accessible level. If a project has both attached and detached single dwelling unit buildings, the requirements apply to each type separately. Similarly, if a project has both 2- and 3- dwelling unit buildings, the requirements apply to each type.

Multiunit buildings with four or more dwelling units. This category includes mixed-use buildings with dwelling units. Design a minimum of 20% of the dwelling units (and not less than one) to incorporate the universal design requirements stated below, or comply with Option 2. Choose at least one of the following three strategies for universal design:

- a. Throughout the home, include at least five of the following universal design features to facilitate universal function, access, and user ability:
 - easy-to-grip lever door handles;
 - easy-to-grip cabinet and drawer loop handles;
 - easy-to-grip locking mechanisms on doors and windows;
 - easy-to-grip single-lever faucet handles;
 - easy-touch rocker or hands-free switches;
 - motion-detector lighting at entrance, in hallways and stairwells, and in closets, and motion-detector light switches in garages, utility spaces, and basements;
 - large, high-contrast print for controls, signals, and the house or unit numbers;
 - a built-in shelf, bench, or table with knee space below, located outside the entry door with weather protection overhead, such as porch or stoop with roof, awning, or other overhead covering;
 - a minimum 32 inch clear (310 millimetre) door opening width for all doorways;
 - tread at the entrance, on stairs, and other areas where slipping is common, with color contrast difference between stair treads and risers; and

-
- interior floor surfaces (e.g., low-pile carpets, hard-surface flooring) that provide easy passage for a wheelchair or walker, with color contrast between floor surfaces and trim. No carpet is permitted in a kitchen, bathroom, or other wet areas of the dwelling unit.

OR

- b. On the main floor of the home (or on another floor, if an elevator or stair lift is provided), provide a kitchen with hard-surface flooring, plumbing with single-lever controls, a 5 foot (1.5 metre) turning radius, and at least four of the following universal design features to facilitate universal function, access, and user-ability:
- variable-height 28 to 42 inch (710 to 1070 millimetre) or adjustable work surfaces, such as countertops, sinks, and/or cooktops;
 - clear knee space under sink and cooktops (this requirement can be met by installing removable base cabinets or fold-back or self-storing doors), cooktops and ranges with front or side-mounted controls, and wall-mounted ovens at a height to accommodate a seated adult;
 - a toe kick area at the base of lower cabinets with a minimum height of 9 inches (230 millimetres), and full-extension drawers and shelves in at least half (by volume) of the cabinets;
 - contrasting color treatment between countertops, front edges, and floor;
 - adjustable-height shelves in wall cabinets; and
 - glare-free task lighting to illuminate work areas without too much reflectivity.

OR

- c. On the main floor of the building (or on another floor, if an elevator or stair lift is provided), include all of the following:
- In at least one accessible bedroom,
- size the room to accommodate a twin bed with a 5 foot (1.5 metre) turning radius around the bed;
 - Install a clothes closet with a 32 inch (810 millimetre) clear opening with adjustable-height closet rods and shelves.
- In at least one full bathroom on the same floor as the bedroom,
- provide adequate manoeuvring space with a 30 by 48 inch (760 by 1220 millimetre) clear floor space at each fixture;
 - centre the toilet 18 inches (460 millimetres) from any side wall, cabinet, or tub, and allow a 3 foot (910 millimetre) clear space in front;
 - install broad blocking in walls around toilet, tub, and/or shower for future placement and relocation of grab bars;
 - provide knee space under the lavatory (this requirement may be met by installing removable base cabinets or fold-back or self-storing doors); and
 - install a long mirror whose bottom is no more than 36 inches (910 millimetres) above the finished floor and whose top is at least 72 inches (1830 millimetres) high.

In addition, all bathrooms must have hard-surface flooring, all plumbing fixtures must have single-lever controls, and tubs or showers must have hand-held shower heads.

OR

OPTION 2. Projects with Existing Noncompliant Public Rights-of-Way or Accessible Travel Routes, or Interior Publicly-Accessible Common-Use Routes

For projects with only nonresidential components, or residential components that are not within the scope of Option 1, but have existing public rights-of-way or other publicly accessible travel routes within the project that are not in compliance with section 6.1-6.6 of CSA B651-04 (R2010) - Accessible Design for the Built Environment, retrofit 100% of the rights-of-way and/or travel routes in accordance with section 6.1-6.6 of CSA B651-04 (R2010).

AND

For projects which have interior publicly-accessible *common-use routes* within the project that are not in compliance with section 4.1 of CSA B651-04 (R2010) - Accessible Design for the Built Environment, design, construct, and/or retrofit 100% of the interior publicly-accessible *common-use routes* in and connecting through buildings in accordance with section 4.1 of CSA B651-04 (R2010).

A common-use route is an interior pedestrian route that is meant to be accessed by all users of the building or a group of buildings, such as: the ground-floor lobby; hallways leading to elevators, stairs, washrooms, etc.; and tunnels and enclosed walkways connecting to adjacent buildings.

NPD Credit 12: Community Outreach and Involvement

1–2 points

Intent

To encourage responsiveness to community needs by involving the people who live or work in the community in *project* design and planning and in decisions about how it should be improved or how it should change over time.

Requirements

OPTION 1. Community Outreach (1 point)

Meet with adjacent property owners, residents, business owners, and workers; local planning and community development officials; and any current residents or workers at the project site to solicit and document their input on the proposed project prior to commencing a design.

AND

Work directly with community associations and/or the local government to advertise an open community meeting, other than an official public hearing, to generate comments on project design from the beginning.

AND

Host an open community meeting, other than an official public hearing, to solicit and document public input on the proposed project at the beginning of project design.

AND

Modify the project's conceptual design as a direct result of community input, or if modifications are not made, explain why community input did not generate design modifications.

AND

Establish ongoing means for communication between the developer and the community throughout the design and construction phases and, in cases where the developer maintains any control during the post construction phase.

OR

OPTION 2. Charrette (2 points)

Comply with Option 1 and conduct a design charrette or interactive workshop of at least two days and open to the public that includes, at a minimum, participation by a representative group of nearby property owners, residents, business owners, and workers in the preparation of conceptual project plans and drawings.

OR

OPTION 3. Local Endorsement Pursuant to Evaluation Program (2 points)

Comply with Option 1 and obtain an endorsement from an ongoing local or regional nongovernmental program that systematically reviews and endorses smart growth development projects under a rating and/or jury system.

NPD Credit 13: Local Food Production

1 point

Intent

To promote community-based food production, improve nutrition through increased access to fresh produce, support preservation of small farms producing a wide variety of crops, reduce the negative environmental effects of large-scale industrialized agriculture, and support local economic development that increases the economic value and production of farmlands and community gardens.

Requirements

FOR ALL PROJECTS

Establish *covenants, conditions, and restrictions* (CC&R) or other forms of deed restrictions which state that the growing of produce is not prohibited in *project* areas, including greenhouses, any portion of residential front, rear, or side yards; or balconies, patios, or rooftops. Greenhouses but not gardens may be prohibited in front yards that face the *street*.

AND

OPTION 1. Neighbourhood Farms and Gardens

Dedicate permanent and viable growing space and/or related facilities (such as greenhouses) within the project according to the square footage areas (square metres) specified in Table 1 (exclusive of *existing* dwellings). Provide solar access, fencing, watering systems, garden bed enhancements (such as raised beds), secure storage space for tools, and pedestrian access for these spaces. Ensure that the spaces are owned and managed by an entity that includes occupants of the project in its decision making, such as a community group, homeowners' association, or public body.

Table 1. Minimum garden space, by project density

Project density (DU/hectare)	Project density (DU/acre)	Growing space (per DU)
> 17 and ≤35	> 7 and ≤14	200 ft ² (18.5 m ²)
> 35 and ≤54	> 14 and ≤ 22	100 ft ² (9 m ²)
> 54 and ≤69	> 22 and ≤ 28	80 ft ² (7 m ²)
> 69 and ≤86	> 28 and ≤ 35	70 ft ² (6.5 m ²)
> 86	> 35	60 ft ² (5.5 m ²)

DU = dwelling unit; m² = square metres; ft² = square feet.

Established community gardens outside the *project boundary* but within a 1/2 mile (800 metre) *walk distance* of the project's geographic centre can satisfy this option if the garden otherwise meets all of the option requirements.

OR

OPTION 2. Community-Supported Agriculture

Purchase shares in a *community-supported agriculture* (CSA) program located within 150 miles (240 kilometres) of the project site for at least 80% of *dwelling units* within the project (exclusive of existing dwelling units) for two years, beginning with each dwelling unit's occupancy until the 80% threshold is reached. Shares must be delivered to a point within 1/2 mile (800 metres) of the project's geographic centre on a regular schedule not less than twice per month at least four months of the year.

OR

OPTION 3. Proximity To Farmers' Market

Locate the project's geographic centre within a 1/2 mile (800 metre) walk distance of an existing or planned farmers' market that is open or will operate at least once weekly for at least five months annually. Farmers' market vendors may sell only items grown within 150 miles of the project site. A planned farmers' market must have firm commitments from farmers and vendors that the market will meet all the above requirements and be in full operation by the time of 50% occupancy of the project's total square footage (building floor area).

NPD Credit 14: Tree-Lined and Shaded Streets

1–2 points

Intent

To encourage walking, bicycling and transit use and discourage excessive motoring speeds. To reduce urban heat island effects, improve air quality, increase evapotranspiration, and reduce cooling loads in buildings.

Requirements

OPTION 1. Tree-Lined Streets (1 point)

Design and build the *project* to provide street trees on both sides of at least 60% of new and *existing streets* within the project and on the project side of bordering streets, between the vehicle travel way and walkway, at intervals averaging no more than 40 feet (12 metres) (excluding driveways and utility vaults).

AND/OR

OPTION 2. Shaded Streets (1 point)

Trees or other structures provide shade over at least 40% of the length of sidewalks on streets within or contiguous to the project. Trees must provide shade within ten years of landscape installation. Use the estimated crown diameter (the width of the shade if the sun is directly above the tree) to calculate the shaded area.

AND

FOR ALL PROJECTS INVOLVING STREET TREE PLANTINGS

Obtain a registered landscape architect's determination that planting details are appropriate to growing healthy trees, taking into account tree species, root medium, and width and soil volume of planter strips or wells, and that the selected tree species are not considered *invasive* in the project context according to the USDA or the state agricultural extension service.

Canadian Alternative Compliance Path

OPTION 1. Tree-Lined Streets (1 point)

Design and build the *project* to provide street trees on both sides of at least 60% of new and *existing streets* within the project and on the project side of bordering streets, between the vehicle travel way and walkway, at intervals averaging no more than 40 feet (12 metres) (excluding driveways and utility vaults).

AND/OR

OPTION 2. Shaded Streets (1 point)

Trees or other structures provide shade over at least 40% of the length of sidewalks on streets within or contiguous to the project. Trees must provide shade within ten years of landscape installation. Use the estimated crown diameter (the width of the shade if the sun is directly above the tree) to calculate the shaded area.

AND

FOR ALL PROJECTS INVOLVING STREET TREE PLANTINGS

Obtain a registered landscape architect's determination that planting details are appropriate to growing healthy trees, taking into account tree species, root medium, and width and soil volume of planter strips or wells, and that the selected tree species are not considered *invasive* in the project context according to the Canadian Food Inspection Agency or the provincial or territorial body responsible for identifying invasive species.

NPD Credit 15: Neighbourhood Schools

1 point

Intent

To promote community interaction and engagement by integrating *schools* into the neighbourhood and to support students' health by encouraging walking and bicycling to school.

Requirements

Include in the *project* a residential component that constitutes at least 30% of the project's total building square footage, and locate or design the project such that at least 50% of the *dwelling units* are within a 1/2 mile (800 metre) *walk distance* of an *existing* or new elementary or middle school building entrance or within a 1 mile (1600 metre) walk distance of an existing or new high school building entrance. For any new school, the school district or equivalent organization must commit in a legally binding warrant that the school will be open by the time of occupancy of 50% of the project dwelling units.

Streets within and/or bordering the *project boundary* that lead from dwelling units to the school site must have a complete network of sidewalks on both sides and either bicycle lanes or traffic control and/or calming measures. If the school is planned as part of the project, it must be designed such that pedestrians and cyclists can easily reach building entrances without crossing bus zones, parking entrances, and student drop-off areas.

AND

New school campuses must not exceed the following:

- High schools, 15 acres (6 hectares).
- Middle schools, 10 acres (4 hectares).
- Elementary schools, 5 acre (2 hectares).

Schools combining grade levels from more than one category may use the grade level with the higher allowable acreage.

Facilities on the school site for which there is a formal joint-use agreement with another entity, such as athletic facilities, playgrounds, and multipurpose spaces in buildings, may be deducted from the total site area of the school.

GREEN INFRASTRUCTURE AND BUILDINGS

GIB Prerequisite 1: Certified Green Building

Required

Intent

To encourage the design, construction, and retrofit of buildings that utilize green building practices.

Requirements

Design, construct, or retrofit one whole building within the project to be certified through LEED for New Construction, LEED for Existing Buildings: Operations & Maintenance, LEED for Homes, LEED for Schools, LEED for Retail: New Construction, or LEED for Core and Shell (with at least 75% of the floor area certified under LEED for Commercial Interiors or LEED for Retail: Commercial Interiors), or through a green building rating system requiring review by independent, impartial, third-party certifying bodies that have either been accredited by an IAF accreditation body to, or could demonstrate compliance to, ISO 17021 or ISO/IEC Guide 65, or, when subsequently available, ISO/IEC 17065.

Canadian Alternative Compliance Path

Design, construct, or retrofit one whole building within the project to be certified through LEED Canada for New Construction, LEED Canada for Existing Buildings: Operations & Maintenance, LEED Canada for Homes, or LEED Canada for Core and Shell (with at least 75% of the floor area certified under LEED Canada for Commercial Interiors), or through a green building rating system requiring review by independent, impartial, third-party certifying bodies that have either been accredited by an IAF accreditation body to, or could demonstrate compliance to, ISO 17021 or ISO/IEC Guide 65, or, when subsequently available, ISO/IEC 17065.

GIB Prerequisite 2: Minimum Building Energy Efficiency

Required

Intent

To encourage the design and construction of energy-efficient buildings that reduce air, water, and land pollution and adverse environmental effects from energy production and consumption.

Requirements

The following requirement applies to 90% of the building floor area (rounded up to the next whole building) of all nonresidential buildings, mixed-use buildings, and *multiunit residential* buildings four stories or more constructed as part of the *project* or undergoing major renovations as part of the project.

New buildings must demonstrate an average 10% improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007 (with errata but without addenda). Buildings undergoing major renovations must demonstrate an average 5% improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007.

Projects must document building energy efficiency using one or a combination of the following:

- a. Produce a LEED-compliant energy model following the methodology outlined in the LEED rating system appropriate to each building's scope, including demonstration by a whole building project computer simulation using the building performance rating method in Appendix G of ANSI/ASHRAE/IESNA Standard 90.1–2007. Appendix G requires that the energy analysis done for the building performance rating method include all energy costs associated with the building project. Projects in California may use Title 24–2005, Part 6, in place of ANSI/ASHRAE/IESNA Standard 90.1–2007.
- b. Comply with the prescriptive measures of the ASHRAE Advanced Energy Design Guide listed below, appropriate to each building's scope. Comply with all applicable criteria as established in the guide for the climate zone in which the project is located.
 - ASHRAE Advanced Energy Design Guide for Small Office Buildings 2004 [office occupancy buildings less than 20,000 square feet (1860 square metres)];
 - ASHRAE Advanced Energy Design Guide for Small Retail Buildings 2006 [retail occupancy buildings less than 20,000 square feet (1860 square metres)];
 - ASHRAE Advanced Energy Design Guide for Small Warehouses and Self-Storage Buildings 2008 [warehouse or self-storage occupancy less than 50,000 square feet (4645 square metres)];
 - ASHRAE Advanced Energy Design Guide for K–12 School Buildings [K–12 school occupancy less than 200,000 square feet (18,600 square metres)].
- c. For buildings less than 100,000 square feet (9,290 square metres), comply with the prescriptive measures identified in the Advanced Buildings™ Core Performance™ Guide developed by the New Buildings Institute, as follows:
 - Comply with Section 1, Design Process Strategies, and Section 2, Core Performance Requirements, of the Core Performance Guide.
 - Health care, warehouse and laboratory projects are ineligible for this path.

If method (a) is used for all of the floor area evaluated in this prerequisite, the total percentage improvement is calculated as a sum of energy costs for each building compared with a baseline. If any combination of methods (a), (b), and (c) is used, the total percentage improvement is calculated as a weighted average based on building floor area. In determining the weighted average, buildings pursuing (a) will be credited at the percentage value determined by the energy model. Buildings pursuing (b) or (c) will be credited at 12% better than ANSI/ASHRAE/IESNA Standard 90.1–2007 for new buildings and 8% better for existing building renovations.

AND

For new *single-family residential* buildings and new multiunit residential buildings three stories or fewer, 90% of the buildings must meet ENERGY STAR or equivalent criteria. Projects may demonstrate compliance with ENERGY STAR criteria through the prescriptive requirements of a Builder Option Package, the *Home Energy Rating System (HERS)* index, or a combination of the two.

Project teams wishing to use ASHRAE-approved addenda for the purposes of this credit may do so at their discretion. Addenda must be applied consistently across all LEED credits.

Canadian Alternative Compliance Path

The following requirement applies to 90% of the building floor area (rounded up to the next whole building) of all nonresidential buildings, mixed-use buildings, and *multiunit residential* buildings four stories or more constructed as part of the project or undergoing major renovations as part of the project.

OPTION 1. ANSI/ASHRAE/IESNA Standard 90.1–2007

New buildings must demonstrate an average 10% cost improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007 (with errata but without addenda). Buildings undergoing major renovations must demonstrate an average 5% cost improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007. Projects must document building energy efficiency using one or a combination of the following:

- a. Produce a LEED-compliant energy model following the methodology outlined in the LEED rating system appropriate to each building’s scope, including demonstration by a whole building project computer simulation using the building performance rating method in Appendix G of ANSI/ASHRAE/IESNA Standard 90.1–2007. Appendix G requires that the energy analysis done for the building performance rating method include all energy costs associated with the building project.
- b. Comply with the prescriptive measures of the ASHRAE Advanced Energy Design Guide listed below, appropriate to each building’s scope. Comply with all applicable criteria as established in the guide for the climate zone in which the project is located.
 - ASHRAE Advanced Energy Design Guide for Small Office Buildings 2004 [office occupancy buildings less than 20,000 square feet (1860 square metres)]
 - ASHRAE Advanced Energy Design Guide for Small Retail Buildings 2006 [retail occupancy buildings less than 20,000 square feet (1860 square metres)]
 - ASHRAE Advanced Energy Design Guide for Small Warehouses and Self Storage Buildings 2008 [warehouse or self-storage occupancy less than 50,000 square feet (4645 square metres)]
 - ASHRAE Advanced Energy Design Guide for K–12 School Buildings [K–12 school occupancy less than 200,000 square feet (18,600 square metres)]
- c. For buildings less than 100,000 square feet (9,290 square metres), comply with the prescriptive measures identified in the Advanced Buildings™ Core Performance™ Guide developed by the New Buildings Institute, as follows:
 - Comply with Section 1, Design Process Strategies, and Section 2, Core Performance Requirements, of the Core Performance Guide.
 - Health care, warehouse and laboratory projects are ineligible for this path.

If method (a) is used for all of the floor area evaluated in this prerequisite, the total percentage improvement is calculated as a sum of energy costs for each building compared with a baseline. If any combination of methods (a), (b), and (c) is used, the total percentage improvement is calculated as a weighted average based on building floor area. In determining the weighted average, buildings pursuing (a) will be credited at the percentage value determined by the energy model. Buildings pursuing (b) or (c) will be credited at 12% better than ANSI/ASHRAE/IESNA Standard 90.1–2007 for new buildings and 8% better for *existing* building renovations.

OR

OPTION 2. Model National Energy Code For Buildings (MNECB) 1997

New buildings must demonstrate an average 23% cost improvement over the Model National Energy Code for Buildings (MNECB) 1997, and buildings undergoing major renovations as part of the project must demonstrate an average 19% improvement over the MNECB 1997.

For each building, calculate the reference building performance rating according to the MNECB 1997 using a computer simulation model for the whole building project. To achieve this credit, the proposed design must meet the following criteria:

- Comply with the mandatory provisions of the MNECB 1997.
- Inclusion of all the energy costs within and associated with the building project.
- Compare against a baseline building that complies with the reference building requirements as defined in the MNECB 1997.

For further guidance, refer to the *LEED Canada Reference Guide for Green Building Design and Construction 2009* and the *LEED Canada Energy Modelling Rules*.

If a combination of OPTION 1 and OPTION 2 is used, then both the portion of the project pursuing OPTION 1 and the portion of the project pursuing OPTION 2 must meet the requirements of this credit separately; the two portions cannot be combined as a weighted average. In addition, each individual *building* must choose either Option 1 or Option 2; a combination of the methods cannot be applied within a single *building*.

AND

FOR ALL PROJECTS:

For new *single-family residential* buildings and new multiunit residential buildings three stories or fewer, 90% of the buildings must achieve either:

- Home Energy Rating System (HERS) 80
- EnerGuide Rating System (ERS) 80 (using HOT 2000 v10.5)
- In Ontario, ENERGY STAR
- In Québec, Novoclimat 1
- LEED for Homes certification

Project teams wishing to use ASHRAE-approved addenda for the purposes of this credit may do so at their discretion. Addenda must be applied consistently across all LEED credits.

GIB Prerequisite 3: Minimum Building Water Efficiency

Required

Intent

To reduce effects on natural water resources and reduce burdens on community water supply and wastewater systems.

Requirements

For nonresidential buildings, mixed-use buildings, and multifamily residential buildings four stories or more.

Indoor water usage in new buildings and buildings undergoing major renovations as part of the project must be an average 20% less than in baseline buildings. The baseline usage is based on the requirements of the Energy Policy Act of 1992 and subsequent rulings by the Department of Energy, the requirements of the Energy Policy Act of 2005, and the fixture performance standards in the 2006 editions of the Uniform Plumbing Code or International Plumbing Code as to fixture performance. Calculations are based on estimated occupant usage and include only the following fixtures and fixture fittings (as applicable to the project scope): water closets (toilets), urinals, lavatory faucets, showers, kitchen sink faucets, and pre-rinse spray valves.

The water efficiency threshold is calculated as a weighted average of water usage for the buildings constructed as part of the project based on their conditioned square footage. Projects may also follow the LEED for Multiple Buildings and On-Campus Building Application Guide alternative calculation methodology to show compliance with this prerequisite.

Table 1. National commercial efficiency baselines

Commercial fixtures, fittings, or appliances	Current Baseline	
	IMPERIAL	METRIC
Commercial toilet	1.6 Gallons per flush (GPF)* Except blow-out fixtures: 3.5 GPF	6.0 Litres per flush (LPF) Except blow-out fixtures: 13.2 LPF
Commercial urinal	1.0 GPF	3.8 LPF
Commercial lavatory (restroom) faucet	2.2 Gallons per minute (GPM) at 60 pounds per square inch (psi), private applications only (hotel-motel guest rooms, hospital patient rooms)	8.3 Litres per minute (LPM) at 414 kilopascals (kPa) private applications only (hotel or motel guest rooms, hospital patient rooms)
	0.5 GPM at 60 psi** all others except private applications	1.9 LPM at 414 kPa all others except private applications
	0.25 Gallons per cycle for metering faucets	0.95 Litres per cycle for metering faucets
Commercial prerinse spray valve (for food service applications)	Flow rate ≤ 1.6 GPM (no pressure specified; no performance requirement)	Flow rate ≤ 6.0 LPM (no pressure specified; no performance requirement)
<p>* EAct 1992 standard for toilets applies to both commercial and residential models. ** In addition to EAct requirements, the American Society of Mechanical Engineers standard for public lavatory faucets is 0.5 gpm at 60 psi (ASME A112.18.1-2005). This maximum has been incorporated into the national Uniform Plumbing Code and the International Plumbing Code.</p>		

Table 2. National residential efficiency baselines

Residential Fixtures, Fittings, and Appliances	Current Baseline	
	IMPERIAL	METRIC
Residential toilet	6 GPF*	6.0 LPF at 414 kPa
Residential lavatory (bathroom) faucet	2.2 GPM at 60 psi	8.3 LPM at 414 kPa
Residential kitchen faucet		
Residential showerhead	2.5 GPM at 80 psi per shower stall**	9.5 LPM at 552 kPa per shower stall
<p>* EPA 1992 standard for toilets applies to both commercial and residential models. ** Residential shower compartment (stall) in dwelling units: The total allowable flow rate from all flowing showerheads at any given time, including rain systems, waterfalls, bodysprays, bodyspas, and jets, shall be limited to the allowable showerhead flow rate as specified above (2.5-gpm) per shower compartment, where the floor area of the shower compartment is less than 2,500 sq.in. For each increment of 2,500 sq.in. of floor area thereafter or part thereof, an additional showerhead with total allowable flow rate from all flowing devices equal to or less than the allowable flow rate as specified above shall be allowed. Exception: Showers that emit recirculated non-potable water originating from within the shower compartment while operating are allowed to exceed the maximum as long as the total potable water flow does not exceed the flow rate as specified above. Source: Adapted from information developed and summarized by the U.S. EPA Office of Water.</p>		

The following fixtures, fittings, and appliances are outside the scope of the water use reduction calculation:

- a. Commercial steam cookers.
- b. Commercial dishwashers.
- c. Automatic commercial ice makers.
- d. Commercial (family-sized) clothes washers.
- e. Residential clothes washers.
- f. Standard and compact residential dishwashers.

AND

For new *single-family residential* buildings and new multiunit residential buildings three stories or fewer, 90% of buildings must use a combination of fixtures that would earn 3 points under LEED for Homes 2008 Credit 3, Indoor Water Use.

Canadian Alternative Compliance Path

For nonresidential buildings, mixed-use buildings, and multifamily residential buildings four stories or more:

Indoor water usage in new buildings and buildings undergoing major renovations as part of the *project* must be an average 20% less than in baseline buildings.

The water efficiency threshold is calculated as a weighted average of water usage for the buildings constructed as part of the project based on their conditioned square footage (building floor area). Projects may also follow, and show equivalency to, the USGBC’s LEED for Multiple Buildings and On-Campus Building Application Guide alternative calculation methodology to show compliance with this prerequisite.

Calculate the baseline according to the commercial and/or residential baselines outlined below. Calculations are based on estimated occupant usage and must include only the following fixtures and fixture fittings (as applicable to the project scope): water closets, urinals, lavatory faucets, showers, kitchen sink faucets, and pre-rinse spray valves.

Table 1. Commercial efficiency baselines

Commercial fixtures, fittings, or appliances	Current Baseline	
	IMPERIAL	METRIC
Commercial Toilets	1.6 Gallons per flush (GPF)* Except blow-out fixtures: 3.5 GPF	6.0 Litres per flush (LPF) Except blow-out fixtures: 13.2 LPF
Commercial Urinals	1.0 GPF	3.8 LPF
Commercial Showerheads	2.5 GPM	9.5 LPM
Commercial lavatory (restroom) faucets	2.2 Gallons per minute (GPM) at 60 pounds per square inch (psi), private applications only (hotel or motel guest rooms, hospital patient rooms)	8.3 Litres per minute (LPM) at 414 kilopascals (kPa) private applications only (hotel or motel guest rooms, hospital patient rooms)
	0.5 GPM at 60 psi** all others except private applications	1.9 LPM at 414 kPa all others except private applications
	0.25 Gallons per cycle for metering faucets	0.95 Litres per cycle for metering faucets
Commercial pre-rinse spray valves (for food service applications)	Flow rate ≤ 1.6 GPM (no pressure specified; no performance requirement)	Flow rate ≤ 6.0 LPM (no pressure specified; no performance requirement)

* U.S. EPA 1992 standard for toilets applies to both commercial and residential models.
 ** In addition to U.S. EPA requirements, the American Society of Mechanical Engineers standard for public lavatory faucets is 0.5 gpm at 60 psi (ASME A112.18.1-2005). This maximum has been incorporated into the U.S. National Uniform Plumbing Code and the International Plumbing Code.

Table 2. Residential efficiency baselines

Residential Fixtures, Fittings, and Appliances	Current Baseline	
	IMPERIAL	METRIC
Residential Toilets	1.6 GPF*	6.0 LPF at 414 kPa
Residential Lavatory Faucets	2.2 GPM at 60 psi	8.3 LPM at 414 kPa
Residential Kitchen Faucets		
Residential Showerheads	2.5 GPM at 80 psi per shower stall**	9.5 LPM at 552 kPa per shower stall
<p>* U.S. EPAAct 1992 standard for toilets applies to both commercial and residential models. ** Residential shower compartment (stall) in dwelling units: The total allowable flow rate from all flowing showerheads at any given time, including rain systems, waterfalls, bodysprays, bodyspas, and jets, must be limited to the allowable showerhead flow rate as specified above 9.5 LPM (2.5 GPM) per shower compartment, where the floor area of the shower compartment is less than 1.6 square metres (2,500 square inches). For each increment of 1.6 square metres (2,500 square inches) of floor area thereafter or part thereof, an additional showerhead with total allowable flow rate from all flowing devices equal to or less than the allowable flow rate as specified above must be allowed. Exception: Showers that emit recirculated non-potable water originating from within the shower compartment while operating are allowed to exceed the maximum as long as the total potable water flow does not exceed the flow rate as specified above.</p> <p>Tables adapted from information developed and summarized by the U.S. Environmental Protection Agency (EPA) Office of Water based on requirements of the Energy Policy Act (EPAAct) of 1992 and subsequent rulings by the US Department of Energy, requirements of the EPAAct of 2005, and the plumbing code requirements as stated in the 2006 editions of the Uniform Plumbing Code or International Plumbing Code pertaining to fixture performance.</p>		

The following fixtures, fittings, and appliances are outside the scope of the water use reduction calculation:

- a. Commercial steam cookers.
- b. Commercial dishwashers.
- c. Automatic commercial ice makers.
- d. Commercial (family-sized) clothes washers.
- e. Residential clothes washers.
- f. Standard and compact residential dishwashers.

AND

For new *single-family residential* buildings and new *multiunit residential* buildings three stories or fewer, 90% of buildings must use a combination of fixtures that would earn 3 points under LEED Canada for Homes 2009 Credit 3, Indoor Water Use.

GIB Prerequisite 4: Construction Activity Pollution Prevention

Required

Intent

To reduce pollution from construction activities by controlling soil erosion, waterway sedimentation, and airborne dust generation.

Requirements

Create and implement an erosion and sedimentation control plan for all new construction activities associated with the *project*. The plan must incorporate practices such as phasing, seeding, grading, mulching, filter socks, stabilized site entrances, preservation of *existing* vegetation, and other best management practices (BMPs) to control erosion and sedimentation in runoff from the entire project site during construction. The plan must list the BMPs employed and describe how they accomplish the following objectives:

- a. Prevent loss of soil during construction by stormwater runoff and/or wind erosion, including but not limited to stockpiling of topsoil for reuse.
- b. Prevent sedimentation of any affected stormwater conveyance systems or receiving streams.
- c. Prevent polluting the air with dust and particulate matter.

The erosion and sedimentation control plan must describe how the project team will do the following:

- a. Preserve vegetation and mark clearing limits.
- b. Establish and delineate construction access.
- d. Control flow rates.
- c. Install sediment controls.
- e. Stabilize soils.
- d. Protect slopes.
- f. Protect drain inlets.
- e. Stabilize channels and outlets.
- g. Control pollutants.
- f. Control dewatering.
- k. Maintain the BMPs.
- l. Manage the erosion and sedimentation control plan.

The BMPs must be selected from the Washington State Department of Ecology's *Stormwater Management Manual for Western Washington, Volume II, Construction Stormwater Pollution Prevention* (2005 edition), or a locally approved equivalent, whichever is more stringent, and must comply with all federal, state (provincial/territorial), and local erosion and sedimentation control regulations.

GIB Credit 1: Certified Green Buildings

1–5 points

Intent

To encourage the design, construction, and retrofit of buildings that utilize green building practices.

Requirements

OPTION 1. Projects with 10 or Fewer Habitable Buildings

Design, construct, or retrofit one building as part of the *project*, beyond the prerequisite, to be certified under one of the following LEED green building rating systems: LEED for New Construction, LEED for Existing Buildings, LEED for Homes, LEED for Schools, LEED for Retail: New Construction, or LEED for Core & Shell (with at least 75% of the floor area certified under LEED for Commercial Interiors or LEED for Retail: Commercial Interiors) or through a green building rating system requiring review by independent, impartial, third-party certifying bodies that have either been accredited by an IAF accreditation body to, or could demonstrate compliance to, ISO 17021 or ISO/IEC Guide 65, and, when subsequently available, ISO/IEC 17065. Additional points (up to 5) may be earned for each additional certified building that is part of the project.

OR

OPTION 2. Projects of All Sizes

Design, construct, or retrofit a percentage of the total project building square footage (floor area), beyond the prerequisite requirement, to be certified under one of the LEED green building rating systems listed above or through a green building rating system requiring review by independent, impartial, third-party certifying bodies that have either been accredited by an IAF accreditation body to, or could demonstrate compliance to, ISO 17021 or ISO/IEC Guide 65, or, when subsequently available, ISO/IEC 17065.

Table 1. Points for green building certification

Percentage of building floor area certified	Points
≥ 10% and < 20%	1
≥ 20% and < 30%	2
≥ 30% and < 40%	3
≥ 40% and < 50%	4
≥ 50%	5

AND

FOR ALL PROJECTS

Detached accessory *dwelling units* must be counted as separate buildings. Accessory dwellings attached to a main building are not counted separately.

Canadian Alternative Compliance Path

OPTION 1. Projects with 10 or Fewer Habitable Buildings

Design, construct, or retrofit one building as part of the *project*, beyond the prerequisite, to be certified under one of the following LEED green building rating systems: LEED Canada for New Construction, LEED Canada for Existing Buildings: Operations & Maintenance, LEED Canada for Homes, or LEED Canada for Core and Shell (with at least 75% of the floor area certified under LEED Canada for Commercial Interiors), or through a green building rating system requiring review by independent, impartial, third-party certifying bodies that have either been accredited by an IAF accreditation body to, or could demonstrate compliance to, ISO 17021 or ISO/IEC Guide 65, or, when subsequently available, ISO/IEC 17065. Additional points (up to 5) may be earned for each additional certified building that is part of the project.

OR

OPTION 2. Projects of All Sizes

Design, construct, or retrofit a percentage of the total project building square footage (floor area), beyond the prerequisite requirement, to be certified under one of the LEED green building rating systems listed above or through a green building rating system requiring review by independent, impartial, third-party certifying bodies that have either been accredited by an IAF accreditation body to, or could demonstrate compliance to, ISO 17021 or ISO/IEC Guide 65, or, when subsequently available, ISO/IEC 17065.

Table 1. Points for green building certification

Percentage of building floor area certified	Points
≥ 10% and < 20%	1
≥ 20% and < 30%	2
≥ 30% and < 40%	3
≥ 40% and < 50%	4
≥ 50%	5

AND

FOR ALL PROJECTS

Detached accessory *dwelling units* must be counted as separate buildings. Accessory dwellings attached to a main building are not counted separately.

GIB Credit 2: Building Energy Efficiency

2 points

Intent

To encourage the design and construction of energy-efficient buildings that reduce air, water, and land pollution and adverse environmental effects from energy production and consumption.

Requirements

The following requirement applies to 90% of the building floor area (rounded up to the next whole building) of all nonresidential buildings, mixed-use buildings, and *multiunit residential* buildings four stories or more constructed as part of the *project* or undergoing major renovations as part of the project.

New buildings must demonstrate an average 18% (1 point) or 26% (2 points) improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007 (with errata but without addenda). Buildings undergoing major renovations as part of the project must demonstrate an average 14% (1 point) or 22% (2 points) improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007.

Projects must document building energy efficiency using one or a combination of the following:

- a. Produce a LEED-compliant energy model following the methodology outlined in the LEED rating system appropriate to each building's scope, including demonstration by a whole building project computer simulation using the building performance rating method in Appendix G of ANSI/ASHRAE/IESNA Standard 90.1–2007. Appendix G requires that the energy analysis done for the building performance rating method include all energy costs associated with the building project. Projects in California may use Title 24–2005, Part 6, in place of ANSI/ASHRAE/IESNA Standard 90.1–2007.
- b. Comply with the prescriptive measures of the ASHRAE Advanced Energy Design Guide listed below, appropriate to each building's scope. Comply with all applicable criteria as established in the guide for the climate zone in which the project is located.
 - ASHRAE Advanced Energy Design Guide for Small Office Buildings 2004 (office occupancy buildings less than 20,000 square feet [1860 square metres]).
 - ASHRAE Advanced Energy Design Guide for Small Retail Buildings 2006 (retail occupancy buildings less than 20,000 square feet [1860 square metres]).
 - ASHRAE Advanced Energy Design Guide for Small Warehouses and Self-Storage Buildings 2008 (warehouse or self-storage occupancy less than 50,000 square feet [4645 square metres]).
 - ASHRAE Advanced Energy Design Guide for K–12 School Buildings (K–12 school occupancy less than 200,000 square feet [18,600 square metres]).
- c. For buildings less than 100,000 square feet (9,290 square metres), comply with the prescriptive measures identified in the Advanced Buildings™ Core Performance™ Guide developed by the New Buildings Institute, as follows:
 - Comply with Section 1, Design Process Strategies, and Section 2, Core Performance Requirements, of the Core Performance Guide.
 - Health care, warehouse and laboratory projects are ineligible for this path.

If method (a) is used for all of the floor area evaluated in this prerequisite, the total percentage improvement is calculated as a sum of energy costs for each building compared with a baseline. If any combination of methods (a), (b), and (c) is used, the total percentage improvement is calculated as a weighted average based on building floor area. In determining the weighted average, buildings pursuing (a) will be credited at the percentage value determined by the energy model. Buildings pursuing (b) or (c) will be credited at 12% better than ANSI/ASHRAE/IESNA Standard 90.1-2007 for new buildings and 8% better for existing building renovations.

AND

For new *single-family* residential buildings and new multiunit residential buildings three stories or fewer, 90% of the buildings must achieve a *Home Energy Rating System (HERS)* index score of at least 75.

Project teams wishing to use ASHRAE-approved addenda for the purposes of this credit may do so at their discretion. Addenda must be applied consistently across all LEED credits.

Canadian Alternative Compliance Path

The following requirement applies to 90% of the building floor area (rounded up to the next whole building) of all nonresidential buildings, mixed-use buildings, and *multiunit residential* buildings four stories or more constructed as part of the PROJECT or undergoing major renovations as part of the project.

OPTION 1. ANSI/ASHRAE/IESNA Standard 90.1–2007

New buildings must demonstrate an average 18% (1 point) or 26% (2 points) improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007 (with errata but without addenda). Buildings undergoing major renovations as part of the project must demonstrate an average 14% (1 point) or 22% (2 points) improvement over ANSI/ASHRAE/IESNA Standard 90.1–2007.

Projects must document building energy efficiency using one or a combination of the following:

- a. Produce a LEED-compliant energy model following the methodology outlined in the LEED rating system appropriate to each building's scope, including demonstration by a whole building project computer simulation using the building performance rating method in Appendix G of ANSI/ASHRAE/IESNA Standard 90.1–2007. Appendix G requires that the energy analysis done for the building performance rating method include all energy costs associated with the building project.
- b. Comply with the prescriptive measures of the ASHRAE Advanced Energy Design Guide listed below, appropriate to each building's scope. Comply with all applicable criteria as established in the guide for the climate zone in which the project is located.
 - ASHRAE Advanced Energy Design Guide for Small Office Buildings 2004 (office occupancy buildings less than 20,000 square feet [1860 square metres])
 - ASHRAE Advanced Energy Design Guide for Small Retail Buildings 2006 (retail occupancy buildings less than 20,000 square feet [1860 square metres])
 - ASHRAE Advanced Energy Design Guide for Small Warehouses and Self-Storage Buildings 2008 (warehouse or self-storage occupancy less than 50,000 square feet [4645 square metres])
 - ASHRAE Advanced Energy Design Guide for K–12 School Buildings (K–12 school occupancy less than 200,000 square feet [18,600 square metres])
- c. For buildings less than 100,000 square feet (9,290 square metres), comply with the prescriptive measures identified in the Advanced Buildings™ Core Performance™ Guide developed by the New Buildings Institute, as follows:
 - Comply with Section 1, Design Process Strategies, and Section 2, Core Performance Requirements, of the Core Performance Guide.
 - Health care, warehouse and laboratory projects are ineligible for this path.

If method (a) is used for all of the floor area evaluated in this prerequisite, the total percentage improvement is calculated as a sum of energy costs for each building compared with a baseline. If any combination of methods (a), (b), and (c) is used, the total percentage improvement is calculated as a weighted average based on building floor area. In determining the weighted average, buildings pursuing (a) will be credited at the percentage value determined by the energy model. Buildings pursuing (b) or (c) will be credited at 12% better than ANSI/ASHRAE/IESNA Standard 90.1–2007 for new buildings and 8% better for existing building renovations.

OR

OPTION 2. Model National Energy Code For Buildings (MNECB) 1997

New buildings must demonstrate an average 30% (1 point) or 37% (2 points) improvement over the Model National Energy Code for Buildings (MNECB) 1997. Buildings undergoing major renovations as part of the project must demonstrate an average 27% (1 point) or 33% (2 points) improvement over the MNECB 1997.

For each building, calculate the reference building performance rating according to the MNECB 1997 using a computer simulation model for the whole building project. To achieve this credit, the proposed design must meet the following criteria:

- Comply with the mandatory provisions of the MNECB 1997.
- Inclusion of all the energy costs within and associated with the building project.
- Compare against a baseline building that complies with the reference building requirements as defined in the MNECB 1997.

For further guidance, refer to the *LEED Canada Reference Guide for Green Building Design and Construction 2009* and the *LEED Canada Energy Modelling Rules*.

If a combination of OPTION 1 and OPTION 2 is used, then both the portion of the project pursuing OPTION 1 and the portion of the project pursuing OPTION 2 must meet the requirements of this credit separately; the two portions cannot be combined as a weighted average. In addition, each individual *building* must choose either Option 1 or Option 2; a combination of the methods cannot be applied within a single *building*.

AND

FOR ALL PROJECTS:

For new *single-family residential* buildings and new multiunit residential buildings three stories or fewer, 90% of the buildings must achieve either:

- Home Energy Rating System (HERS) 75; or
- EnerGuide Rating System (ERS) 82 (using HOT 2000 v10.5).

Project teams wishing to use ASHRAE-approved addenda for the purposes of this credit may do so at their discretion. Addenda must be applied consistently across all LEED credits.

GIB Credit 3: Building Water Efficiency

1 point

Intent

To reduce effects on natural water resources and reduce burdens on community water supply and wastewater systems.

Requirements

For nonresidential buildings, mixed-use buildings, and multifamily residential buildings four stories or more:

Indoor water usage in new buildings and buildings undergoing major renovations as part of the *project* must be an average 40% less than in baseline buildings. The baseline usage is based on the requirements of the Energy Policy Act of 1992 and subsequent rulings by the Department of Energy, the requirements of the Energy Policy Act of 2005, and the fixture performance standards in the 2006 editions of the Uniform Plumbing Code or International Plumbing Code as to fixture performance. Calculations are based on estimated occupant usage and include only the following fixtures and fixture fittings (as applicable to the project scope): water closets (toilets), urinals, lavatory faucets, showers, kitchen sink faucets, and pre-rinse spray valves.

The water efficiency threshold is calculated as a weighted average of water usage for the buildings constructed as part of the project based on their conditioned square footage. Projects may also follow the LEED for Multiple Buildings and On-Campus Building Application Guide alternative calculation methodology to show compliance with this prerequisite.

Table 1. National commercial efficiency baselines

Commercial fixtures, fittings, or appliances	Baseline water usage	
	IMPERIAL	METRIC
Commercial toilet	1.6 Gallons per flush (GPF)* Except blow-out fixtures: 3.5 GPF	6.0 Litres per flush (LPF) Except blow-out fixtures: 13.2 LPF
Commercial urinal	1.0 GPF	3.8 LPF
Commercial lavatory (restroom) faucet	2.2 Gallons per minute (GPM) at 60 pounds per square inch (psi), private applications only (hotel-motel guest rooms, hospital patient rooms)	8.3 Litres per minute (LPM) at 414 kilopascals (kPa) private applications only (hotel or motel guest rooms, hospital patient rooms)
	0.5 GPM at 60 psi** all others except private applications	1.9 LPM at 414 kPa all others except private applications
	0.25 Gallons per cycle for metering faucets patient rooms)	0.95 Litres per cycle for metering faucets
Commercial prerinse spray valve (for food service applications)	Flow rate ≤ 1.6 GPM (no pressure specified; no performance requirement)	Flow rate ≤ 6.0 LPM (no pressure specified; no performance requirement)
<p>* EPA 1992 standard for toilets applies to both commercial and residential models. ** In addition to EPA requirements, the American Society of Mechanical Engineers standard for public lavatory faucets is 0.5 gpm at 60 psi (ASME A112.18.1-2005). This maximum has been incorporated into the national Uniform Plumbing Code and the International Plumbing Code.</p>		

Table 2. National residential efficiency baselines

Residential Fixtures, Fittings, and Appliances	Current Baseline	
	IMPERIAL	METRIC
Residential toilet	1.6 GPF*	6.0 LPF at 414 kPa
Residential lavatory (bathroom) faucet	2.2 GPM at 60 psi	8.3 LPM at 414 kPa
Residential kitchen faucet		
Residential showerhead	2.5 GPM at 80 psi per shower stall**	9.5 LPM at 552 kPa per shower stall
<p>* EPA 1992 standard for toilets applies to both commercial and residential models. ** Residential shower compartment (stall) in dwelling units: The total allowable flow rate from all flowing showerheads at any given time, including rain systems, waterfalls, bodysprays, bodyspas, and jets, shall be limited to the allowable showerhead flow rate as specified above (2.5-gpm) per shower compartment, where the floor area of the shower compartment is less than 2,500 sq.in. For each increment of 2,500 sq.in. of floor area thereafter or part thereof, an additional showerhead with total allowable flow rate from all flowing devices equal to or less than the allowable flow rate as specified above shall be allowed. Exception: Showers that emit recirculated non-potable water originating from within the shower compartment while operating are allowed to exceed the maximum as long as the total potable water flow does not exceed the flow rate as specified above.</p>		

The following fixtures, fittings, and appliances are outside the scope of the water use reduction calculation:

- a. Commercial steam cookers.
- b. Commercial dishwashers.
- c. Automatic commercial ice makers.
- d. Commercial (family-sized) clothes washers.
- e. Residential clothes washers.
- f. Standard and compact residential dishwashers.

AND

For new *single-family residential* buildings and new *multiunit residential* buildings three stories or fewer, 90% of buildings must use a combination of fixtures that would earn 5 points under LEED for Homes 2008 WE Credit 3, Indoor Water Use.

Canadian Alternative Compliance Path

For nonresidential buildings, mixed-use buildings, and multifamily residential buildings four stories or more:

Indoor water usage in new buildings and buildings undergoing major renovations as part of the *project* must be an average 40% less than in baseline buildings.

The water efficiency threshold is calculated as a weighted average of water usage for the buildings constructed as part of the project based on their conditioned square footage (building floor area). Projects may also follow, and show equivalency to, the USGBC’s LEED for Multiple Buildings and On-Campus Building Application Guide alternative calculation methodology to show compliance with this prerequisite.

Calculate the baseline according to the commercial and/or residential baselines outlined below. Calculations are based on estimated occupant usage and must include only the following fixtures and fixture fittings (as applicable to the project scope): water closets, urinals, lavatory faucets, showers, kitchen sink faucets, and pre-rinse spray valves.

Table 1. Commercial efficiency baselines

Commercial Fixtures, Fittings and Appliances	Current Baseline	
	IMPERIAL	METRIC
Commercial Toilets	1.6 Gallons per flush (GPF)* Except blow-out fixtures: 3.5 GPF	6.0 Litres per flush (LPF) Except blow-out fixtures: 13.2 LPF
Commercial Urinals	1.0 GPF	3.8 LPF
Commercial lavatory (restroom) faucets	2.2 Gallons per minute (GPM) at 60 pounds per square inch (psi), private applications only (hotel or motel guest rooms, hospital patient rooms)	8.3 Litres per minute (LPM) at 414 kilopascals (kPa) private applications only (hotel or motel guest rooms, hospital patient rooms)
	0.5 GPM at 60 psi** all others except private applications	1.9 LPM at 414 kPa all others except private applications
	0.25 Gallons per cycle for metering faucets	0.95 Litres per cycle for metering faucets
Commercial pre-rinse spray valves (for food service applications)	Flow rate ≤ 6.0 LPM (no pressure specified; no performance requirement)	Flow rate ≤ 6.0 LPM (no pressure specified; no performance requirement)
<p>* EAct 1992 standard for toilets applies to both commercial and residential models. ** In addition to EAct requirements, the American Society of Mechanical Engineers standard for public lavatory faucets is 0.5 gpm at 60 psi (ASME A112.18.1-2005). This maximum has been incorporated into the national Uniform Plumbing Code and the International Plumbing Code.</p>		

Table 2. Residential efficiency baselines

Residential Fixtures, Fittings and Appliances	Current Baseline	
	IMPERIAL	METRIC
Residential Toilets	1.6 GPF*	6.0 LPF at 414 kPa
Residential Lavatory Faucets	2.2 GPM at 60 psi	8.3 LPM at 414 kPa
Residential Kitchen Faucets		
Residential Showerheads	2.5 GPM at 80 psi per shower stall**	9.5 LPM at 552 kPa per shower stall

* U.S. EPA Act 1992 standard for toilets applies to both commercial and residential models.
 ** Residential shower compartment (stall) in dwelling units: The total allowable flow rate from all flowing showerheads at any given time, including rain systems, waterfalls, bodysprays, bodyspas, and jets, must be limited to the allowable showerhead flow rate as specified above 9.5 LPM (2.5 GPM) per shower compartment, where the floor area of the shower compartment is less than 1.6 square metres (2,500 square inches). For each increment of 1.6 square metres (2,500 square inches) of floor area thereafter or part thereof, an additional showerhead with total allowable flow rate from all flowing devices equal to or less than the allowable flow rate as specified above must be allowed. Exception: Showers that emit recirculated non-potable water originating from within the shower compartment while operating are allowed to exceed the maximum as long as the total potable water flow does not exceed the flow rate as specified above. Tables adapted from information developed and summarized by the U.S. Environmental Protection Agency (EPA) Office of Water based on requirements of the Energy Policy Act (EPA) of 1992 and subsequent rulings by the US Department of Energy, requirements of the EPA Act of 2005, and the plumbing code requirements as stated in the 2006 editions of the Uniform Plumbing Code or International Plumbing Code pertaining to fixture performance.

The following fixtures, fittings and appliances are outside the scope of water use reduction calculation:

- a. Commercial Steam Cookers
- b. Commercial Dishwashers
- c. Automatic Commercial Ice Makers
- d. Commercial (family-sized) Clothes Washers
- e. Residential Clothes Washers
- f. Standard and Compact Residential Dishwashers

AND

For new *single-family residential* buildings and new *multiunit residential* buildings three stories or fewer, 90% of buildings must use a combination of fixtures that would earn 5 points under LEED Canada for Homes 2009 Credit 3, Indoor Water Use.

GIB Credit 4: Water-Efficient Landscaping

1 point

Intent

To limit or eliminate the use of *potable water* and other natural surface or subsurface water resources on *project* sites, for landscape irrigation.

Requirements

Reduce water consumption for outdoor landscape irrigation by 50% from a calculated midsummer baseline case. Reductions may be attributed to any combination of the following strategies, among others:

- a. Plant species, plant density, and microclimate factor.
- b. Irrigation efficiency.
- c. Use of captured rainwater.
- d. Use of recycled wastewater.
- e. Use of water treated and conveyed by a public agency specifically for nonpotable uses.
- f. Use of other nonpotable water sources, such as stormwater, air-conditioning condensate, and foundation drain water.

Projects with no new or *existing* landscape irrigation requirements automatically meet the credit requirements.

Groundwater seepage that is pumped away from the immediate vicinity of buildings slabs and foundations can be used for landscape irrigation and meet the intent of this credit. However, it must be demonstrated that doing so does not affect site stormwater management systems.

GIB Credit 5: Existing Building Reuse

1 point

Intent

To extend the life cycle of *existing* building stock to conserve resources, reduce waste, and reduce adverse environmental effects of new buildings related to materials manufacturing and transport.

Requirements

Reuse the existing *habitable building* stock, achieving the greater of the following two benchmarks (based on surface area):

- a. 50% of one existing building structure (including structural floor and roof decking) and envelope (including exterior skin and framing but excluding window assemblies and non-structural roofing material).
- b. 20% of the total existing building stock (including structure and envelope, as defined above). Hazardous materials that are remediated as a part of the project scope must be excluded from the calculations.

AND

FOR ALL PROJECTS

Do not demolish any *historic buildings*, or portions thereof, or alter any *cultural landscapes* as part of the project.

An exception is granted only if such action has been approved by an appropriate review body. For buildings listed locally, approval must be granted by the local historic preservation review board, or equivalent. For buildings listed in a state register or in the National Register of Historic Places, approval must appear in a programmatic agreement with the State Historic Preservation Office.

Canadian Alternative Compliance Path

Reuse the existing *habitable building* stock, achieving the greater of the following two benchmarks (based on surface area):

- a. 50% of one existing building structure (including structural floor and roof decking) and envelope (including exterior skin and framing but excluding window assemblies and non-structural roofing material).
- b. 20% of the total existing building stock (including structure and envelope, as defined above). Hazardous materials that are remediated as a part of the project scope must be excluded from the calculations.

AND

FOR ALL PROJECTS

Do not demolish any *historic buildings*, or portions thereof, or alter any *cultural landscapes* as part of the project.

An exception is granted only if such action has been approved by an appropriate review body. This applies to buildings or landscapes listed locally, or in a Provincial, Territorial, or National Register.

GIB Credit 6: Historic Resource Preservation and Adaptive Use

1 point

Intent

To encourage the preservation and adaptive use of *historic buildings* and *cultural landscapes* that represent significant embodied energy and cultural value, in a manner that preserves historic materials and character-defining features.

Requirements

To achieve this credit, at least one historic building or cultural landscape must be present on the *project* site.

Do not demolish any historic buildings, or portions thereof, or alter any cultural landscapes as part of the project.

An exception is granted only if such action has been approved by an appropriate review body. For buildings or landscapes listed locally, approval must be granted by the local historic preservation review board, or equivalent. For buildings or landscapes listed in a state register or in the National Register of Historic Places, approval must appear in a programmatic agreement with the State Historic Preservation Office.

If any historic building in the project site is to be rehabilitated, rehabilitate in accordance with local review or federal standards for rehabilitation, whichever is more restrictive, using one of the following approaches:

- a. Obtain approval, in the form of a “certificate of appropriateness,” from a locally appointed historic preservation commission or architectural review board for any exterior alterations or additions
- b. If federal funds are used for the project, obtain confirmation from a state historic preservation office or the National Park Service that the rehabilitation satisfies the Secretary of the Interior’s Standards for Rehabilitation.
- c. If a building or site is listed in or determined eligible for the National Register of Historic Places but is not subject to federal or local review board review, include on the project team a preservation professional who meets the federal qualifications for historic architect and attests to conformance to the Secretary of the Interior’s Standards for the Treatment of Historic Properties.

Canadian Alternative Compliance Path

To achieve this credit, at least one historic building or cultural landscape must be present on the *project* site.

Do not demolish any historic buildings, or portions thereof, or alter any cultural landscapes as part of the project.

An exception is granted only if such action has been approved by an appropriate review body. This applies to buildings or landscapes listed locally, or in a Provincial, Territorial, or National Register.

If any historic building or landscape in the project site is to be rehabilitated, rehabilitate in accordance with local review or provincial/territorial or federal standards for conservation, whichever is more restrictive, using one of the following approaches:

- a. Obtain and document approval from a locally appointed heritage conservation review board for any alterations or additions.
- b. If government funds are used for the project, obtain and document approval from the provincial ministry or territorial office responsible for heritage conservation, or, for federally funded projects, from the appropriate federal heritage conservation agency, that the project work satisfies the *Standards and Guidelines for the Conservation of Historic Places in Canada*.
- c. If a building or site is listed in or determined eligible for the Canadian Register of Historic Places but is not subject to federal, provincial/territorial, or local review board review, include a conservation professional (depending on the project, a conservation architect, engineer, landscape architect and/or archaeologist) on the project team and provide an attestation to conformance of the project work to the *Standards and Guidelines for the Conservation of Historic Places in Canada*.

GIB Credit 7: Minimized Site Disturbance in Design and Construction

1 point

Intent

To preserve *existing*, non-invasive trees, *native plants* and pervious surfaces.

Requirements

OPTION 1. Development Footprint on Previously Developed Land

Locate 100% of the *development footprint* on areas that are *previously developed* and for which 100% of the *construction impact zone* is previously developed.

OR

OPTION 2. Undeveloped Portion of Project Left Undisturbed

Depending on the *density* of the *project*, do not develop or disturb a portion of the land that has not been previously developed on the site, exclusive of any land preserved by codified law or a prerequisite of LEED for Neighbourhood Development; or exempt areas designated as nonbuildable in land-use comprehensive plans and stipulate in *covenants, conditions, and restrictions* (CC&R) or other binding documents that the undisturbed area will be protected from development in perpetuity. Densities and minimum percentages are as follows (mixed-use projects must use the lowest applicable density or calculate a weighted average per the methodology in NPD Credit 2, Compact Development):

Table 1. Minimum undeveloped area, by project density

Residential density (DU/hectare)	Residential density (DU/acre)	Nonresidential density (FAR)	Minimum area left undisturbed
< 37	< 15	< .50	20%
37-52	15 – 21	.50 – 1.0	15%
> 52	> 21	> 1.0	10%

DU = dwelling unit; FAR = floor-area ratio.

For portions of the site that are not previously developed, identify construction impact zones that limit disturbance to a minimum of 40 feet (12 metres) beyond the building perimeter; 10 feet (3 metres) beyond surface walkways, patios, surface parking and utilities less than 12 inches (300 millimetres) in diameter; 15 feet (4.5 metres) beyond *street* curbs and main utility branch trenches; and 25 feet (7.5 metres) beyond constructed areas with permeable surfaces (such as pervious paving areas stormwater retention facilities, and playing fields) that require additional staging areas to limit compaction in the constructed zone.

AND

FOR ALL PROJECTS

Survey the site to identify the following:

- a. Trees in good or excellent condition, as determined by an arborist certified by the International Society of Arboriculture (ISA)
- b. Any heritage or champion trees of special importance to the community because of their age, size, type, historical association, or horticultural value, as defined by a government forester.
- c. All trees larger than 6 inches (150 millimetres) in diameter at breast height (dbh, 4 feet 6 inches (1.37 metres) above ground).
- d. Any *invasive* tree species present on the site, and whether those trees threaten the health of other trees to be preserved on the site, as determined by an ISA-certified arborist.

Preserve the following trees that are also identified as in good or excellent condition:

- a. All *heritage* or champion trees and trees whose dbh exceeds 50% of the state champion dbh for the species.
- b. A minimum of 75% of all non-invasive trees (including the above) larger than 18 inches (460 millimetres) dbh.
- c. A minimum of 25% of all non-invasive trees (including the above) larger than 12 inches (300 millimetres) dbh if deciduous, and 6 inches (150 millimetres) dbh if coniferous.

Tree condition ratings must be based on assessment by an ISA-certified arborist using ISA-approved assessment measures.

Develop a plan, in consultation with and approved by an ISA-certified arborist, for the health of the trees, including fertilization and pruning, and for their protection during construction. The plan must include protective fencing located 1 foot (300 millimetres) for each 1 inch (25 millimetre) calliper from the trunk or at the tree drip line, whichever is larger, and specify that if trenching or other disturbance is necessary within the protected zone, this work must be done by hand. If disturbance includes a permanent excavation of 3 feet (910 millimetres) or deeper, the excavation must start from a point not closer than 15 feet (4.6 metres) from the tree's drip line. If an ISA-certified arborist has determined that any trees to be preserved are threatened by invasive vegetation, develop a plan to reduce the invasive vegetation to the maximum extent possible. Stipulate in CC&R or other binding documents that the undisturbed area of the preserved trees will be protected from development in perpetuity

Key Definitions

For the meanings of other terms used in the requirements, refer to the Glossary.

previously developed altered by paving, construction, and/or land use that would typically have required regulatory permitting to have been initiated (alterations may exist now or in the past). Previously developed land includes a platted lot on which a building was constructed if the lot is no more than 1 acre (4050 square metres); previous development on lots larger than 1 acre (4050 square metres) is defined as the *development footprint* and land alterations associated with the footprint. Land that is not previously developed and altered landscapes resulting from current or historical clearing or filling, agricultural or forestry use, or preserved natural area use are considered undeveloped land. The date of previous development permit issuance constitutes the date of previous development, but permit issuance in itself does not constitute previous development.

GIB Credit 8: Stormwater Management

1–4 points

Intent

To reduce pollution and hydrologic instability from stormwater, reduce flooding, promote aquifer recharge, and improve water quality by emulating natural hydrologic conditions.

Requirements

Implement a comprehensive stormwater management plan for the *project* that retains on-site, through infiltration, evapotranspiration, and/or reuse, the rainfall volumes listed in Table 1. Rainfall volume is based on the project's *development footprint*, any other areas that have been graded so as to be effectively impervious, and any pollution generating pervious surfaces, such as landscaping, that will receive treatments of fertilizers or pesticides.

The percentile rainfall event (Table 1) is the total rainfall on a given day in the record that is greater than or equal to X percent of all rainfall events over a 20- to 40+-year period. For example, a 95th percentile event in a particular region might be 1.5 inches (38 millimetres), which would then be the volume to retain. To determine the volume to be retained, projects may use NOAA's published national rainfall data, run an approved stormwater model, or independently gather local rain gauge data and rank rainfall events. One hundred percent of the water volume from rainfall events up to the X percentile event must not be discharged to surface waters unless the harvested and reused runoff is authorized for discharge or allowed to be discharged into sanitary treatment systems.

Table 1. Points for retaining stormwater on-site

Percentile rainfall event (determines total volume from development footprint to be retained)	Points
80th	1
85th	2
90th	3
95th	4

Projects that earn at least 2 points under this credit may earn 1 additional point by meeting one of the following site characteristics:

- a. The project is located on a *previously developed site* (1 point).
- b. The project is located on a site that meets the definition of *brownfield* in SLL Credit 2, Brownfields Redevelopment (1 point).
- c. The project is designed to be transit ready by achieving the following (1 point):
 - At least 2 points under NPD Credit 1, Walkable Streets.
 - At least 2 points under NPD Credit 2, Compact Development.
 - At least 2 points under NPD Credit 3, Mixed-Use Neighbourhood Centres.

Select BMPs from the Washington State Department of Ecology’s Stormwater management Manual for Western Washington, Volume V, Runoff Treatment (2005 edition), or locally approved equivalent, whichever is more stringent. If the BMPs are comparable in stringency, choose BMPs that are most appropriate to the project site and region. BMPs must also comply with all federal, state, and local regulations.

For stormwater reuse systems not on a combined stormwater and sewer system, the total water reused for indoor use must not exceed 90% of the average annual rainfall.

Stormwater BMPs (except cisterns) must be designed to drain down within 72 hours.

Canadian Alternative Compliance Path

Implement a comprehensive stormwater management plan for the *project* that retains on-site, through infiltration, evapotranspiration, and/or reuse, the rainfall volumes listed in Table 1. Rainfall volume is based on the project's *development footprint*, any other areas that have been graded so as to be effectively impervious, and any pollution generating pervious surfaces, such as landscaping, that will receive treatments of fertilizers or pesticides.

The percentile rainfall event (Table 1) is the total rainfall on a given day in the record that is greater than or equal to X percent of all rainfall events over a 20- to 40+-year period. For example, a 95th percentile event in a particular region might be 1.5 inches (38 millimetres), which would then be the volume to retain. To determine the volume to be retained, projects may use the National Climate Data and Information Archive's published national rainfall data, run an approved stormwater model, or independently gather local rain gauge data and rank rainfall events. One hundred percent of the water volume from rainfall events up to the X percentile event must not be discharged to surface waters unless the harvested and reused runoff is authorized for discharge or allowed to be discharged into sanitary treatment systems.

Table 1. Points for retaining stormwater on-site

Percentile rainfall event (determines total volume from development footprint to be retained)	Points
80th	1
85th	2
90th	3
95th	4

Projects that earn at least 2 points under this credit may earn 1 additional point by meeting one of the following site characteristics:

- a. The project is located on a *previously developed site* (1 point).
- b. The project is located on a site that meets the definition of *brownfield* in SLL Credit 2, Brownfields Redevelopment (1 point).
- c. The project is designed to be transit ready by achieving the following (1 point):
 - At least 2 points under NPD Credit 1, Walkable Streets.
 - At least 2 points under NPD Credit 2, Compact Development.
 - At least 2 points under NPD Credit 3, Mixed-Use Neighbourhood Centres.

Select BMPs from the Washington State Department of Ecology's Stormwater management Manual for Western Washington, Volume V, Runoff Treatment (2005 edition), or locally approved equivalent, whichever is more stringent. If the BMPs are comparable in stringency, choose BMPs that are most appropriate to the project site and region. BMPs must also comply with all federal, provincial, territorial, and local regulations.

For stormwater reuse systems not on a combined stormwater and sewer system, the total water reused for indoor use must not exceed 90% of the average annual rainfall.

Stormwater BMPs (except cisterns) must be designed to drain down within 72 hours.

GIB Credit 9: Heat Island Reduction

1 point

Intent

To reduce heat islands to minimize effects on the microclimate and human and wildlife habitat.

Requirements

OPTION 1. Non-roof Measures

Use any combination of the following strategies for 50% of the non-roof site hardscape (including roads, sidewalks, courtyards, parking lots, parking structures, and driveways):

- Provide shade from open structures, such as those supporting solar photovoltaic panels, canopied walkways, and vine pergolas, all with a solar reflectance index (SRI) of at least 29.
- Use paving materials with an SRI of at least 29.
- Install an open-grid pavement system that is at least 50% pervious.
- Provide shade from tree canopy (within ten years of landscape installation).

OR

OPTION 2. High-Reflectance and Vegetated Roofs

Use roofing materials that have an SRI equal to or greater than the values in Table 1 for a minimum of 75% of the roof area of all new buildings within the *project*; or install a vegetated (“green”) roof for at least 50% of the roof area of all new buildings within the project. Combinations of SRI compliant and vegetated roofs can be used provided they satisfy the equation in Option 3.

Table 1. Minimum solar reflectance index value, by roof slope

Roof slope	SRI
Low ($\leq 2:12$)	78
Steep ($> 2:12$)	29

OR

OPTION 3. Mixed Non-roof and Roof Measures

Use any of the strategies listed under Options 1 and 2 that in combination meet the following criterion:

$\frac{\text{Area of Non-roof Measures}}{0.5} + \frac{\text{Area of SRI Roof}}{0.75} + \frac{\text{Area of Vegetated Roof}}{0.5} \geq \frac{\text{Total Site Hardscape Area}}{1} + \frac{\text{Total Roof Area}}{1}$
--

GIB Credit 10: Solar Orientation

1 point

Intent

To encourage energy efficiency by creating optimum conditions for the use of passive and active solar strategies.


Requirements

OPTION 1. Block Orientation (For Projects earning at least 2 Points under NPD Credit 2, Compact Development)

Locate the *project* on *existing blocks* or design and orient the project such that 75% or more of the blocks have one axis within plus or minus 15 degrees of geographical east-west, and the east-west lengths of those blocks are at least as long as the north-south lengths of the blocks.

Earn at least 2 points under NPD Credit 2, Compact Development.

Figure 1. Solar-oriented blocks with east-west lengths equal to or greater than north-south lengths, and east-west axis within 15 degrees of geographic east-west

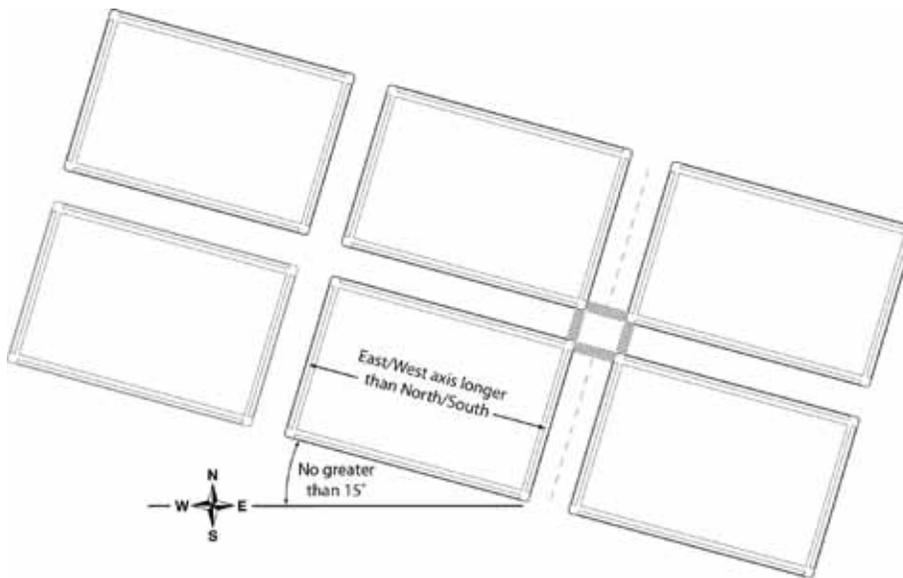


OR

OPTION 2. Building Orientation (Available For All Projects)

Design and orient 75% or more of the project's total building square footage (floor area) (excluding existing buildings) such that one axis of each qualifying building is at least 1.5 times longer than the other, and the longer axis is within 15 degrees of geographical east-west. The length-to-width ratio applies only to walls enclosing conditioned spaces; walls enclosing unconditioned spaces, such as garages, arcades, or porches, cannot contribute to credit achievement. The surface area of equator-facing vertical surfaces and slopes of roofs of buildings counting toward credit achievement must not be more than 25% shaded at the time of initial occupancy, measured at noon on the winter solstice.

Figure 2. Solar-oriented buildings with longer axis (at least 1.5 times length of other axis) within 15 degrees of geographic east-west

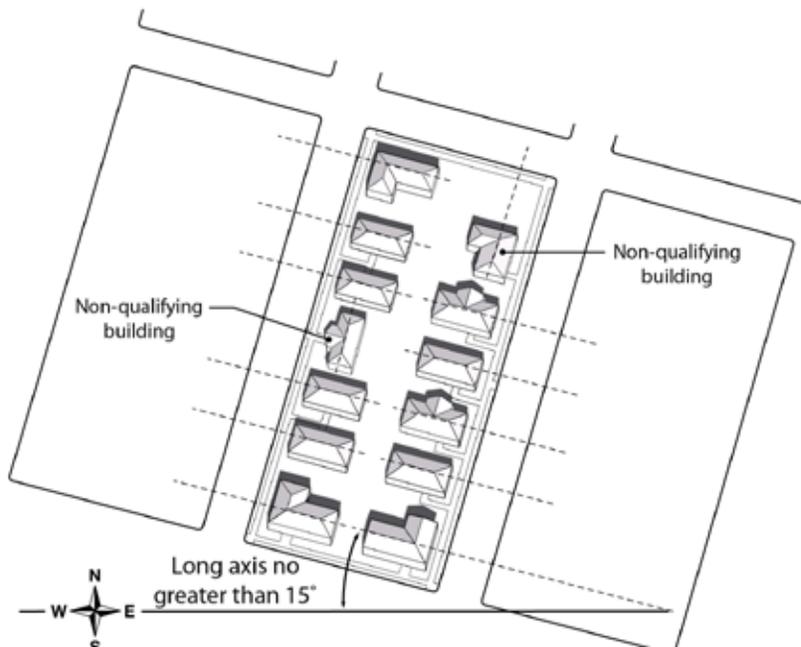

GIB Credit 11: On-Site Renewable Energy Sources

1–3 points

Intent

To encourage on-site renewable energy production to reduce the adverse environmental and economic effects associated with fossil fuel energy production and use.

Requirements

Incorporate on-site nonpolluting renewable energy generation, such as solar, wind, geothermal, small-scale or micro hydroelectric, and/or biomass, with production capacity of at least 5% of the project's annual electrical and thermal energy cost (exclusive of *existing* buildings). Points are awarded as listed in Table 1.

Table 1. Points for on-site renewable energy generation

Percentage of annual electrical and thermal energy cost	Points
5%	1
12.5%	2
20%	3

GIB Credit 12: District Heating and Cooling

2 points

Intent

To encourage the development of energy-efficient neighbourhoods by employing district heating and cooling strategies that reduce energy use and adverse energy-related environmental effects.

Requirements

Incorporate a district heating and/or cooling system for space conditioning and/or water heating of new buildings (at least two buildings total) such that at least 80% of the project's annual heating and/or cooling consumption is provided by the district plant. *Single-family residential* buildings and *existing buildings* of any type may be excluded from the calculation.

Each system component that is addressed by ANSI/ASHRAE/IESNA Standard 90.1-2007 must have an overall efficiency performance at least 10% better than that specified by the standard's prescriptive requirements. Additionally, annual district pumping energy consumption that exceeds 2.5% of the annual thermal energy output of the heating and cooling plant (with 1 kWh of electricity equal to 3,413 BTUs) must be offset by increases in the component's efficiency beyond the specified 10% improvement. Combined heat and power (CHP) district systems can achieve this credit by demonstrating equivalent performance.

GIB Credit 13: Infrastructure Energy Efficiency

1 point

Intent

To reduce adverse environmental effects from energy used for operating public infrastructure.

Requirements

Design, purchase, or work with the local government to install all new infrastructure, including but not limited to traffic lights, *street* lights, and water and wastewater pumps, to achieve a 15% annual energy reduction below an estimated baseline energy use for this infrastructure. The baseline is calculated with the assumed use of lowest first-cost infrastructure items.

GIB Credit 14: Wastewater Management

1–2 points

Intent

To reduce pollution from wastewater and encourage water reuse.

Requirements

Design and construct the *project* to retain on-site at least 25% of the average annual wastewater generated by the project (exclusive of *existing* buildings), and reuse that wastewater to replace *potable water*. An additional point may be awarded for retaining and reusing 50%. Provide on-site treatment to a quality required by state (provincial/territorial) and local regulations for the proposed reuse. The percentage of wastewater diverted and reused is calculated by determining the total wastewater flow using the design case after the GIB Prerequisite 3 calculations, and determining how much of that volume is reused on-site.

Table 1. Points for reusing wastewater

Percentage of wastewater reused	Points
25%	1
50%	2

GIB Credit 15: Recycled Content in Infrastructure

1 point

Intent

To use recycled and reclaimed materials to reduce the adverse environmental effects of extracting and processing virgin materials.

Requirements

Use materials for new infrastructure such that the sum of *postconsumer* recycled content, in-place reclaimed materials, and one-half of the *preconsumer* recycled content constitutes at least 50% of the total mass of infrastructure materials.

Count materials in all of the following infrastructure items as applicable to the *project*:

- a. Roadways, parking lots, sidewalks, unit paving, and curbs.
- b. Water retention tanks and vaults.
- c. Base and subbase materials for the above.
- d. Stormwater, sanitary sewer, steam energy distribution, and water piping.

Recycled content is defined in accordance with ISO/IEC 14021, Environmental labels and declaration, Self-declared environmental claims (Type II environmental labeling).

GIB Credit 16: Solid Waste Management Infrastructure

1 point

Intent

To reduce the volume of waste deposited in landfills. To promote the proper disposal of hazardous wastes.

Requirements

Meet at least four of the following five requirements and publicize their availability and benefits:

- a. Include as part of the *project* at least one recycling or reuse station, available to all project occupants, dedicated to the separation, collection, and storage of materials for recycling; or locate the project in a local government jurisdiction that provides recycling services. The recyclable materials must include, at a minimum, paper, corrugated cardboard, glass, plastics and metals.
- b. Include as part of the project at least one drop-off point, available to all project occupants, for potentially hazardous office or household wastes; or locate the project in a local government jurisdiction that provides collection services. Examples of potentially hazardous wastes include paints, solvents, oil, and batteries. If a plan for post-collection disposal or use does not exist, establish one;
- c. Include as part of the project at least one compost station or location, available to all project occupants, dedicated to the collection and composting of food and yard wastes; or locate the project in a local government jurisdiction that provides composting services. If a plan for post-collection use does not exist, establish one.
- d. On every mixed-use or nonresidential *block* or at least every 800 feet (240 metres), whichever is shorter, include recycling containers adjacent to other receptacles or recycling containers integrated into the design of the receptacle.
- e. Recycle and/or salvage at least 50% of nonhazardous construction and demolition debris. Develop and implement a construction waste management plan that, at a minimum, identifies the materials to be diverted from disposal and specifies whether the materials will be stored on-site or commingled. Excavated soil and land-clearing debris do not contribute to this credit. Calculations can be done by weight or volume but must be consistent throughout.

GIB Credit 17: Light Pollution Reduction

1 point

Intent

To minimize light trespass from project sites, reduce sky-glow to increase night sky access, improve night-time visibility through glare reduction, and reduce adverse effects on wildlife environments.

Requirements

“Shared areas” of a project are spaces and facilities dedicated to common use (publicly or privately owned).

In residential areas, at least 50% of the external luminaires must have fixture-integrated lighting controls that use motion sensors to reduce light levels by at least 50% when no activity has been detected for 15 minutes.

AND

In all shared areas, install automatic controls that turn off exterior lighting when sufficient daylight is available and when the lighting is not required during night-time hours; these lights must meet the total exterior lighting power allowance requirements in Table 3.

AND

Document which lighting zone or zones (Table 1) describe the project, and for all shared areas, follow the requirements in Table 2. If two or more different zones border the project, use the most stringent uplight requirements, and use light trespass requirements for the adjacent zone. Roadway lighting that is part of the project must meet the requirements for the appropriate zone.

For illuminance generated from a single luminaire placed at the intersection of a private vehicular driveway and public roadway accessing the site, project teams may use the centreline of the public roadway as the site boundary for a length of two times the driveway width centred at the centreline of the driveway when complying with the trespass requirements.

Compliance with the light trespass requirements may alternatively be met by using only luminaires that comply with Table 4 ratings for backlight and glare.

AND

Stipulate *covenants, conditions, and restrictions* (CC&R) or other binding documents to require continued adherence to the requirements.

Table 1. Lighting zones

Zone	Definition
LZ0	Undeveloped areas within national parks, state parks, forest land and rural areas and sites immediately adjacent to areas officially recognized as ecologically sensitive by the local zoning authority.
LZ1	Developed areas within national parks, state parks, forest land and rural areas.
LZ2	Areas predominantly consisting of residential zoning, neighbourhood business districts, light industrial with limited nighttime use, and residential mixed-use areas.
LZ3	All other areas not included in LZ0, LZ1, LZ2, or LZ4 (including commercial-industrial and high-density residential).
LZ4	High-activity commercial districts in major metropolitan areas (as designated by local jurisdiction, such as local zoning authority).

Table 2. Allowable light trespass and uplight, by lighting zone

Lighting zone	Maximum horizontal and vertical illuminance (fc) at site boundary	Maximum horizontal and vertical illuminance (fc) at specified distance beyond site boundary	Maximum percentage of fixture lumens emitted above 90° or higher from nadir (straight down)
LZ0	0	0 at 0 ft.	0%
LZ1	0.01	.01 at 0 ft.	0%
LZ2*	0.10	.02 at 10 ft. (3 m)	1%
LZ3*	0.20	.05 at 15 ft. (4.6 m)	2%
LZ4*	0.60	.05 at 15 ft. (4.6 m)	5%

fc = footcandle.
 * In LZ2, LZ3, and LZ4, for project boundaries that abut public rights-of-way, light trespass requirements may be met relative to the curb line instead of the project boundary.

Table 3. Allowable lighting power densities, by lighting zone

	Lighting zone				
	LZ0	LZ1	LZ2	LZ3	LZ4
All exterior improved areas (except those listed below)	0.0.04 W/sq. ft. (.43 W/m ²)	0.04 W/sf (.43 W/m ²)	0.06 W/sf (.65 W/m ²)	0.10 W/sf (1.08 W/m ²)	0.13 W/sf (1.4 W/m ²)
Walkways	0.7 W/lf (2.3 W/lm)	0.7 W/lf (2.3 W/lm)	0.7 W/lf (2.3 W/lm)	0.8 W/lf (2.6 W/lm)	1.0 W/lf (3.3 W/lm)
Landscaping	No allowance	0.04 W/sf (.43 W/m ²)	0.05 W/sf (.54 W/m ²)	0.05 W/sf (.54 W/m ²)	0.05 W/sf (.54 W/m ²)
Entrance door (per linear foot of doorway)	20W (66W/lm)	20W (66W/lm)	20W (66W/lm)	30W (98W/lm)	30W (98W/lm)
Entry canopy	0.25 W/sf (2.69 W/m ²)	0.25 W/sf (2.69 W/m ²)	0.25 W/sf (2.69 W/m ²)	0.40 W/sf (4.31 W/m ²)	0.40 W/sf (4.31 W/m ²)
Illuminated building façade	No allowance	No allowance	2.5W/lf (8.2 W/lm)	3.75W/lf (12.3 W/lm)	5.0W/lf (16.4 W/lm)

sf = square feet; lf = linear feet; lm = linear metre; m² = square metres
Note: The total exterior lighting power density allowance for all shared exterior applications is the sum of the specified allowances for individual illuminated areas. The following lighting is exempted when its controls meet the above requirements and are independent of the controls for nonexempt lighting:
a. Specialized signal, directional, and marker lighting associated with transportation.
b. Advertising and directional signage.
c. Lighting integral to equipment or instrumentation and installed by its manufacturer.
d. Lighting for theatrical purposes, including performance, stage, film, and video.
e. Lighting for athletic playing fields.
f. Temporary lighting (installed for no more than 30 days and then removed for at least 30 days).
g. Lighting for industrial production, material handling, transportation sites, and associated storage areas.
h. Theme elements in theme or amusement parks.
i. Lighting to highlight features of public monuments and registered *historic buildings* or landmark structures.

Alternative method for meeting light trespass requirements in Table 2

A luminaire may be used if it is rated as follows according to the lighting zone of the site. If the luminaire is installed in other than the intended manner, the rating must account for the actual photometric geometry. An exception applies if at least 98% of a luminaire’s emitted lumens are intercepted by man-made structures within the project. In either case, luminaires equipped with adjustable mounting devices permitting alteration of luminaire aiming in the field are not permitted.

Table 4. Allowable backlight and glare, by lighting zone

	Lighting zone				
	LZ0	LZ1	LZ2	LZ3	LZ4
Backlight luminaire rating					
> 2 mounting heights from property line	B0	B1	B2	B3	B4
1 to 2 mounting heights from property line and properly oriented*	B0	B1	B2	B3	B3
0.5 to 1 mounting height to property line and properly oriented*	B0	B0	B1	B2	B2
< 0.5 mounting height to property line adjacent to street and properly oriented*	B0	B0	B1	B2	B2
< 0.5 mounting height to property line and properly oriented*	B0	B0	B0	B1	B2
Glare luminaire rating					
	G0	G1	G2	G3	G4

* The luminaire must be mounted with backlight toward the property line.
Note: Backlight and glare ratings are defined based on specific lumen limits for IESNA TM-15-07 solid angles, Addendum A.

INNOVATION AND DESIGN PROCESS

IDP Credit 1: Innovation and Exemplary Performance

1–5 points

Intent

To encourage exemplary performance about the requirements set by the LEED for Neighbourhood Development Rating System and/or innovative performance in green building, smart growth, or new urbanist categories not specifically addressed by the LEED for Neighbourhood Development Rating System.

Requirements

In writing, identify the intent of the proposed innovation credit, the proposed requirement for compliance, the proposed submittals to demonstrate compliance, and the design approach and strategies that might be used to meet the requirements.

One point is awarded for each IDP Credit 1 earned, up to a total of 5. No more than 3 exemplary performance credits will be awarded in the Innovation and Design Process Category.

IDP Credit 2: LEED Accredited Professional

1 point

Intent

To support the integrated planning and design required for a LEED for Neighbourhood development encourage project and to streamline the application and certification process.

Requirements

At least one principal member of the project team must be a LEED Accredited Professional.

OR

At least one principal member of the project design team must be a professional who is credentialed in smart growth as determined by the US Natural Resources Defense Council in consultation with Smart Growth America.

OR

At least one principal member of the project design team must be professional who is credentialed in new urbanism as determined by the Congress for the New Urbanism.

Note: A separate LEED Accredited Professional exam track for professionals wanting to specialize in the LEED for Neighbourhood Development Rating System has become available as of 2010; this IDP credit can be achieved if a principal member of the project design team is accredited as a result of passing this exam.

REGIONAL PRIORITY CREDIT

RP Credit 1: Regional Priority

1–4 points

Intent

To encourage strategies that address geographically specific environmental, social equity, and public health priorities.

Requirements

Earn up to four of the six Regional Priority credits. These credits have been identified by subject matter experts representing the U.S. Green Building Council (regional councils and chapters), the Congress for the New Urbanism (U.S. chapters and membership in regions without chapters), and Smart Growth America (members of Smart Growth America’s State and Local Caucus or their designees) as having additional regional importance for the project’s location. A database of Regional Priority credits and their geographic applicability will be available on the USGBC website, www.usgbc.org.

One point is awarded for each Regional Priority credit earned, up to a maximum of 4. Non-U.S. projects are not eligible for Regional Priority credits.

APPENDIX. DIVERSE USES

Food Retail

Supermarket
Other food store with produce

Community-Serving Retail

Clothing store or department store selling clothes
Convenience store
Farmer's market
Hardware store
Pharmacy
Other retail

Services

Bank
Gym, health club, exercise studio
Hair care
Laundry, dry cleaner
Restaurant, café, diner (excluding establishments with only drive-throughs)

Civic and Community Facilities

Adult or senior care (licensed)
Child care (licensed)
Community or recreation centre
Cultural arts facility (museum, performing arts)
Educational facility (including K–12 school, university, adult education centre, vocational school, community college)
Family entertainment venue (theater, sports)
Government office that serves public on-site
Place of worship
Medical clinic or office that treats patients
Police or fire station
Post office
Public library
Public park
Social services centre


Adapted from Criterion Planners, INDEX neighbourhood completeness indicator, 2005.

GLOSSARY

Key Definitions

adjacent site a site having at least 25% of its boundary bordering parcels that are each at least 75% *previously developed*. A *street* or other right-of-way does not constitute previously developed land; instead, it is the status of the property on the other side of the street or right-of-way that matters. Any fraction of the boundary that borders waterfront other than a stream is excluded from the calculation. A site is still considered adjacent if the 25% adjacent portion of its boundary is separated from previously developed parcels by undeveloped, permanently protected land averaging no more than 400 feet (120 metres) in width and no more than 500 feet (150 metres) in any one place. The undeveloped land must be permanently preserved as natural area, riparian corridor, *park*, greenway, agricultural land, or designated *cultural landscape*. Permanent pedestrian paths connecting the project through the protected parcels to the bordering site may be counted to meet the requirement of SLL Prerequisite 1, Option 2 (that the *project* be connected to the adjacent parcel by a through-street or nonmotorized right-of-way every 600 feet (200 metres) on average, provided the path or paths traverse the undeveloped land at no more than a 10% grade for walking by persons of all ages and physical abilities).

Adjacent project site based on minimum 25% of perimeter adjacent to previously developed parcels, including allowance for permanently protected land between project boundary and previously developed parcels

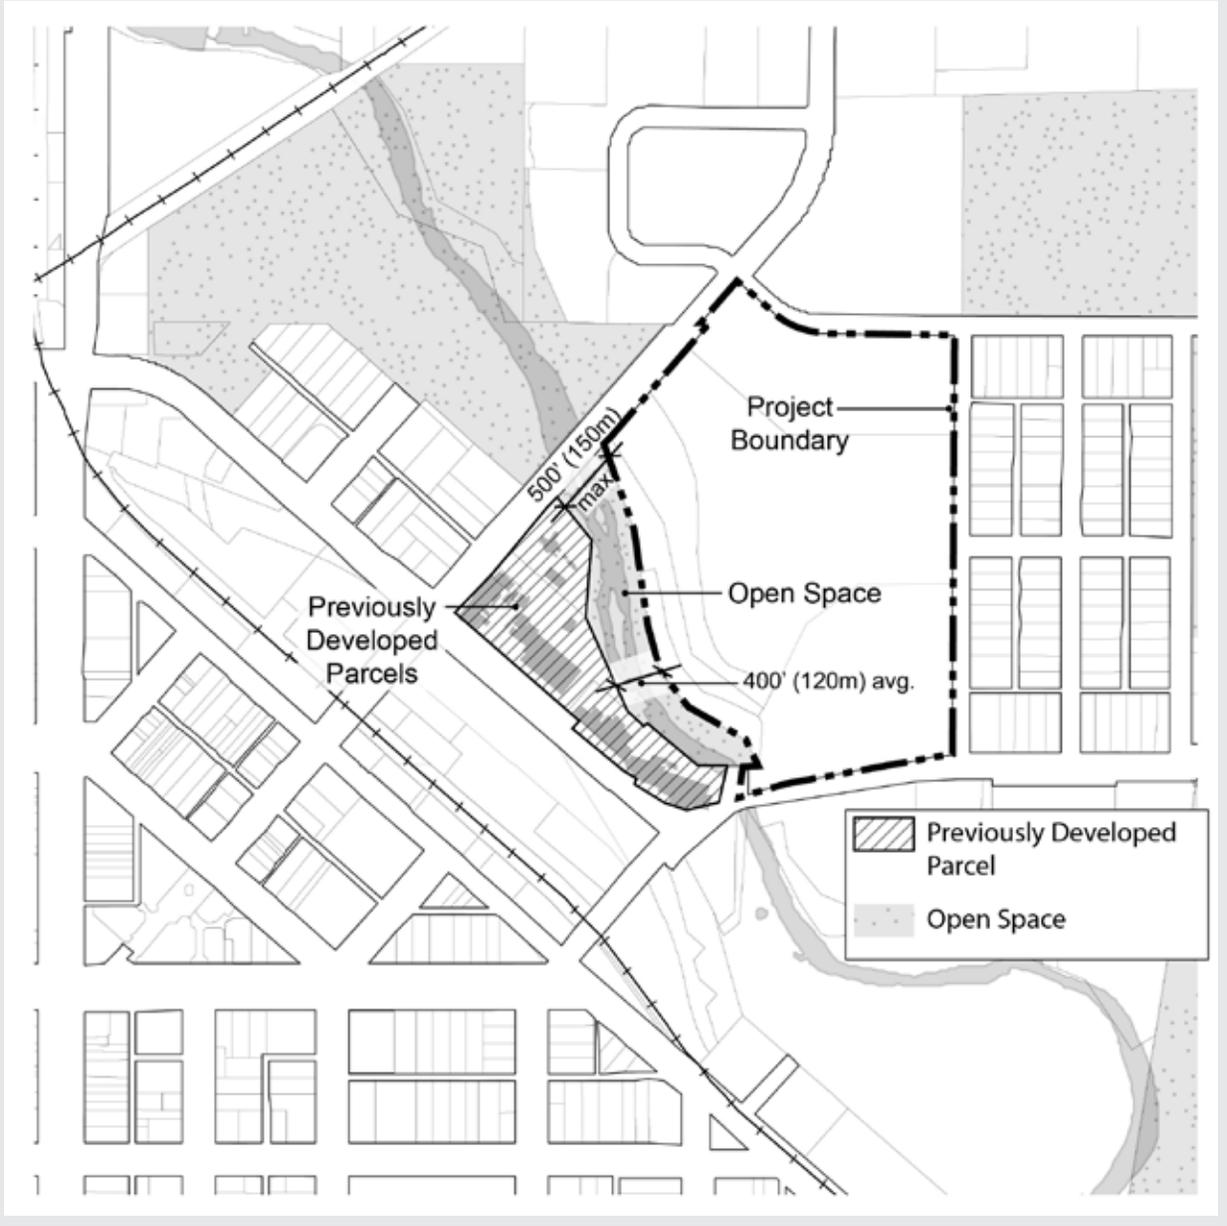

buildable land the portion of the site where construction can occur, including land voluntarily set aside and not constructed upon. When used in *density* calculations, buildable land excludes public rights-of-way and land excluded from development by codified law or LEED for Neighbourhood Development prerequisites. An *applicant* may exclude additional land not exceeding 15% of the buildable land base defined above, provided the following conditions are present:

- a. The land is protected from residential and nonresidential construction by easement, deed restriction, or other enforceable legal instrument.

AND

- b. Either 25% or more of the boundary of each contiguous parcel proposed for exclusion borders a *water body* or areas outside the *project boundary* that are protected by codified law; or ownership of, or management authority over, the exclusion area is transferred to a public entity.


connectivity the number of publicly accessible *street* intersections per square mile, including intersections of streets with dedicated *alleys* and transit rights-of-way, and intersections of streets with nonmotorized rights-of-way. If one must both enter and exit an area through the same intersection, such an intersection and any intersections beyond that point are not counted; intersections leading only to *culs-de-sac* are also not counted. The calculation of square mileage excludes *water bodies*, *parks* larger than 1/2 acre (2020 square metres), public facility campuses, airports, rail yards, slopes over 15%, and areas nonbuildable under codified law or the rating system. Street rights-of-way may not be excluded.

infill site a site that meets any of the following four conditions:


- a. At least 75% of its boundary borders parcels that individually are at least 50% *previously developed*, and that in aggregate are at least 75% previously developed.
- b. The site, in combination with bordering parcels, forms an aggregate parcel whose boundary is 75% bounded by parcels that individually are at least 50% previously developed, and that in aggregate are at least 75% previously developed.
- c. At least 75% of the land area, exclusive of rights-of-way, within a 1/2 mile (800 metre) distance from the *project boundary* is previously developed.
- d. The lands within a 1/2 mile (800 metre) distance from the project boundary have a *preproject connectivity* of at least 140 intersections per square mile (54 intersections per square kilometre).

A *street* or other right-of-way does not constitute previously developed land; it is the status of property on the other side or right-of-way of the street that matters. For conditions (a) and (b) above, any fraction of the perimeter that borders waterfront other than a stream is excluded from the calculation.

(a). Infill project site based on minimum 75% of perimeter adjacent to previously developed parcels

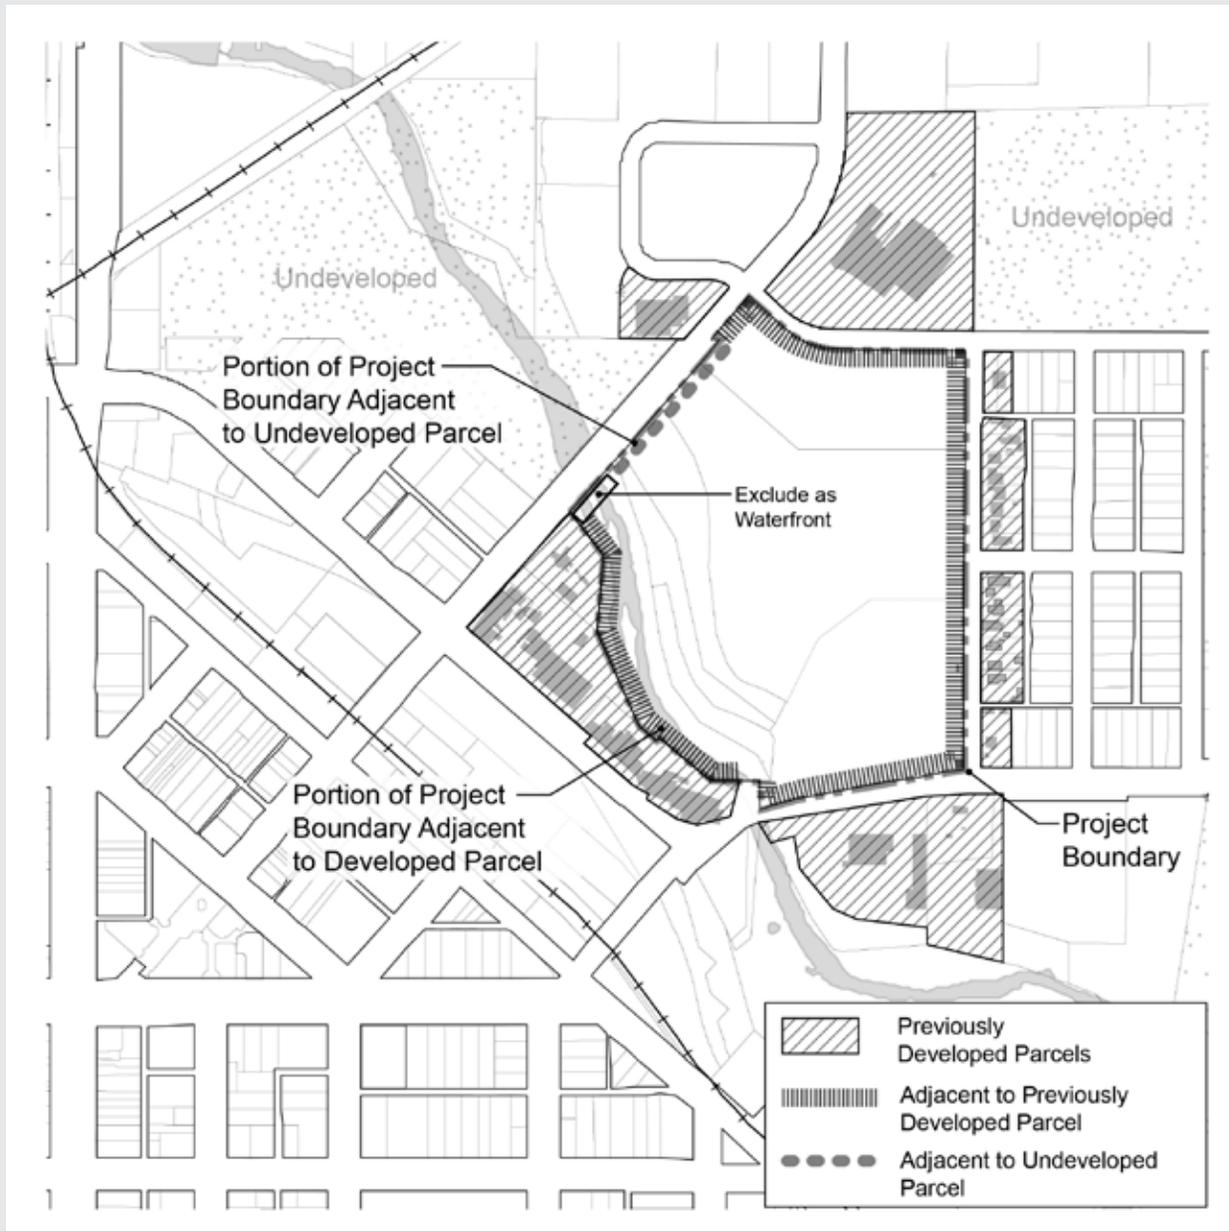

(b). Infill project site based on minimum 75% adjacent to previously developed parcels using project boundary and selected bordering parcels

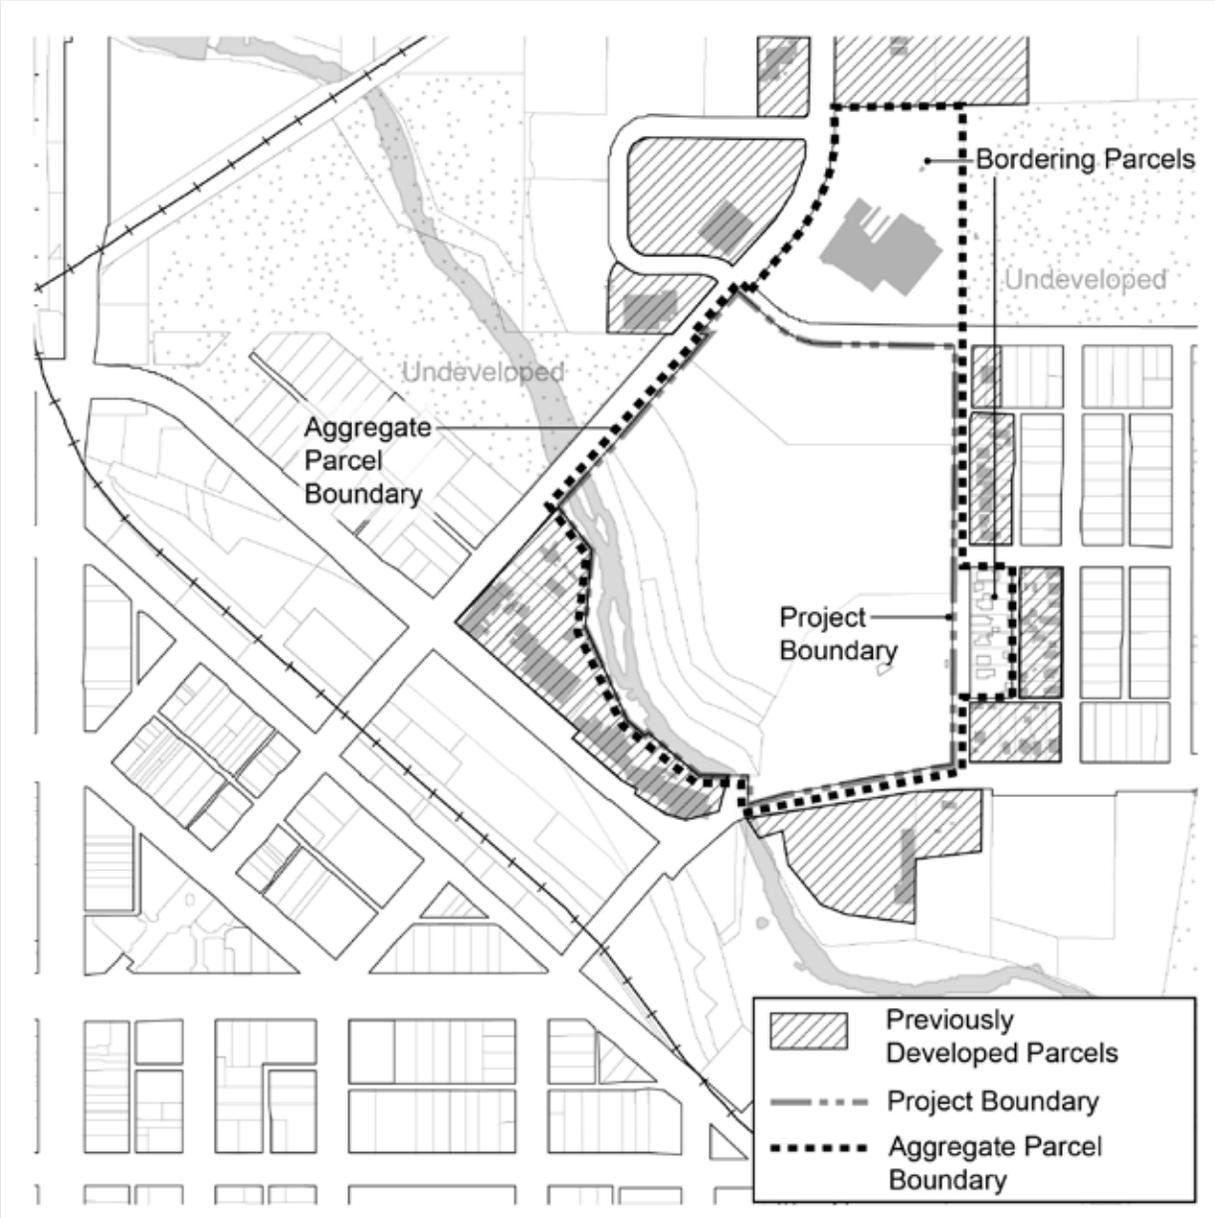

(c). Infill project site based on minimum 75% of land area within 1/2 mile (800 metres) of project boundary being previously developed



(d). Infill project site based on minimum 140 intersections/sq.mi. (54 intersections/ sq.km) within 1/2 mile (800 metres) of project boundary



previously developed altered by paving, construction, and/or land use that would typically have required regulatory permitting to have been initiated (alterations may exist now or in the past). Previously developed land includes a platted lot on which a building was constructed if the lot is no more than 1 acre (4050 square metres); previous development on lots larger than 1 acre (4050 square metres) is defined as the *development footprint* and land alterations associated with the footprint. Land that is not previously developed and altered landscapes resulting from current or historical clearing or filling, agricultural or forestry use, or preserved natural area use are considered undeveloped land. The date of previous development permit issuance constitutes the date of previous development, but permit issuance in itself does not constitute previous development.

ADDITIONAL DEFINITIONS

accessory dwelling unit a subordinate *dwelling unit* that is attached to a principal building or contained in a separate structure on the same property as the principal unit.

adapted (or introduced) plant a species that reliably grows well in a given habitat with minimal attention from humans in the form of winter protection, pest protection, water irrigation, or fertilization once its root systems are established in the soil. Adapted plants are low maintenance but not invasive.

alley a publicly accessible right-of-way, generally located midblock, that can accommodate slow-speed motor vehicles, as well as bicycles and pedestrians. An alley provides access to the side or rear of abutting properties for loading, parking, and other service functions, minimizing the need for these functions to be located along streets. It may be publicly dedicated or privately owned and deeded in perpetuity for general public use.

applicant the entity that prepares the LEED-ND *project* submission and is responsible for project implementation. An applicant may be the *developer* or another cooperating entity.

area median income the median household income of a census subdivision as determined by Statistics Canada.

bicycle network a continuous network consisting of any combination of physically designated in-*street* bicycle lanes at least 5 feet wide (1.5 metres), off-*street* bicycle paths or trails at least 8 feet (2.4 metres) wide for a two-way path and at least 5 feet wide (1.5 metres) for a one-way path, and/or streets designed for a target speed of 25 miles per hour (40 kilometres per hour) or slower.

block land bounded by the *project boundary*, transportation or utility rights-of-way that may be publicly dedicated or privately owned and deeded in perpetuity for general public use, waterfront, and/or comparable land division features.

brownfield site or **contaminated site** is a site where below-grade “substances occur in concentrations that:

1. are above background levels and pose, or are likely to pose, an immediate or long-term hazard to human health or the environment; or
2. exceed the levels specified in policies and regulations” (Treasury Board of Canada).

build-out the time at which all *habitable buildings* on the *project* are complete and ready for occupancy.

bus rapid transit an enhanced bus system that operates on exclusive bus lanes or other transit rights-of-way; it is designed to combine the flexibility of buses with the efficiency of rail.

census agglomerations (CAs) and census metropolitan areas (CMAs) consist of one or more adjacent municipalities situated around a major urban core. To form a census metropolitan area, the urban core must have a population of at least 100,000. To form a census agglomeration, the urban core must have a population of at least 10,000 (Statistics Canada).

common-use route is an interior pedestrian route that is meant to be accessed by all users of the building or a group of buildings, such as: the ground-floor lobby; hallways leading to elevators, stairs, washrooms, etc.; and tunnels and enclosed walkways connecting to adjacent buildings.

community-supported agriculture (CSA) a farm operation for which a community of individuals pledges support so that the farmland becomes, either legally or informally, the community’s farm. The growers and consumers provide mutual support, sharing the risks and benefits of food production. Consumers receive portions of the farm’s harvest throughout the growing season.

construction impact zone the *project’s development footprint* plus the areas around the improvement where construction crews, equipment, and/or materials are staged and moved during construction.

covenants, conditions, and restrictions limitations that may be placed on a property and its use and are made a condition of holding title or lease.

cul-de-sac a street segment that terminates without intersecting another street segment.

cultural landscape any geographical area that has been modified, influenced, or given special cultural meaning by people. *Designed cultural landscapes* were intentionally created by human beings; *Organically evolved cultural landscapes* developed in response to social, economic, administrative or religious forces interacting with the natural environment; and *Associative cultural landscapes* are distinguished by the power of their spiritual, artistic or cultural associations, rather than their surviving material evidence (Parks Canada/UNESCO).

density the amount of building structures constructed on the *project site*, measured for residential buildings as *dwelling units* per acre (hectare) of *buildable land* available for residential uses, and for nonresidential buildings as the *floor-area ratio* of buildable land area available for nonresidential uses. In both cases, structured parking is excluded.

developer a public and/or private entity that controls a majority of the *project's buildable land* and is committed to making a majority of the investments required for the project implementation described in the LEED-ND submission.

development footprint the total land area of a *project site* covered by buildings, *streets*, parking areas, and other typically impermeable surfaces constructed as part of the project.

dissemination area (DA) is a small area composed of one or more neighbouring blocks, with a population of 400 to 700 persons. All of Canada is divided into dissemination areas. The dissemination area is a new standard geographic area. It replaces the enumeration area (EA) as a basic unit for dissemination (Statistics Canada).

dwelling unit living quarters intended for long-term occupancy that provide facilities for cooking, sleeping, and sanitation. This does not include hotel rooms.

emergency lighting as defined by the Illuminating Engineering Society of North America is lighting designed to supply illumination essential to the safety of life and property in the event of failure of the normal supply.

employment centre a nonresidential area of at least 5 acres (2 hectares) with a job density of at least 50 employees per net acre (120 employees per net hectare).

existing present on the date of submission of LEED-ND certification documents; similarly, an element or condition that **exists** is present on the date that LEED-ND certification documents are submitted.

floor-area ratio (FAR) the *density* of nonresidential land use, exclusive of parking, measured as the total nonresidential building floor area divided by the total *buildable land* area available for nonresidential structures. For example, on a site with 10,000 square feet (square metres) of buildable land area, an FAR of 1.0 would be 10,000 square feet (square metres) of building floor area. On the same site, an FAR of 1.5 would be 15,000 square feet (square metres) of built floor area; an FAR of 2.0 would be 20,000 built square feet (square metres) and an FAR of 0.5 would be 5,000 built square feet (square metres).

functional entry a building opening designed to be used by pedestrians and open during regular business hours. This does not include any door exclusively designated as an emergency exit, or a garage door not designed as a pedestrian entrance.

greywater is defined by the American Uniform Plumbing Code (UPC) in its Appendix G, Gray Water Systems for Single-Family Dwellings, as “untreated household waste water which has not come into contact with toilet waste. Greywater includes used water from bathtubs, showers, bathroom wash basins, and water from clothes-washer and laundry tubs. It must not include waste water from kitchen sinks or dishwashers.” The International Plumbing Code (IPC) defines greywater in its Appendix C, Gray Water Recycling Systems, as “waste water discharged from lavatories, bathtubs, showers, clothes washers and laundry sinks.” Some provincial and local authorities allow kitchen sink wastewater to be included in greywater. Other differences with the UPC and IPC definitions can likely be found in provincial and local codes. Project teams should comply with greywater definitions as established by the authority having jurisdiction in the project areas.

habitable building a structure intended for living, working, or other types of occupancy. Habitable structures do not include stand-alone garages and utility structures such as pump stations.

heat island thermal gradient differences between developed and undeveloped areas.

historic building a building or structure listed or determined to be eligible as a historic building or structure or as a contributing building or structure in a designated heritage district, due to its historic, architectural, engineering, archaeological, or cultural significance. The building or structure must be designated as historic by a local heritage review board or similar body, be listed locally, or in a Provincial, Territorial, or National Register, or have been determined eligible for listing in the National Register.

heritage district a place comprising a group of buildings, structures, landscapes and/or archaeological sites and their spatial relationships where built forms are often the major defining features and where the collective identity has heritage value for a community, province, territory or the nation (Parks Canada).

heritage tree an outstanding specimen because of its size, form, shape, age, colour, rarity, genetic constitution or other distinctive community landmark; a specimen associated with an historic person, place, event or period; representative of a crop grown by ancestors and their successors that is at risk of disappearing from cultivation; a specimen recognized by members of a community as deserving heritage recognition (Trees Ontario).

Home Energy Rating System (HERS) index a scoring system established by the Residential Energy Services Network (RESNET) in which a home built to the specifications of the HERS Reference Home (based on the 2006 International Energy Conservation Code) scores 100, and a net zero energy home scores 0. The lower a home’s HERS Index, the more energy efficient it is.

invasive plant either an indigenous or nonindigenous species or strain that is characteristically adaptable, aggressive, has a high reproductive capacity, and tends to overrun the ecosystems it inhabits.

major renovations extensive alteration work in addition to work on the exterior shell of the building and/or primary structural components and/or the core and peripheral MEP and service systems and/or site work. Typically, the extent and nature of the work is such that the primary function space cannot be used for its intended purpose while the work is in progress and where a new certificate of occupancy is required before the work area can be re-occupied.

metropolitan (metro) and micropolitan (micro) statistical area a geographic entity defined by the U.S. Office of Management and Budget for use by federal statistical agencies in collecting, tabulating, and publishing federal statistics. A metro area contains a core urban area with a population of 50,000 or more, and a micro area contains an urban core with a population between 10,000 and 50,000. Each metro or micro area consists of one or more counties and includes the counties containing the core urban area, as well as any adjacent counties that have a high degree of social and economic integration (as measured by commuting to work) with the urban core. “Core-based statistical area” (CBSA) encompasses both metro and micro areas.

multiunit residential consisting of four or more residential units sharing a common entry.

native (or indigenous) plants are adapted to a given area during a defined time period and are not invasive. In North America, the term often refers to plants growing in a region prior to the time of settlement by people of European descent. Cultivars of native plants may be considered native plants.

neighbourhood greenways are at least 8 metres (26 feet) in width and one block in length, are publicly accessible, have vegetation and/or water features, and are part of a neighbourhood-wide integrated pedestrian and/or bikeway network. Non-vegetated components are generally limited to lighting, public seating, walkways and bikeways.

park a publicly accessible area that is permanently maintained in a semi natural condition for human recreation and relaxation; it has soil, grass, water, flora, and/or recreation improvements.

Paseo (promenade) a publicly accessible pedestrian path, at least 4 feet (1.2 metres) wide and no more than 12 feet (4 metres) wide, that provides shortcuts between buildings and through the block, connecting street frontages to rear parking areas, midblock courtyards, *alleys*, or other streets. A paseo (promenade) may be roofed for up to 50% of its length and may be privately owned or publicly dedicated.

planned diverse use a shop, service, or facility outside the *project boundary* that has received a building permit and is under construction at the time of the first certificate of occupancy is issued for any building in the LEED-ND *project*.

planned occupancy the highest estimate of building occupants based on planned use(s) and industry standards for square foot (square metre) requirements per employee (see USDOE EIA CBECS survey for suggested default nonresidential occupancies).. The minimum planned occupancy for *multiunit residential* buildings is 1 person for a studio unit, 1.5 persons for a one-bedroom unit, and 1.25 persons per bedroom for a two- bedroom or larger unit.

plaza a publicly accessible gathering space that is integrated into the street network and allows vehicular, bicycle, and/or pedestrian travel. A plaza is generally paved, is spatially defined by building fronts paralleling at least two-thirds of its perimeter, and may be privately owned or publicly dedicated.

prime farmland includes Class 1, 2 and 3 lands as defined by the Canada Land Inventory for rural Canada. Previously developed land is not considered prime farmland.

postconsumer generated by households or commercial, industrial, or institutional facilities in their role as end-users of a product, which can no longer be used for its intended purpose.

potable water meets or exceeds federal and provincial drinking water quality standards and is approved for human consumption by the provincial or local authorities having jurisdiction; it may be supplied from wells or municipal water systems.

preconsumer diverted from the waste stream during the manufacturing process. It does not include thereutilization of materials such as rework, regrind or scrap generated in a process and capable of being reclaimed within the same process that generated it.

predevelopment before any development occurred on the site. Predevelopment conditions describe the natural conditions of the site prior to any human alteration, such as development of roads or buildings.

previously developed site a site that, *preproject*, consisted of at least 75% *previously developed* land.

preproject before the LEED-ND project was initiated, but not necessarily before any development or disturbance took place. Preproject conditions describe the state of the project site on the date the *developer* acquired rights to a majority of its *buildable land* through purchase or option to purchase.

prime soil earth with chemical, hydrographic, and topological properties that make it especially suited to the production of crops, as defined by the U.S. Natural Resources Conservation Service.

project the land, water, and construction that constitutes the project application. A project *applicant* does not have to own or control all land or water within a *project boundary*, but all the area within the project boundary must comply with prerequisites and attempted credits.

project boundary the platted property line of the project defining land and water within it. Projects located on publicly owned campuses that do not have internal property lines must delineate a sphere-of-influence line to be used instead. *Project site* is equivalent to the land and water inside the project boundary. The project must not contain noncontiguous parcels, but parcels can be separated by public rights-of-way. Projects may also have enclaves of nonproject properties that are not subject to the rating system, but such enclaves cannot exceed 2% of the total project area and cannot be described as certified.

school a kindergarten, elementary, or secondary institution for the academic instruction of children.

single-family residential any residential unit other than *multiunit residential*, including single, duplex, triplex, row house, townhouse and semi attached residential building types.

street a dedicated right-of-way that can accommodate one or more modes of travel, excluding *alleys* and *paseos* (*promenades*). A street is suitable for primary entrances and provides access to the front and/or sides of buildings and lots. A street may be privately owned as long as it is deeded in perpetuity for general public use. A street must be an addressable thoroughfare (for mail purposes) under the standards of the applicable regulating authority.

square (also **green**) a publicly accessible open area for gatherings that is wholly or partially bounded by segments of the *street* network. A square can be landscaped or landscaped and paved, is spatially defined by building fronts paralleling at least 45% of its perimeter, and may be privately owned or publicly dedicated.

unique soil earth with chemical, hydrographic, and topological properties that make it especially suited to specific crops, as defined by the U.S. Natural Resources Conservation Service.

walk distance the distance that a pedestrian must travel between origins and destinations without obstruction, in a safe and comfortable environment on a continuous network of sidewalks, all-weather-surface footpaths, crosswalks, *woonerfs*, or equivalent pedestrian facilities.

water body the surface water of a stream (first-order and higher, including intermittent streams), arroyo, river, canal, lake, estuary, bay, or ocean, excluding irrigation ditches.

water and wastewater infrastructure publicly owned water and wastewater infrastructure; this excludes septic and mound wastewater treatment systems.

wetland an area that is inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas, but exclude irrigation ditches unless delineated as part of an adjacent wetland.

woonerf a *street*, also known as a home zone, shared zone, or living street, where pedestrians have priority over vehicles and the posted speed limit is no greater than 10 miles per hour. Physical elements within the roadway, such as shared surfaces, plantings, street furniture, parking, and play areas, slow traffic and invite pedestrians to use the entire right-of-way.

vehicle miles traveled (VMT) (vehicle kilometres traveled - VKT) the number of miles (kilometres) driven by motorists in a specified time period, such as a day or a year, in absolute or per capita terms.